

Typical Features
◆ Wide input voltage range: 85-265VAC/120-380VDC
◆ No load power consumption ≤ 0.35W (TYP.)
◆ Transfer Efficiency (TYP. 77%)
◆ Switching Frequency: 65KHz
◆ Protections: short circuit, over current, over temperature
◆ Isolation voltage: 3600Vac
◆ Meet IEC62368/UL62368/EN62368 test standard
◆ With CE, RoHS certificate
◆ Plastic case, meet UL94 V-0 class
◆ PCB mounting



**Application Field**

**FA3-220SXXA2N3 Series**----- a compact size, high efficient, pass CE standard power module offered by Aipu. It features universal input voltage range, AC and DC dual-use, low ripple, low temperature rise, low power consumption, high efficiency, high reliability, safer isolation, good EMC performance. EMC and Safety standard meet international EN55032, IEC/EN61000. These series have important application for power, industry, instrument and smart home field. For harsh EMC environment, the application circuit in the datasheet is strongly recommended.

**Typical Product List**

Certificate	Part No.	Output Specifications			Max. Capacitive Load	Ripple & Noise 20MHz (Max)	Efficiency@ Full Load, 220Vac (Typical)
		Power	Voltage	Current			
		(W)	u F	Io1(m A)			
CE/RoHS	FA3-220S3V3A2N3	2	3.3	600	500	100	67
CE/RoHS	FA3-220S3V8A2N3	2.3	3.8	600	500	100	68
CE/RoHS	FA3-220S05A2N3	3	5	600	500	100	71
CE/RoHS	FA3-220S09A2N3	3	9	333	300	120	73
CE/RoHS	FA3-220S12A2N3	3	12	250	300	120	75
CE/RoHS	FA3-220S13A2N3	3	13	250	300	120	75
CE/RoHS	FA3-220S15A2N3	3	15	200	200	140	75
CE/RoHS	FA3-220S24A2N3	3	24	125	47	140	77

Note 1: Due to space limitations, above is only a part of our product list, please contact our sales team for more items.

Note 2: The typical value of output efficiency is based on module is full loaded and burned-in after half an hour.

Note 3: The fluctuation range of full load efficiency(% ,TYP) in table is ±2%, full load efficiency= output power/module's input power.

Note 4: Ripple & Noise is tested by twisted pair method, for details please see(Ripple & Noise Test) at back.

Input Specifications					
Item	Operating Condition	Min	Typ.	Max	Unit
Input Voltage Range	AC input	85	220	265	VAC
	DC input	120	310	380	VDC
Input Frequency range	-	47	50	63	Hz
Input Current	115VAC	/	/	0.07	A
	220VAC	/	/	0.05	
Surge Current	115VAC	/	/	10	
	220VAC	/	/	20	
Leakage Current	-	0.5mA TYP/230VAC/50Hz			
Recommended External Input Fuse	-	1A-2A/250VAC slow fusing			
Hot Plug	-	unavailable			
Remote Control Terminal	-	unavailable			

Output Specifications					
Item	Operating Condition	Min	Typ.	Max	Unit
Voltage Accuracy	Input voltage 220V, any load	-	±3.0	±5.0	%
Line Regulation	Nominal load	-	-	±1.0	%
Load Regulation	Nominal input voltage, 20%~100% load	-	-	±4.0	%
No Load Consumption	Input 115VAC	-	0.15	0.35	W
	Input 220VAC	-			
Minimum Load	Single Output	10	-	-	%
Start up Delay Time	Nominal input voltage (full load)	-	800	-	mS
Power-off Holding Time	Input 220VAC (full load)	-	100	-	mS
Dynamic Response	25%~50%~25%	-5.0	-	+5.0	%
	50%~75%~50%	-5.0	-	+5.0	mS
Output Overshoot	Full input voltage range	≤10%Vo			%
Short circuit Protection		Continuous, self-recovery			Hiccup
Temperature Drift	-	-	±0.03%	-	%/°C
Over Current Protection	Input 220VAC	≥120% Io self-recovery			Hiccup


**General Specifications**

Item	Operating Condition	Min	Typ.	Max	Unit
Switching Frequency	-	-	65	-	KHz
Operating Temperature	-	-40	-	+75	°C
Storage Temperature	-	-40	-	+85	
Soldering Temperature	Wave soldering	260±4°C, time 5-10S			
	Manual soldering	360±8°C, time 4-7S			
Relative Humidity	-	10	-	90	%RH
Isolation Voltage	Input-Output, Test 1min,leakage current≤5mA	3600	-	-	VAC
Insulation Resistance	Input-Output@ DC500V	100	-	-	MΩ
Safety Standard	-	EN62368, IEC62368			
Vibration	-	10-55Hz,10G,30Min,alongX,Y,Z			
Safety Standard	-	CLASS II			
Class of Case Material	-	UL94 V-0 Class			
MTBF	-	MIL-HDBK-217F 25°C >300,000H			

**EMC Characteristics**

Total Item	Sub Item	Test Standard	Class	
EMC	EMI	CE	CISPR22/EN55032 CLASS B	
		RE	CISPR22/EN55032 CLASS B	
	EMS	RS	IEC/EN61000-4-3	10V/m Perf.Criteria B
		CS	IEC/EN61000-4-6	3Vr.m.s Perf.Criteria B
		ESD	IEC/EN61000-4-2	Contact ±6KV / Air ±8KV Perf.Criteria B
		Surge	IEC/EN61000-4-5	±2KV Perf.Criteria B (see recommended circuit 2)
		EFT	IEC/EN61000-4-4	±2KV Perf.Criteria B
		Voltage dips, short interruptions and voltage variations immunity	IEC/EN61000-4-11	0%~70% Perf.Criteria B

**Dimension**

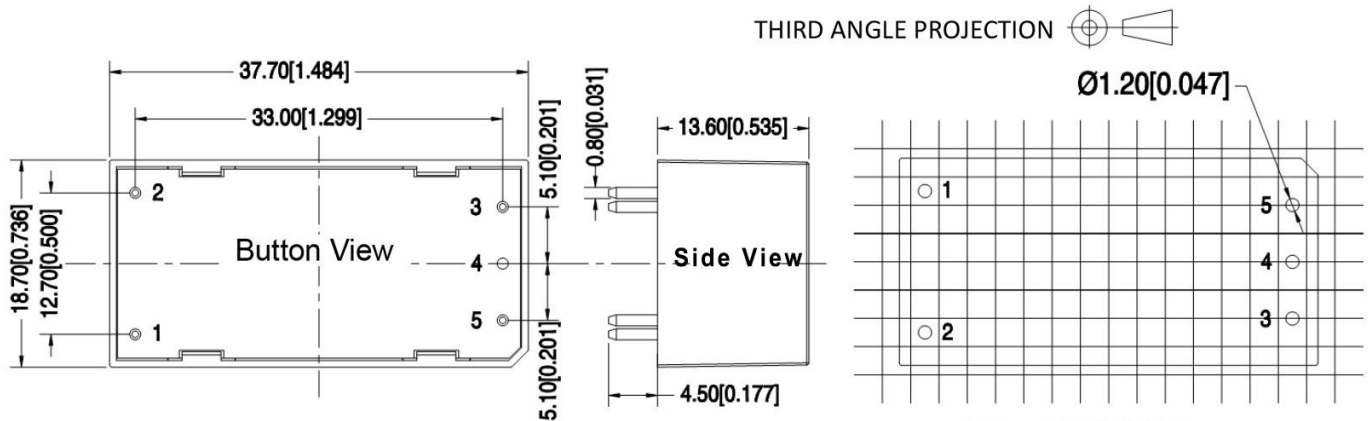

Note:  
Unit:mm[inch]  
Pin diameter tolerance:  $\pm 0.10[\pm 0.004]$   
General tolerances: $\pm 0.50[\pm 0.020]$

Note: Grid: 2.54\*2.54mm

Pin out	
Pin	Function
1	AC(N)
2	AC(L)
3	+Vo
4	NC
5	-Vo

Packing Code	L x W x H	
A2	37.7X18.7X13.6mm	1.484X0.736X0.535inch

**Pin Specification**

Pin	1	2	3	4	5
Single(S)	AC(N)	AC(L)	+Vo	NC	-Vo


Note: If the definition of pin is not in accordance with the model selection manual, please refer to the label on actual item.

**Ripple & Noise Test: (Twisted Pair Method 20MHZ bandwidth)**



**Test Method:**

(1) 12# twisted pair to connect, Oscilloscope bandwidth set as 20MHz, 100M bandwidth probe, terminated with 0.1uF polypropylene capacitor and 10uF high frequency low resistance electrolytic capacitor in parallel, oscilloscope set as Sample pattern.

(2) Input terminal connect to power supply, output terminal connect to electronic load through jig plate, Use 30cm±2 cm sampling line, Power line selected from corresponding diameter wire with insulation according to the flow of output current.

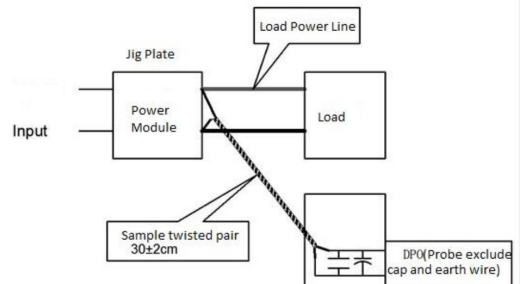

**Product Characteristic Curve**

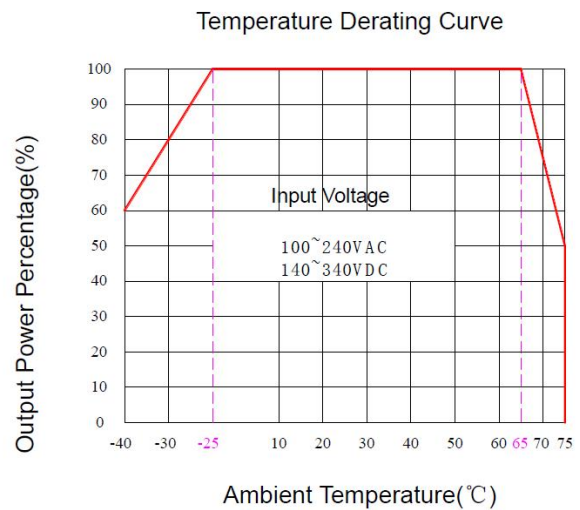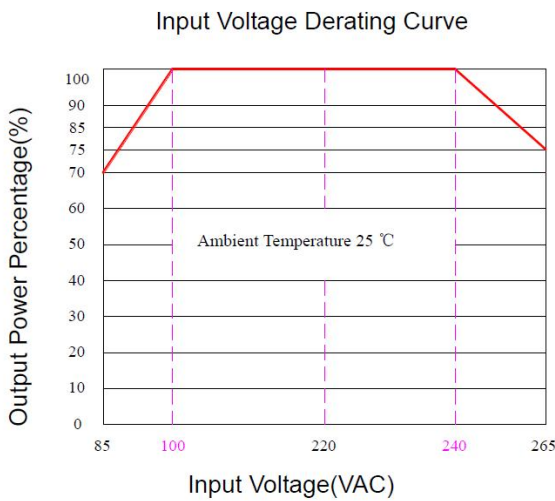


Note 1: Input Voltage should be derated based on Input voltage derating curve when it is 85~100VAC/120~140VDC and 240~265VAC/340~380VDC.

Note 2: Our product is suitable to use under natural air cooling environment, if use it under closed condition, please contact with us.

**Typical Application Circuit and EMC Recommended Circuit**

**1. Typical Application Circuit**

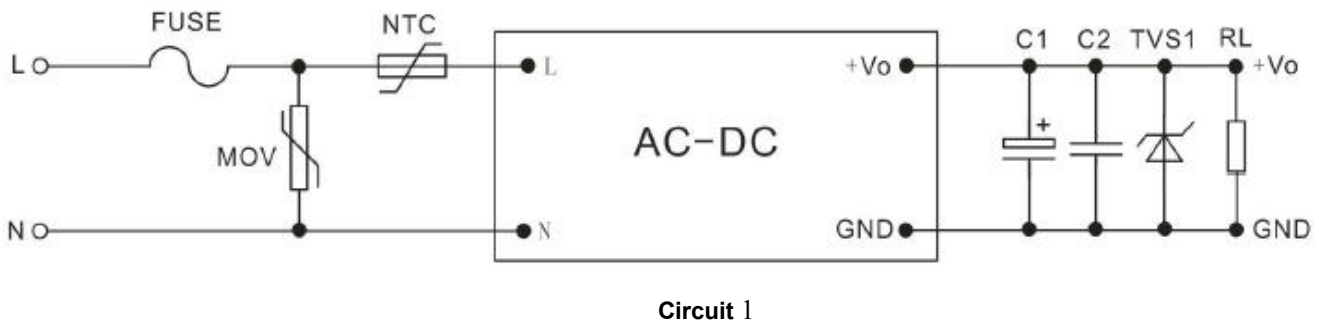


Output Voltage	3V3 5V	9V	12V 13V	15V	24V	48V
TVS Tube Recommended	SMBJ7.0A	SMBJ12A	SMBJ20A	SMBJ20A	SMBJ30A	SMBJ64A
C1 Capacitor Recommended	330uF/10V	220uF/16V	220uF/16V	100uF/25V	47uF/35V	22uF/63V

Note:

Output filter capacitor C1 is electrolytic capacitor, recommend to use high frequency low resistance ones, capacitance and current please refer to the technical specification from each supplier. C2 is ceramic capacitor, to filter high frequency noise. TVS tube is a recommend component to protect post-circuit if converter fails. Recommend to connect external FUSE, model: 1A/250V slow-fusing. Recommend to connect NTC thermal resistor, type: 10D-7. Recommend to connect to MOV piezoresistor, type: 10D511K.

**2. EMC recommended circuit**

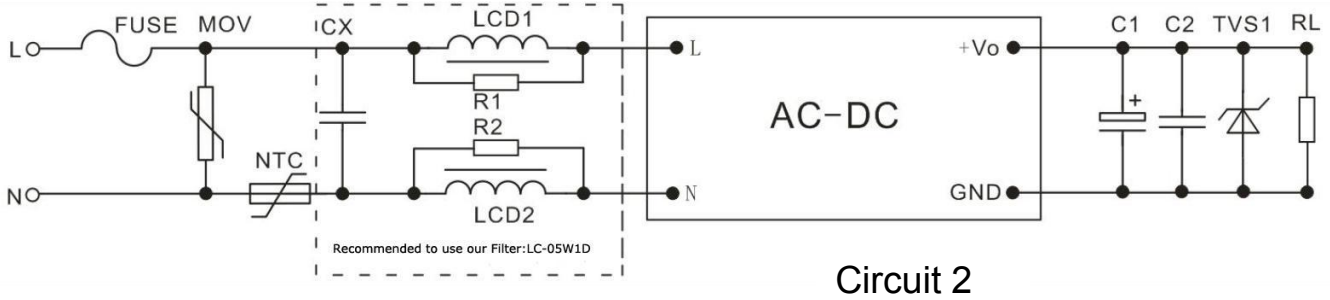

**Circuit 2**

Component	Recommend Value	Component	Recommend Value
MOV	10D511K	NTC	10D-7
CX	0.1uF/275VAC	LLCD1, LCD2	1mH/1W Color Ring Inductor
FUSE	1A/250V,slow-fusing,necessary		
R1、R2	2KΩ, 5%, above 1/8W		

**Note:**

1. The product should be used within the specification range, or it will cause permanent damage to it;
2. The input terminal should connect to fuse;
3. If the product is worked under the minimum requested load, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
4. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
5. Unless otherwise specified, parameters in this datasheet were measured under the conditions of **Ta=25°C**, **humidity<75%** with nominal input voltage and rated output load(pure resistance load);
6. All index testing methods in this datasheet are based on our Company's corporate standards;
7. The performance indexes of the product models listed in this manual are as above, but some indexes of non-standard model products will exceed the above-mentioned requirements, please directly contact our technician for specific information;
8. We can provide product customization service,
9. Specifications are subject to change without prior notice, please follow up with our website for newest manual.

**Guangzhou Aipu Electron Technology Co., Ltd**

Address: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, China.

Tel: 86-20-84206763 Fax: 86-20-84206762 HOTLINE: 400-889-8821

E-mail: sales@aipu-elec.com Website: <https://www.aipupower.com>