

Typical Features	
◆	Wide input voltage range: 85-265VAC/120-380VDC
◆	No load power consumption ≤ 0.20W (Typ.)
◆	Transfer Efficiency (TYP. 76%)
◆	Switching Frequency: 65KHz
◆	Protections: short circuit, over current, over temperature
◆	Isolation voltage: 3000Vac
◆	Meet IEC62368/UL62368/EN62368 test standard
◆	Conform to CE & RoHS standard
◆	Encapsulated plastic case, compliant with UL94V-0 level



Application Field

FA3-220SXXG2N3 Series----- a compact size, high efficient, power module offered by Aipu. It features universal input voltage range, AC and DC dual-use, low ripple, low temperature rise, low power consumption, high efficiency, high reliability, safer isolation, good EMC performance. EMC and safety standard could meet international EN55032, IEC/EN61000 standard. This series have important application for power, industry, instrument and civil field. For harsh electromagnetic compatibility environment, please refer to the application circuit provided by our company.

Typical Product List

Certificate	Part No.	Output Specifications			Max. Capacitive Load	Ripple & Noise 20MHz (220Vac Full Load Max)	Efficiency@ Full Load, 220Vac (Typical)
		Power	Voltage	Current			
		(W)	Vo1(V)	Io1(m A)			
/	*FA3-220S05G2N3	3	5	600	800	120	72
	FA3-220S12G2N3	3	12	250	400	120	76
	*FA3-220S24G2N3	3	24	125	200	150	78

- Note 1: The typical value of output efficiency is based on module is full loaded and burned-in after half an hour.
- Note 2: Ripple & Noise is tested by twisted pair method, for details please see(Ripple& Noise Test) at back.
- Note 3: The fluctuation range of full load efficiency(% ,TYP) in table is ±2%, full load efficiency= output power/module's input power.
- Note 4: "*" are models being developing.
- Note 5: Due to limited space, the above is only a partial product list. If you need products other than the list, please contact our sales department.

Input Specifications

Item	Operating Condition	Min	Typ.	Max	Unit
Input Voltage Range	AC input	85	220	265	VAC
	DC input	120	310	380	VDC
Input Frequency range	-	47	50	63	Hz
Input Current	115VAC	/	/	0.06	A

Surge Current	220VAC	/	/	0.04	
	115VAC	/	/	10	
	220VAC	/	/	20	
Leakage Current	-	0.5mA TYP/230VAC/50Hz			
External Fuse Recommended	-	1A/250VAC slow fusing			
Hot Plug	-	unavailable			
Remote Control Terminal	-	unavailable			

Output Specifications

Item	Operating Condition	Min	Typ.	Max	Unit	
Voltage Accuracy	Full input voltage range, any load	-	±2.0	±3.0	%	
Line Regulation	Nominal load	-	-	±0.5	%	
Load Regulation	Nominal input voltage, 20%~100% load	-	-	±1.0	%	
No Load Consumption	Input 115VAC	-	0.15	0.20	W	
	Input 220VAC	-				
Minimum Load	Single Output	0	-	-	%	
Start up Delay Time	Nominal input voltage (full load)	-	200	-	mS	
Power-off Holding Time	Input 220VAC (full load)	-	100	-	mS	
Dynamic Response	Overshoot range	25%~50%~25%	-5.0	-	+5.0	%
	Recovery time	50%~75%~50%	-5.0	-	+5.0	mS
Output Overshoot	Full input voltage range	≤10%Vo			%	
Short circuit Protection		Continuous, self-recovery			Hiccup	
Temperature Drift	-	-	±0.03%	-	%/°C	
Over Current Protection	Input 220VAC	≥120% Io self-recovery			Hiccup	

General Specifications



Item	Operating Condition	Min	Typ.	Max	Unit
Switching Frequency	-	-	65	-	KHz
Operating Temperature	-	-40	-	+75	°C
Storage Temperature	-	-40	-	+85	
Soldering Temperature	Wave soldering	260±4°C, time 5-10S			
	Manual soldering	360±8°C, time 4-7S			
Relative Humidity	-	10	-	90	%RH
Isolation Voltage	Input-Output, Test 1min,	3000	-	-	VAC

	leakage current≤5mA				
Insulation Resistance	Input-Output@ DC500V	100	-	-	MΩ
Safety Standard	-	EN62368, IEC62368			
Vibration	-	10-55Hz, 10G, 30Min, along X, Y, Z			
Safety Class	-	CLASS II			
Class of Case Material	-	UL94V-0			
MTBF	-	MIL-HDBK-217F@25°C > 300,000H			

EMC Characteristics

Total Item		Sub Item	Test Standard	Class
EMC	EMI	CE	CISPR22/EN55032	CLASS B (see recommended circuit Photo 2)
		RE	CISPR22/EN55032	CLASS B (see recommended circuit Photo 2)
	EMS	RS	IEC/EN61000-4-3	10V/m Perf.Criteria B
		CS	IEC/EN61000-4-6	3Vr.m.s Perf.Criteria B
		ESD	IEC/EN61000-4-2	Contact ±6KV / Air ±8KV Perf.Criteria B
		Surge	IEC/EN61000-4-5	±2KV Perf.Criteria B
		EFT	IEC/EN61000-4-4	±2KV Perf.Criteria B
		Voltage dips, short interruptions and voltage variations immunity	IEC/EN61000-4-11	0%~70% Perf.Criteria B

Packing Dimension

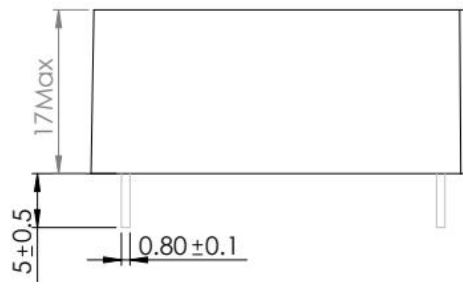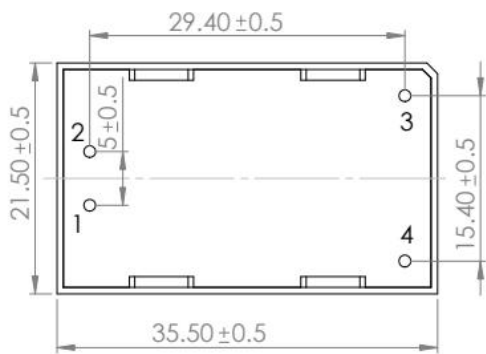

Note:
Unit:mm
Pin tolerance: ±1.0mm

The device layout is for reference only, Detailed information is in accordance with the final product.

Packing Code	L x W x H	
-	35.5 X 21.5 X 17.0mm	1.398 X 0.846 X 0.669inch

Pin Specification


Pin	1	2	3	4
Single(S)	AC(N)	AC(L)	+Vo	-Vo

Ripple & Noise Test: (Twisted Pair Method 20MHZ bandwidth)

Test Method:


(1) 12# twisted pair to connect, Oscilloscope bandwidth set as 20MHz, 100M bandwidth probe, terminated with 0.1uF polypropylene capacitor and 10uF high frequency low resistance electrolytic capacitor in parallel, oscilloscope set as Sample pattern.

(2) Input terminal connect to power supply, output terminal connect to electronic load through jig plate, Use 30cm±2 cm sampling line, Power line selected from corresponding diameter wire with insulation according to the flow of output current.

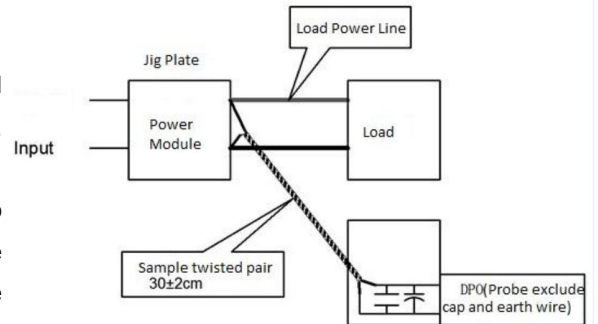


Product Characteristic Curve

Input Voltage Derating Curve

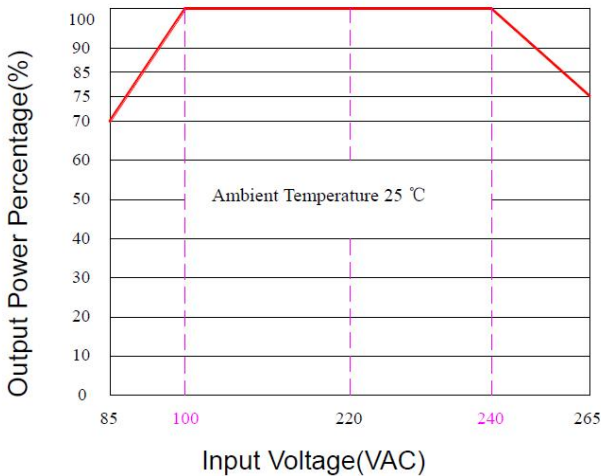

Temperature Derating Curve

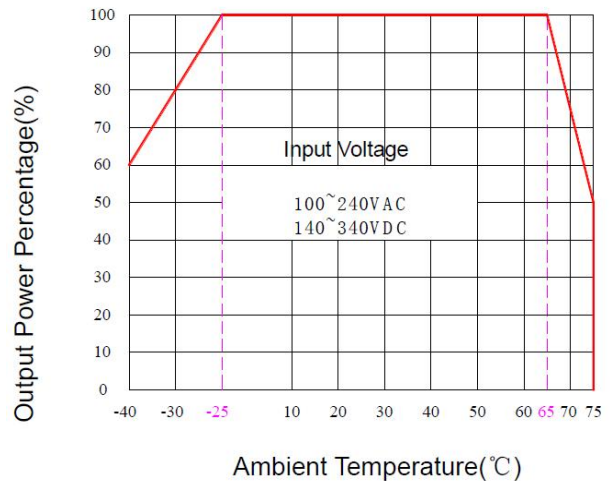

Note 1: Input Voltage should be derated base on Input Voltage Derating Curve when it is 85~100VAC/ 240~265VAC/ 120~140VDC/ 340~380VDC.

Note 2: Our product is suitable to use under natural air cooling environment, if use it under closed condition, please contact with us.

Typical Application Circuit & EMC Recommended Parameter

1. Typical Application Circuit:



Item	C1	C2	FUSE(necessary)	MOV	R1	TVS tube
FA3-220S05G2N3	330uF/10V	1uF/50V	1A/250V Slow Fusing	10D951K	2W/10Ω	SMBJ7.0A
FA3-220S12G2N3	220uF/16V				Wirewound	SMBJ20A
FA3-220S24G2N3	100uF/35V				resistor	SMBJ30A

Photo 1

Note:

The output filter capacitor C1 is an electrolytic capacitor. It is recommended to use high-frequency, low-resistance electrolytic capacitors. For capacity and flowing current, please refer to the technical specifications provided by each manufacturer.

C2 is a ceramic capacitor to remove high-frequency noise. The TVS tube protects the downstream circuit when the module is abnormal and is recommended to be used.

2. EMC Application Circuit:

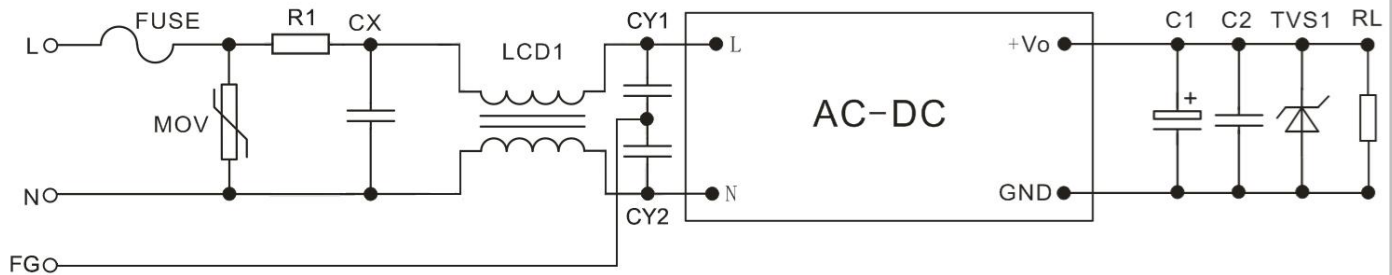


Photo 2

Component	Recommended Parameter	Component	Recommended Parameter
MOV	10D511K	R1	2W, 10Ω wirewound resistor
CX	0.1uF/275VAC	LCD1	UU9.8, 25mH
FUSE	1A/250V, Slow Fusing, must be connected externally	CY1,CY2	102M,400V

Note:

1. The product should be used within the specification range, or it will cause permanent damage to it;
2. The input terminal should connect to fuse;
3. If the product is worked under the minimum requested load, the product performance cannot be guaranteed to comply with all parameters in the datasheet;

4. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
5. Unless otherwise specified, parameters in this datasheet were measured under the conditions of **Ta=25°C**, **humidity<75%** with nominal input voltage and rated output load(pure resistance load);
6. All index testing methods in this datasheet are based on our Company's corporate standards;
7. The performance indexes of the product models listed in this manual are as above, but some indexes of non-standard model products will exceed the above-mentioned requirements, please directly contact our technician for specific information;
8. We can provide product customization service,
9. Specifications are subject to change without prior notice, please follow up with our website for newest manual.

Guangzhou Aipu Electron Technology Co., Ltd

Address: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, China.

Tel: 86-20-84206763 Fax: 86-20-84206762 HOTLINE: 400-889-8821

E-mail: sales@aipu-elec.com Website: www.aipupower.com