

Typical Features

- ◆ Wide input voltage range 85-900VAC
- ◆ No load power consumption ≤1W
- ◆ Transfer efficiency 88%(typical)
- ◆ Switching frequency 65KHz
- ◆ Protections: short circuit, over current, over voltage protection
- ◆ Isolation Voltage 4000Vac
- ◆ Industrial grade operating temperature: -25~+70°C
- ◆ Designed specifically for coal mine electrical equipment



Application Field

FA120-600SXXG9N4 series ----- is a special high-voltage power supply designed and developed by Aipu for coal mine electrical customers, with the development requirements of equipment power supply safety, convenient installation, reliable application, and technological innovation. This series of power supplies has the advantages of global input voltage range, low ripple, low temperature rise, low power consumption, high efficiency, high reliability, and high safety isolation. This series of products can be widely used in coal mine monitoring and security industries. When the product is used in an environment with relatively harsh electromagnetic compatibility, please refer to the application circuit provided by our company.

Typical Product List

Certificate	Part No.	Output Specification			Max. Capacitive Load	Ripple & Noise 20MHz(Max)	Efficiency @full load 380Vac (TYP)
		Power	Voltage	Current			
		(W)	Vo(V)	Io(m A)			
/	FA120-600S24G9N4	120	24	5000	1500	200	89
	FA120-600S28G9N4	120	28	4286	1000	200	89
	FA120-600S35G9N4	120	35	3429	1000	200	90

Note 1: The typical value of output efficiency is based on the product being aged at full load for half an hour.
 Note 2: The full load efficiency (% , TYP) in the table fluctuates by ±2%. The full load output efficiency is equal to the total output power divided by the input power of the power module.
 Note 3: The ripple and noise test method uses the twisted pair test method. For specific test methods and matching, please refer to the following (Ripple & Noise Test Instructions).
 Note 4: Due to limited space, the above is only a partial product list. If you need products outside the list, please contact our sales department.

Input Specifications

Items	Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	AC input	85	330	900	VAC
Input Current	127VAC	-	-	2.5	A
	330VAC	-	-	1.5	
	660VAC	-	-	0.8	

Surge Current	330VAC	-	-	140	A
	660VAC	-	-	280	
	900VAC	-	-	360	
Recommended External Input Fuse	-	6A/1000VAC, necessary			
Hot Plug	-	Unavailable			

Output Specifications

Items	Operating Conditions		Min.	Typ.	Max.	Unit
Voltage Accuracy	Full input voltage range, any load	Vo	-	±2	-	%
Line Regulation	Nominal load	Vo	-	±0.5	-	%
Load Regulation	Nominal input voltage, 10%~100% load	Vo	-	±1	-	%
No Load Power Consumption	Input 900VAC		-	-	1	W
Ripple & Noise	20MHz bandwidth (peak to peak)		-	100	200	mV
Drift Coefficient	-		-	±0.02%	-	%/°C
Output Overshoot	Full input voltage range		≤10%Vo			%
Short-Circuit Protection			Self-recovery after short circuit is eliminated			Hiccup
Over-current Protection			Input nominal voltage ≥110% Io self-recovery			
Over-voltage Protection	Output 24VDC		≤35			VDC
	Output 28VDC		≤40			
	Output 35VDC		≤45			
Minimum Load	Single Output		0	-	-	%
Start-up Delay Time	Input 330VAC(full load)		-	3000	-	mS
Power-off Holding Time	Input 330VAC(full load)		-	40	-	mS
	Input 660VAC(full load)		-	80	-	
Dynamic Response	Overshoot range	25%~50%~25%	-5.0	-	+5.0	%
	Recovery time	50%~75%~50%	-5.0	-	+5.0	mS

General Specifications

Items	Operating Conditions		Min.	Typ.	Max.	Unit
Switching Frequency	-		-	65	-	KHz
Operating Temperature	-		-25	-	+70	°C

	The temperature derating needs to be performed based on the temperature derating curve. The derating curve can be found in the following (product characteristic curve).			
Storage Temperature	-	-40	-	+85
Soldering Temperature	Wave soldering	260±4℃, timing 5-10S		
	Manual soldering	360±8℃, timing 4-7S		
Storage Humidity	-	-	-	95 %RH
Isolation Voltage	Input-Output, test 1min, leakage current≤3mA	4000	-	- VAC
Insulation Resistance	Input-Output@DC500V	50	-	- MΩ
MTBF	-	MIL-HDBK-217F@25℃ > 300,000H		


Physical Characteristics

Case Material	Metal		
Dimension	Horizontal packaging	170.0X107.0X52.0mm	
Weight		530g (TYP)	
Cooling Method	Natural air cooling		

Electromagnetic Compatibility(EMC) Characteristics

Total Items	Sub Items	Standard	Class
EMS	RS	IEC/EN61000-4-3	10V/m Perf.Criteria A
	CS	IEC/EN61000-4-6	10Vr.m.s Perf.Criteria A
	ESD	IEC/EN61000-4-2	Contact ±6KV Perf.Criteria B
	Surge	IEC/EN61000-4-5	Line to line ±2KV line to ground ±4KV Perf.Criteria B
	EFT	IEC/EN61000-4-4	±4KV Perf.Criteria B

Packing Dimension

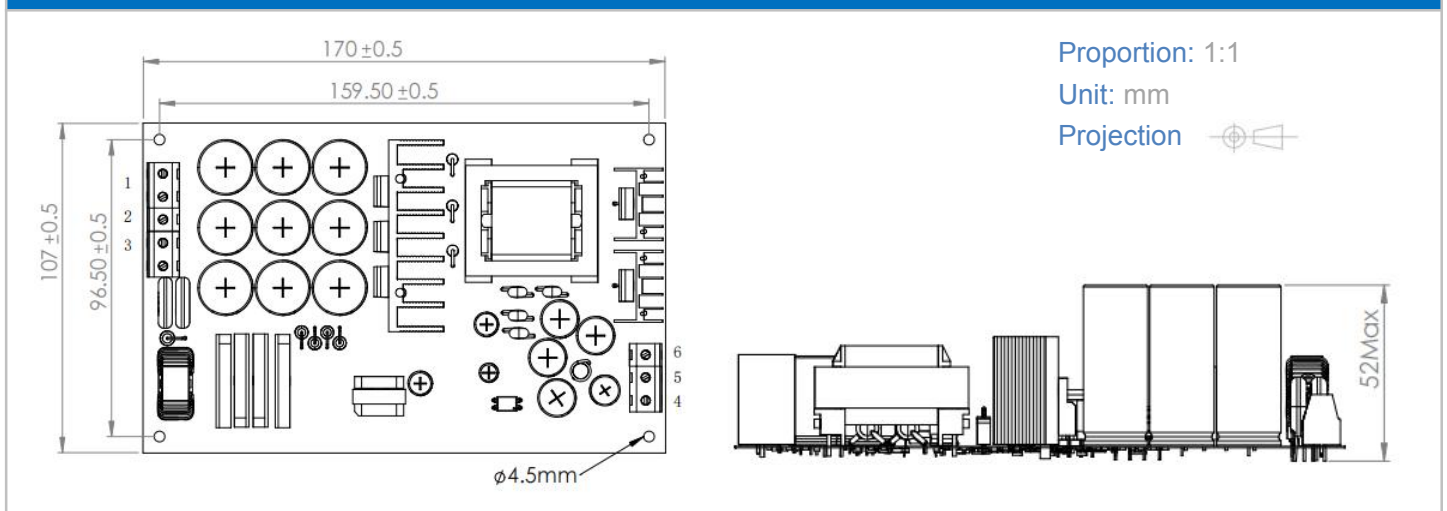

Packing Code	L x W x H	
G9	170.0X107.0X52.0mm	6.693X4.213X2.047inch

Pin Definition


Pin-out	1	2	3	4	5	6
Single(S)	PE	AC (L)	AC (N)	Trim	-Vo	+Vo

Ripple & Noise Test: (Twisted Pair Method 20MHZ bandwidth)



Test Method:

(1) 12# twisted pair to connect, Oscilloscope bandwidth set as 20MHz, 100M bandwidth probe, terminated with 0.1uF polypropylene capacitor and 10uF high frequency low resistance electrolytic capacitor in parallel, oscilloscope set as Sample pattern.

(2) Input terminal connect to power supply, output terminal connect to electronic load through jig plate, Use 30cm±2 cm sampling line, Power line selected from corresponding diameter wire with insulation according to the flow of output current.

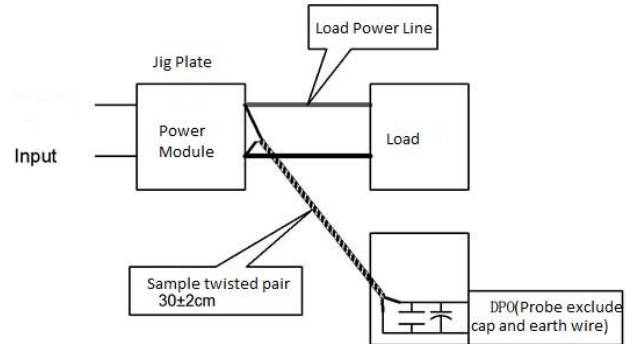


Product Characteristic Curve

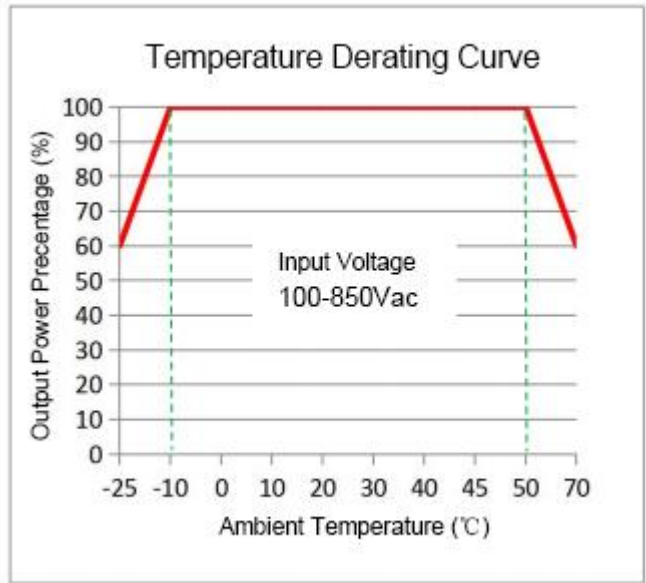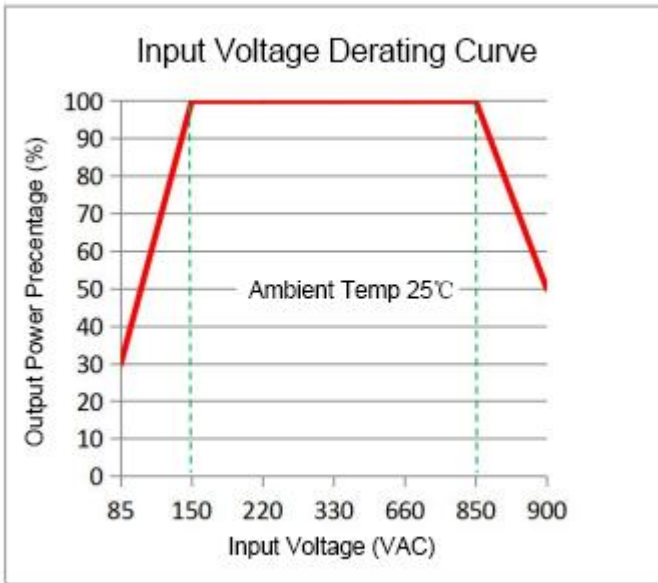

Note

- 1: Input Voltage should be derated base on Input Voltage Derating Curve when it is 85~100VAC/850~900VAC.
- 2: Our product is suitable to use under natural air cooling environment, if use it under closed condition, please contact with us.

Use of Trim & Calculation of Trim Resistance

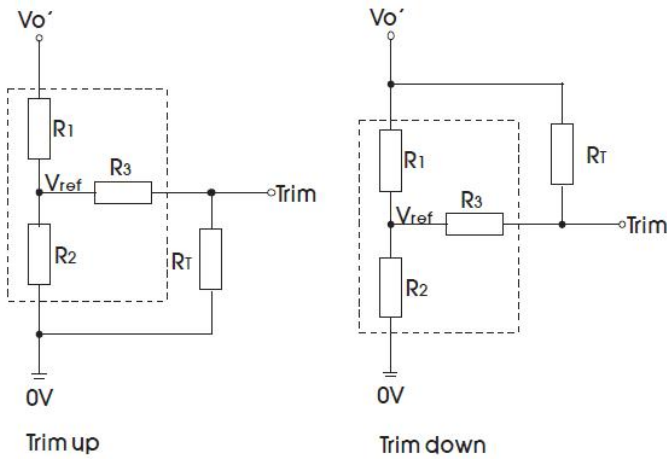

Calculation of Trim Resistance:

$$\text{up: } R_T = \frac{\alpha R_2}{R_2 - \alpha} - R_3 \qquad \alpha = \frac{V_{ref}}{V_{o'} - V_{ref}} \cdot R_1$$


$$\text{down: } R_T = \frac{\alpha R_1}{R_1 - \alpha} - R_3 \qquad \alpha = \frac{V_{o'} - V_{ref}}{V_{ref}} \cdot R_2$$

R_T is the Trim resistor
 α is a custom parameter with no actual meaning
 $V_{o'}$ is the actual required voltage increase or decrease

Vout (VDC)	R1 (KΩ)	R2 (KΩ)	R3 (KΩ)	Vref (V)
24	13.64	1.57	1	2.5
28	16.35	1.59	1	2.5
35	19.82	1.50	1	2.5

Design Reference Applications

1. Typical Application Circuit

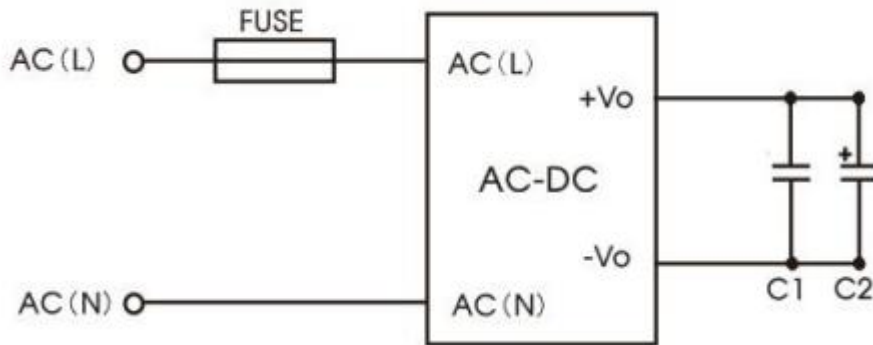

Recommended Circuit 1

Component Code	Component	Recommended Value
FUSE	Fuse	6A/1000VAC, necessary
C1	High frequency electrolytic capacitors	1uF/50V
C2	Ceramic capacitors	10uF/50V

Note:

1. The product should be used within the specification range, otherwise it will cause permanent damage to the product;
2. The product input terminal must be connected to a fuse;
3. If the product works below the minimum required load, it cannot be guaranteed that the product performance meets all the performance indicators in this manual;
4. If the product works beyond the product load range, it cannot be guaranteed that the product performance meets all the performance indicators in this manual;
5. Unless otherwise specified, the above data are measured at Ta=25°C, humidity<75%, input nominal voltage and output rated load (pure resistance load);
6. All the above index test methods are based on our company's standards;
7. The above are the performance indicators of the product models listed in this manual. Some indicators of non-standard model products will exceed the above requirements. For specific circumstances, please contact our technical personnel directly
8. Our company can provide product customization;
9. Product specifications are subject to change without prior notice. Please pay attention to the latest manual published on our official website.

Guangzhou Aipu Electron Technology Co., Ltd

Address: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, China.

Tel: 86-20-84206763 Fax: 86-20-84206762 HOTLINE: 400-889-8821

E-mail: sales@aipu-elec.com Website: <https://www.aipupower.com>