

Typical Features

- ◆ Wide input voltage range:85-305VAC/120-430VDC
- ◆ No-load power consumption≤0.25W
- ◆ Transfer efficiency (typ. 84%)
- ◆ Switching frequency: 65KHz
- ◆ Protection: Short Circuit, Over Current, Over Voltage, Over Temperature
- ◆ Isolation voltage: 4200Vac
- ◆ Meet IEC60950/UL60950/EN60950 test Standard
- ◆ Plastic case, meets flammability UL94 V-0
- ◆ PCB mounting, Chassis mounting, Din-rail mounting available



Application Field

FA20-220SXXF2N5 (-T)(-TS) Series----- a compact size, high efficient power converter offered by Aipu. It features universal input voltage, DC and AC dual-use, low ripple, low temperature rise, low power consumption, high efficiency, high reliability, safer isolation, with good EMC performance. EMC and Safety standard meet international EN55032,IEC/EN61000. It widely used in power, industrial, instrument, smart home applications. For harsh EMC environment, the application circuit in the datasheet is strongly recommended.

Typical Product List

Certificate	Part No.	Output Specification			Max. Capacitive Load	Ripple& Noise 20MHz (MAX)	Efficiency@ Full Load 220Vac (Typical)
		Power	Voltage	Current			
		(W)	Vo (V)	Io (mA)			
-	*FA20-220S05F2N5	20	5	4000	4000	100	77
	*FA20-220S09F2N5	20	9	2222	3000	120	82
	FA20-220S12F2N5	20	12	1667	2000	120	83
	*FA20-220S15F2N5	20	15	1333	2000	120	83
	*FA20-220S24F2N5	20	24	833	800	150	84

- Note 1: Suffix "-T"for chassis mounting, "-TS" for DIN-Rail mounting, Rail width is: 35mm;
- Note 2: "*" is model under developing.
- Note 3: The typical output efficiency is based on that product is full loaded and burned-in after half an hour.
- Note 4: The fluctuation range of full load efficiency(% ,TYP) is ±2%, full load output efficiency= total output power/module's input power.

Input Specification

Item	Operating Condition	Min.	Typ.	Max.	Unit
Input Voltage Range	AC Input	85	220	305	VAC
	DC Input	120	310	430	VDC
Input Frequency Range	-	47	50	63	Hz

Input Current	115VAC	/	/	0.4	A
	220VAC	/	/	0.25	
Surge Current	115VAC	/	/	12	
	220VAC	/	/	20	
Leakage Current	-	0.5mA TYP/230VAC/50Hz			
External fuse recommended value	-	3.15A/300VAC slow-fusing			
Hot plug	-	Unavailable			
Remote control terminal	-	Unavailable			

Output Specification

Item	Operating Condition		Min.	Typ.	Max.	Unit
Voltage Accuracy	Full input voltage range	Vo	-	±2.0	±3.0	%
	Any load					
Line Regulation	Nominal Load	Vo	-	-	±0.5	%
Load Regulation	Nominal input Voltage	Vo	-	-	±1.0	%
	20%~100% load					
No load power consumption	Input 115VAC		-	-	0.25	W
	Input 220VAC		-	-		
Minimum load	Single Output		10	-	-	%
Turn-on Delay Time	Nominal input voltage, full load		-	1500	-	mS
Power-off Holding Time	Input 115VAC (full load)		-	50	-	mS
	Input 220VAC (full load)		-	150	-	
dynamic response	Overshoot amplitude	25%~50%~25%	-10	-	+10	%
	Recovery time	50%~75%~50%	-	5.0	-	mS
Output Overshoot	Full input voltage range		≤10%Vo			%
Short Circuit Protection			Continuous, Self-recovery			Hiccup
Drift Coefficient	-		-	±0.03%	-	%/°C
Over Current Protection	Input 220VAC		≥120% Io, Self-recovery			Hiccup
Over Voltage Protection	Output 5.0VDC		≤7.5			VDC
	Output 9VDC		≤13.5			
	Output 12VDC		≤18			
	Output 15VDC		≤20			
	Output 24VDC		≤30			


General Specifications

Item	Operating Condition	Min.	Typ.	Max.	Unit
Switching Frequency	-	-	65	-	KHz
Operating Temperature	-	-40	-	+85	°C
Storage Temperature	-	-40	-	+105	
Soldering Temperature	Wave-soldering	260±4°C,timing 5-10S			
	Manual-soldering	360±8°C,timing 4-7S			
Relative Humidity	-	10	-	90	%RH
Isolation Voltage	Input-Output, Test 1min, leakage current ≤5mA	4200	-	-	VAC
Insulation Resistance	Input-Output@DC500V	100	-	-	MΩ
Safety Standard	-	EN60950、IEC60950			
Vibration	-	10-55Hz,10G,30Min,along X,Y,Z			
Safety Class	-	CLASS II			
Class of Case Material	-	UL94 V-0			
MTBF	-	MIL-HDBK-217F@25°C > 300,000H			



EMC Characteristics

Total Item	Sub Item	Test Standard	Class
EMC	EMI	CE	CISPR22/EN55032 CLASS B (Recommended circuit 2)
		RE	CISPR22/EN55032 CLASS B (Recommended circuit 2)
	EMS	RS	IEC/EN61000-4-3 10V/m Perf.Criteria B (Recommended circuit 2)
		CS	IEC/EN61000-4-6 3Vr.m.s Perf.Criteria B (Recommended circuit 2)
		ESD	IEC/EN61000-4-2 Contact ±6KV / Air ±8KV Perf.Criteria B
		Surge	IEC/EN61000-4-5 line to line ±2KV / line to ground ±4KV Perf.Criteria B (Recommended circuit 2)
		EFT	IEC/EN61000-4-4 ±2KV Perf.Criteria B
		Voltage dips, short interruptions and voltage variations immunity	IEC/EN61000-4-11 0%~70% Perf.Criteria B

F2 Packing Dimension


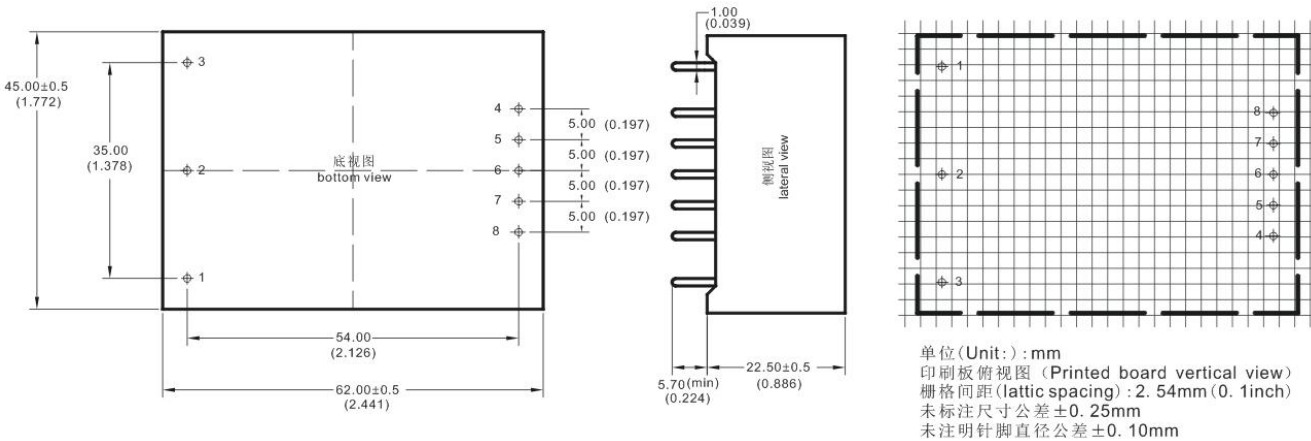


F2-T Packing Dimension

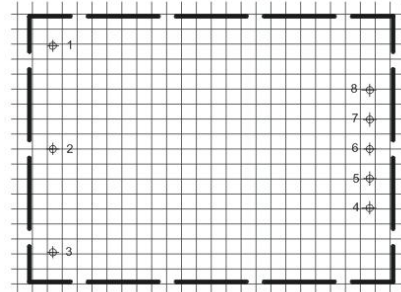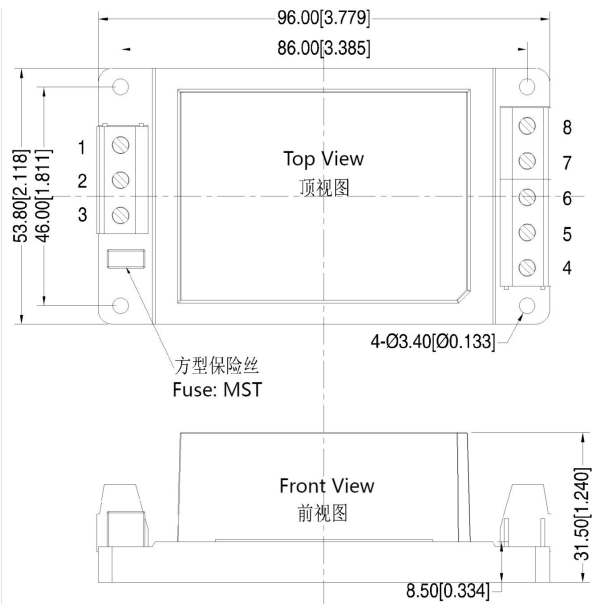

单位(Unit): mm
印刷板俯视图 (Printed board vertical view)
栅格间距 (lattice spacing) : 2.54mm (0.1inch)
未标注尺寸公差±0.50mm
未注明引脚直径公差±0.10mm

F2-TS Packing Dimension

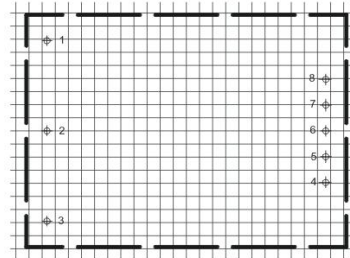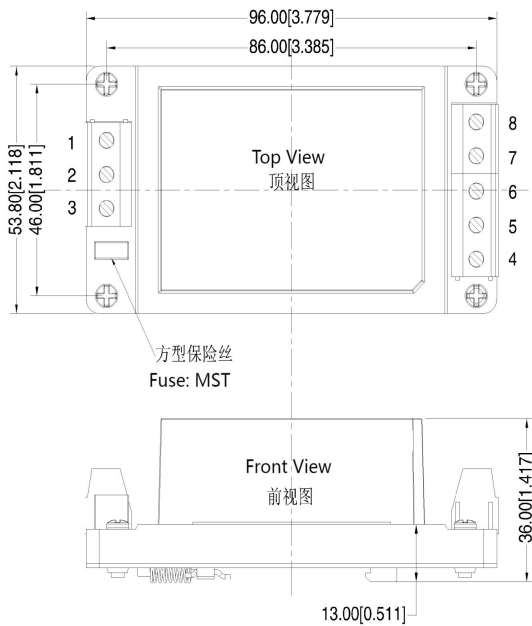

单位(Unit): mm
印刷板俯视图 (Printed board vertical view)
栅格间距 (lattice spacing) : 2.54mm (0.1inch)
未标注尺寸公差±0.50mm
未注明引脚直径公差±0.10mm

Package Code	L x W x H	
F2	62.0 x 45.0 x 22.5 mm	2.441 x 1.772 x 0.885inch
F2-T	96.0 x 53.8 x 31.5 mm	3.780 x 2.118 x 1.240inch
F2-TS	96.0 x 53.8 x 36.0 mm	3.780 x 2.118 x 1.417inch

Pin Definition

Pin-out	1	2	3	4	8
Single (S)	FG	AC(N)	AC(L)	+Vo	-Vo


Note: If the definition of pin is not in accordance with the model selection manual, please refer to the label on actual item.

Ripple & Noise Test: (Twisted Pair Method 20MHZ bandwidth)



Test Method:

(1) 12# twisted pair to connect, Oscilloscope bandwidth set as 20MHz, 100M bandwidth probe, terminated with 0.1uF polypropylene capacitor and 10uF high frequency low resistance electrolytic capacitor in parallel, oscilloscope set as Sample pattern.

(2) Input terminal connect to power supply, output terminal connect to electronic load through jig plate, Use 30cm±2 cm sampling line. Power line selected from corresponding diameter wire with insulation according to the flow of output current.

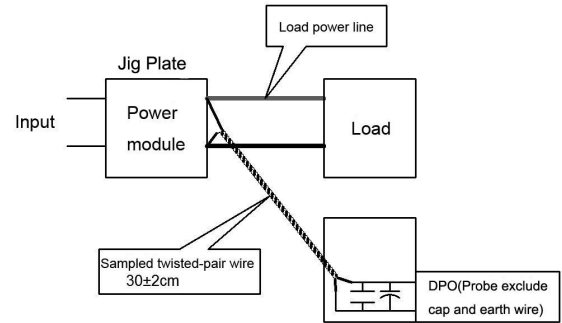

Product Characteristic Curve

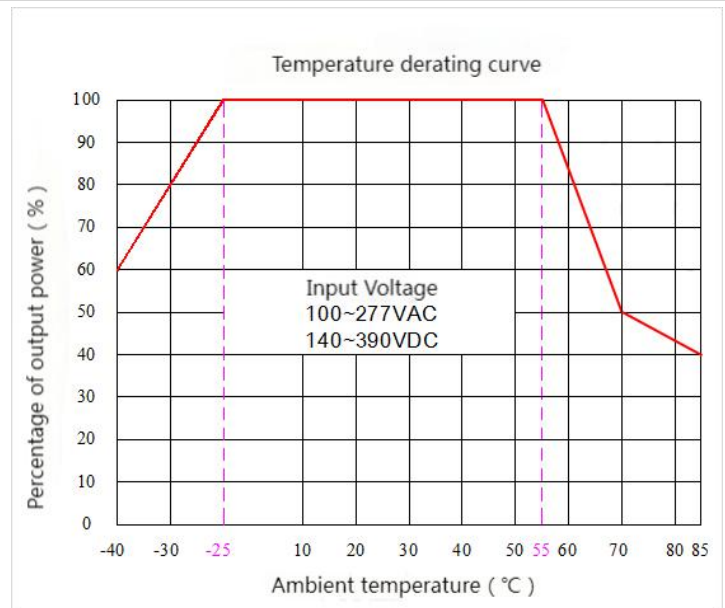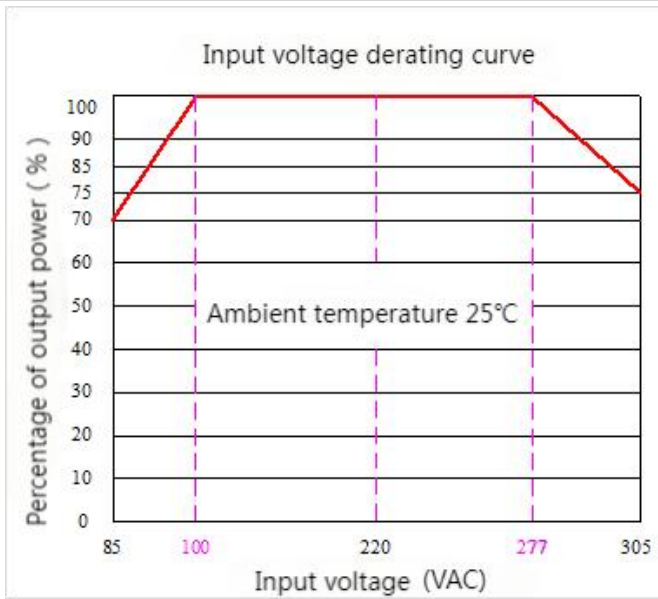


Note

- 1: Input Voltage should be derated base on Input Voltage Derating Curve when it is 85~100VAC/277~305VAC/120~140VDC/390~430VDC.
- 2: Our product is suitable to use under natural air cooling environment, if use it under closed condition, please contact with us.

Typical EMC Circuit and Recommended Spec

1. Typical Application Circuit

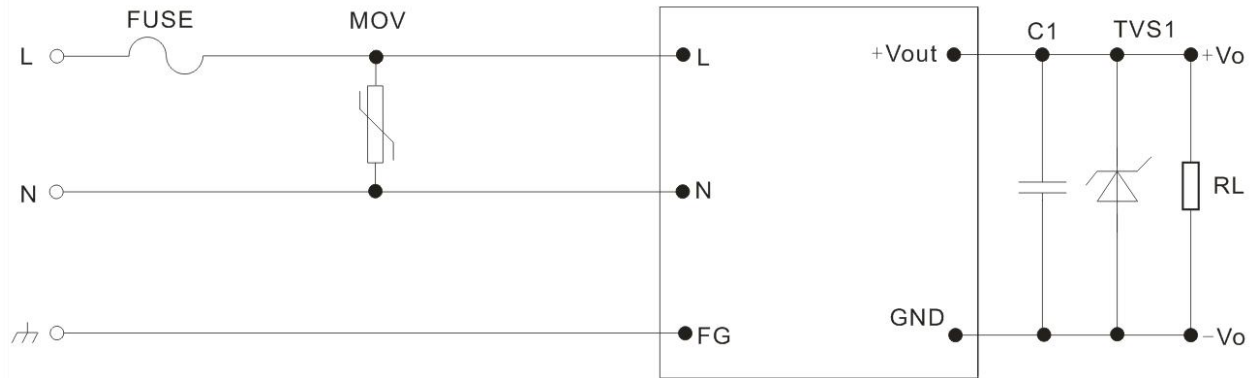


Recommended circuit 1

Part No.	FUSE	C1	C2	TVS1
FA20-220S05F2N5	3.15A/300V,Slo w melting	1uF/50V, Ceramic capacitors	680uF/25V	SMBJ7.0A
FA20-220S09F2N5			470uF/25V	SMBJ12A
FA20-220S12F2N5			220uF/25V	SMBJ20A
FA20-220S15F2N5			220uF/25V	SMBJ20A
FA20-220S24F2N5			68uF/35V	SMBJ30A

Note:

Output capacitor C1 is ceramic capacitor, to filter high frequency noise. TVS tube is a recommend component to protect post-circuit if converter fails. Recommend to external FUSE, Model:2A/250V, slow fusing. Recommend to external MOV voltage dependent resistor, model:14D511K.

2.EMC solution recommended circuit

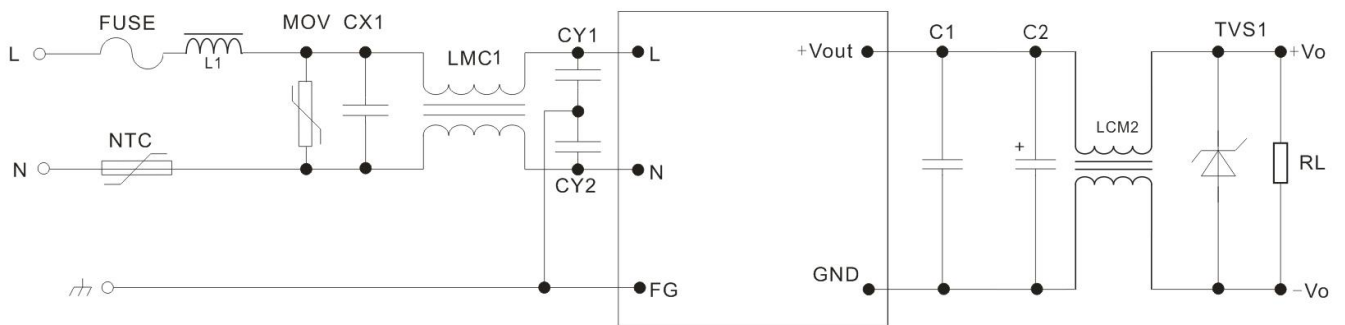

Component	Recommended Value	Component	Recommended Value
MOV	20D561K	NTC	10D-11
CX1	0.22uF/310VAC	LMC 1	UU9.8,25mH
FUSE	3.15A/300V, slow-fusing, necessary	LMC 2	150uH±20%
CY1、CY2	1nF/400VAC	L1	330uH±10%

Note :

- 1.The product should be used under the specification range, otherwise it will cause permanent damage to it.
- 2.Product's input terminal should connect to fuse;
- 3.If the product is not worked under the load range (below the minimum load or beyond the load range), we cannot ensure that the performance of product is in accordance with all the indexes in this manual;
- 4.Unless otherwise specified, data in this datasheet are tested under conditions of **Ta=25°C**, **humidity<75%** when inputting nominal voltage and outputting rated load (pure resistance load);
- 5.All index testing methods in this datasheet are based on our Company's corporate standards
- 6.The performance indexes of the product models listed in this manual are as above, but some indexes of non-standard model products will exceed the above-mentioned requirements, please directly contact our technician for specific information;
- 7.We can provide customized product service;
- 8.The product specification may be changed at any time without prior notice.

Guangzhou Aipu Electron Technology Co., Ltd

Address: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, China.

Tel: 86-20-84206763 Fax: 86-20-84206762 HOTLINE: 400-889-8821

E-mail: sales@aipu-elec.com Website: www.aipupower.com