

Typical Features

- ◆ Wide input voltage range 85-305VAC/120-430VDC
- ◆ No load power consumption ≤ 0.3W
- ◆ Transfer efficiency 88%(typical)
- ◆ Switching frequency 75KHz
- ◆ Protections: short circuit, over current protection
- ◆ Isolation Voltage 4200Vac
- ◆ Conform to IEC62368/UL62368/EN62368 test standard
- ◆ Conform to CE, RoHS Certificate



Application Field

FA40-220SXXG2D5 Series-----is a small size, high efficiency module power supply provided by Aipu to customers. This series of power supplies has the advantages of global input voltage range, AC/DC dual use, low ripple, low temperature rise, low power consumption, high efficiency, high reliability, high safety isolation, and good EMC performance. EMC and safety specifications meet the international EN55032 and IEC/EN61000 standards. This series of products are widely used in many fields such as power, industry, instrumentation and smart home. When the product is used in an environment with relatively harsh electromagnetic compatibility, please refer to the application circuit provided by our company.

Typical Product List

C er tifi ca te	Part No.	Output Specification			Max. Capacitiv e Load	Ripple & Noise 20MHz(Max)	Efficiency @full load 220Vac (TYP)
		Power	Voltage	Current			
		(W)	Vo1(V)	Io1(m A)			
/	FA40-220S05G2D5	40	5	8000	7000	100	85
	FA40-220S12G2D5	40	12	3333	6000	120	88
	FA40-220S15G2D5	40	15	2667	5000	120	88
	FA40-220S24G2D5	40	24	1667	800	150	88

Note 1: The typical value of output efficiency is based on the product being aged for half an hour at full load.

Note 2: The full load efficiency (% , TYP) in the table fluctuates by ±2%. The full load efficiency is the total output power divided by the input power of the module.

Note 3: The ripple and noise test method uses the twisted pair test method. For specific test methods and matching, please refer to the following (Ripple & Noise Test Instructions).

Note 4: Due to limited space, the above is only a partial product list. If you need products outside the list, please contact our sales department.

Input Specifications

Items	Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	AC input	85	220	305	VAC
	DC input	100	310	430	VDC
Input Frequency Range	-	47	50	63	Hz

Input Current	115VAC	/	/	0.70	A
	220VAC	/	/	0.35	
Surge Current	115VAC	/	/	10	
	220VAC	/	/	20	
Leakage Current	-	0.5mA TYP/230VAC/50Hz			
Recommended External Input Fuse	-	3.15A/250VAC, slow-fusing			
Hot Plug	-	Unavailable			
Remote Control Terminal	-	Unavailable			

Output Specifications						
Items		Operating Conditions	Min.	Typ.	Max.	Unit
Voltage Accuracy		Full input voltage range, any load	-	±2.0	±3.0	%
Line Regulation		Nominal load	-	-	±0.5	%
Load Regulation		Nominal input voltage, 20%~100% load	-	-	±1.0	%
No Load Power Consumption		Input 115VAC	-	-	0.30	W
		Input 220VAC	-	-		
Minimum Load		Single Output	0	-	-	%
Start-up Delay Time		Nominal input voltage (full load)	-	1000	-	mS
Power-off Holding Time		Input 115VAC(full load)	-	200	-	mS
		Input 220VAC(full load)	--	100	-	
Dynamic Response	Overshoot range	25%~50%~25% 50%~75%~50%	- 5.0	-	+ 5.0	%
	Recovery time		-	-	5.0	mS
Output Overshoot		Full input voltage range	≤10%Vo			%
Short-Circuit Protection			Continuous, Self-recovery			Hiccup
Drift Coefficient		-	-	±0.03%	-	%/°C
Over-current Protection		Full input voltage range	≥120% Io self-recovery			Hiccup
Over-voltage Protection		Output 5VDC	≤7.5VDC			Hiccup
		Output 12VDC	≤18VDC			
		Output 15VDC	≤20VDC			
		Output 24VDC	≤30VDC			


General Specifications

Items	Operating Conditions	Min.	Typ.	Max.	Unit
Switching Frequency	-	-	65	-	KHz
Operating Temperature	-	-40	-	+105	°C
Storage Temperature	-	-40	-	+110	
Soldering Temperature	Wave soldering	260±4°C, timing 5-10S			
	Manual soldering	360±8°C, timing 4-7S			
Relative Humidity	-	10	-	90	%RH
Isolation Voltage	Input-Output, test 1min, leakage current≤5mA	4200	-	-	VAC
Insulation Resistance	Input-Output@DC500V	100	-	-	MΩ
Safety Standard	-	EN62368、IEC62368			
Vibration	-	10-55Hz, 10G, 30Min, along X, Y, Z			
Safety Class	-	CLASS II			
Shell Class	-	-			
MTBF	-	MIL-HDBK-217F@25°C > 300,000H			
Cooling Method	-	Free air convection			

Electromagnetic Compatibility(EMC) Characteristics

Total Items	Sub Items	Standard	Class			
E M C	EMI	CE	CISPR22/EN55032	CLASS B (Recommended Circuit 2)		
		RE	CISPR22/EN55032	CLASS B (Recommended Circuit 2)		
	EMS	RS	IEC/EN61000-4-3	10V/m	Perf.Criteria B	(Recommended Circuit 2)
		CS	IEC/EN61000-4-6	3Vr.m.s	Perf.Criteria B	(Recommended Circuit 2)
		ESD	IEC/EN61000-4-2	Contact ±6KV / Air ±8KV Perf.Criteria B (see recommended circuit 2)		
		Surge	IEC/EN61000-4-5	±1KV	Perf.Criteria B	(Recommended Circuit 2)
		EFT	IEC/EN61000-4-4	±2KV	Perf.Criteria B	(Recommended Circuit 2)
		Voltage dips, short interruptions and voltage variations immunity	IEC/EN61000-4-11	0%~70%	Perf.Criteria B	

Packing Dimension

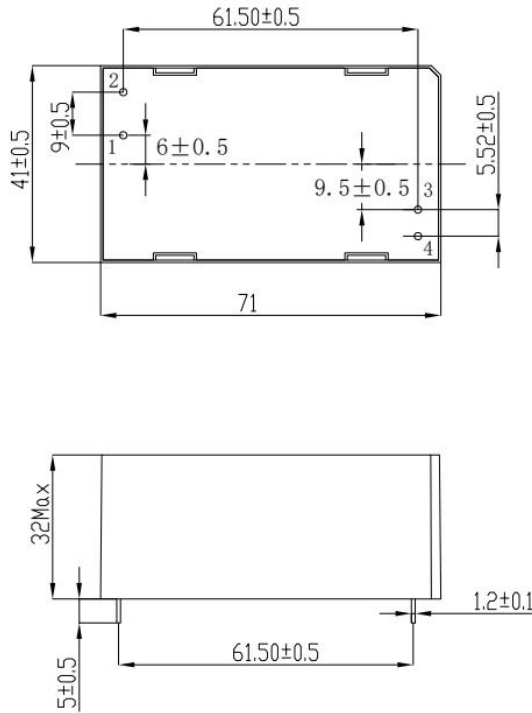

Note:
Unit: mm
Unmarked Tolerance ± 1.0
The layout is for reference only,
please refer to the actual product

Packing Code	L x W x H	
-	71.0 X 41.0 X 32.0mm	2.795 X 1.614 X 1.260inch


Pin Definition

Pin-out	1	2	3	4
Single(S)	AC(L)	AC(N)	-Vo	+Vo



Ripple & Noise Test: (Twisted Pair Method 20MHZ bandwidth)

Test Method:

(1) 12# twisted pair to connect, Oscilloscope bandwidth set as 20MHz, 100M bandwidth probe, terminated with 0.1uF polypropylene capacitor and 10uF high frequency low resistance electrolytic capacitor in parallel, oscilloscope set as Sample pattern.
(2) Input terminal connect to power supply, output terminal connect to electronic load through jig plate, Use 30cm±2 cm sampling line, Power line selected from corresponding diameter wire with insulation according to the flow of output current.

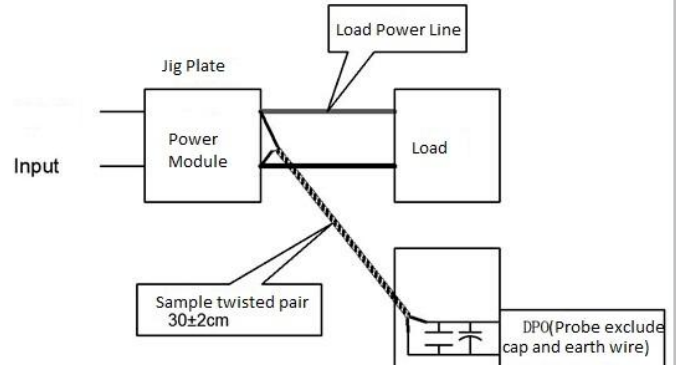

Product Characteristic Curve

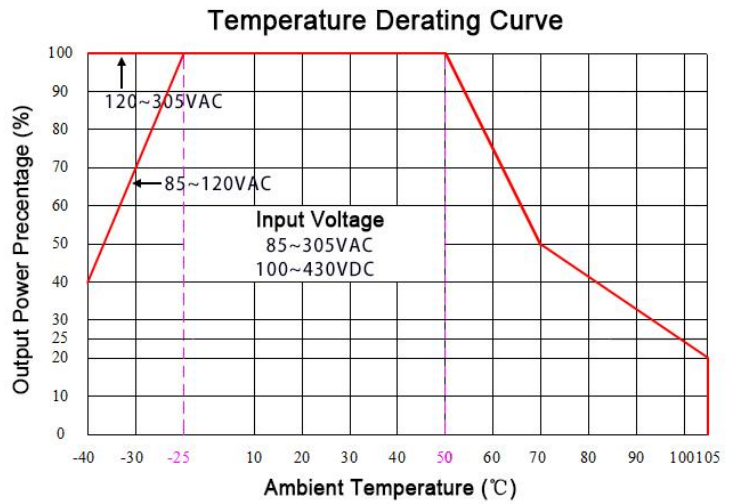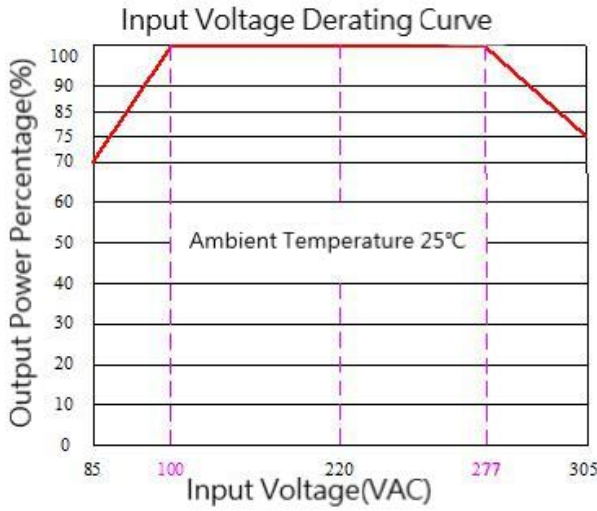


Note

- 1: Input Voltage should be derated base on Input Voltage Derating Curve when it is 85~100VAC/277~305VAC/120~140VDC/ 390~430VDC.
- 2: Our product is suitable to use under natural air cooling environment, if use it under closed condition, please contact with us.

Typical Application Circuit and EMC Recommended Parameters

1. Typical Application Circuit

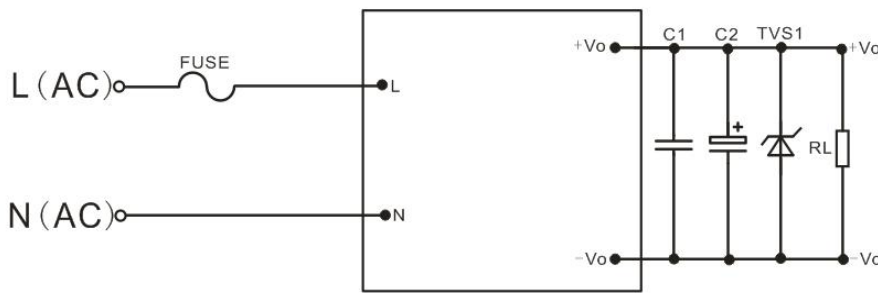


Recommended Circuit 1

Part No.	FUSE	C1	C2	TVS1
FA40-220S05G2D5	3.15A/300V, Slow Fusing	1uF/50V, Ceramic capacitors	330uF/16V	SMBJ7.0A
FA40-220S12G2D5			330uF/16V	SMBJ20A
FA40-220S15G2D5			220uF/25V	SMBJ20A
FA40-220S24G2D5			100uF/35V	SMBJ30A

Note 1:

Output filter capacitor C2 is an electrolytic capacitor. It is recommended to use a high-frequency, low-resistance electrolytic capacitor. For the capacity and current flowing through, please refer to the technical specifications provided by each manufacturer. The withstand voltage of C2 capacitor should be derated to at least 80%. C1 is a ceramic capacitor to remove high-frequency noise. It is recommended to use 0.1uF/50V/1206. TVS1 tube protects the subsequent circuit when the module is abnormal. It is recommended to use it. It is recommended to connect an external FUSE fuse, model: 3.15A/300V slow break.

2. EMC Recommended Circuit

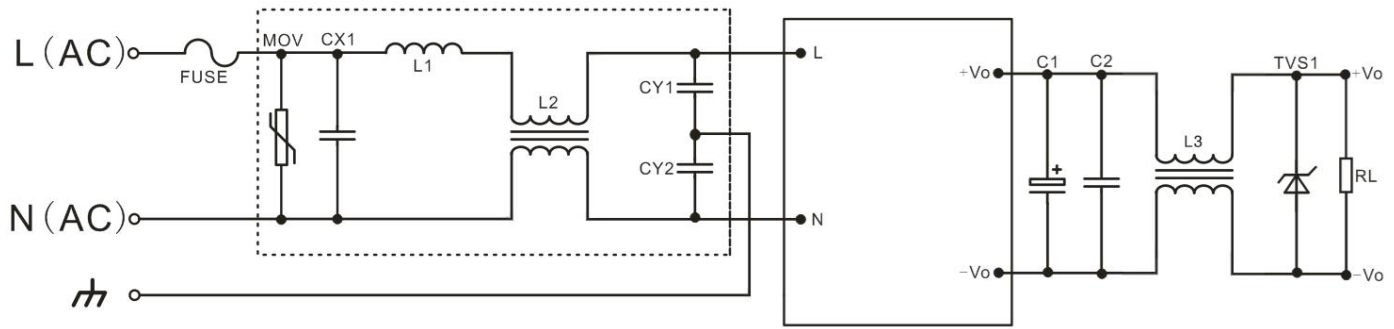

Recommended Circuit 2

Part No.	Recommended value
FUSE	3.15A/300VAC, slow fusing, necessary
MOV	14D561K
CX1	0.22uF/310VAC
L1	2.0uH/2.5A I-shaped inductor
L2	15mH/2.5A
L3	145uH/5A
CY1,CY2	102M-400VAC

- Note:
1. The product should be used within the specification range, otherwise it will cause permanent damage to the product;
 2. The product input terminal must be connected to a fuse;
 3. If the product works below the minimum required load, it cannot be guaranteed that the product performance meets all the performance indicators in this manual;
 4. If the product works beyond the product load range, it cannot be guaranteed that the product performance meets all the performance indicators in this manual;
 5. Unless otherwise specified, the above data are measured at Ta=25°C, humidity<75%, input nominal voltage and output rated load (pure resistance load);
 6. All the above index test methods are based on our company's standards;
 7. The above are the performance indicators of the product models listed in this manual. Some indicators of non-standard model products will exceed the above requirements. For specific circumstances, please contact our technical personnel directly
 8. Our company can provide product customization;
 9. Product specifications are subject to change without prior notice. Please pay attention to the latest manual published on our official website.

Guangzhou Aipu Electron Technology Co., Ltd

Address: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, China.
 Tel: 86-20-84206763 Fax: 86-20-84206762 HOTLINE: 400-889-8821
 E-mail: sales@aipu-elec.com Website: <https://www.aipupower.com>