

### Product Typical Features

- ◆ Wide input voltage range (4:1), Output Power 20W
- ◆ Transfer Efficiency up to 91%
- ◆ Stand-by Power Consumption as low as 0.1W
- ◆ Output fast start up
- ◆ Continuous Short Circuit protection, self-recovery
- ◆ Input under voltage, output over voltage, short circuit, over current protection
- ◆ Isolation Voltage 1500VDC
- ◆ Operating Temperature: -40°C~+85°C
- ◆ Good EMC performance
- ◆ International standard pin-out



### Application Field

**PFD20-XXSXXA3(C)2** is a newly designed DIP 1X1 packed 20W output power, ultra wide input range 4:1, low stand-by power consumption, isolated regulated output DC-DC converter, could be widely used for industrial control, instrument, communication, power electricity, internet of things field. For harsh EMC environment, the application circuit in the datasheet is strongly recommended.

### Typical Product List

Certificate	Part no.	Input Voltage Range (VDC)		Output Voltage/Current (Vo/Io)		Input Current (mA) (Nominal Voltage)		Max. Capacitive Load uF	Ripple & Noise		Efficiency (%)@output full load	
		Nominal	Range	Voltage (VDC)	Current (mA) MAX./Min	Full Load Typ.	No Load Typ.		mVp-p		Min.	Typ
									Typ.	Max.		
CE/ RoHS	PFD20-18S3V3A3(C)2	24	9-36	3.3	5000/0	781	33	10000	50	100	86	88
	PFD20-18S05A3(C)2	24	9-36	5	4000/0	926	33	5000	50	100	88	90
	PFD20-18S09A3(C)2	24	9-36	9	2222/0	926	33	3000	50	100	88	90
	PFD20-18S12A3(C)2	24	9-36	12	1667/0	926	5	1000	50	100	88	90
	PFD20-18S15A3(C)2	24	9-36	15	1333/0	926	5	800	50	100	88	90
	PFD20-18S24A3(C)2	24	9-36	24	833/0	915	5	500	50	100	89	91
--	PFD20-18S18A3(C)2	24	9-36	18	1111/0	936	5	600	50	100	87	89
--	PFD20-18S28A3(C)2	24	9-36	28	714/0	915	5	500	50	100	89	91
CE/ RoHS	PFD20-36S3V3A3(C)2	48	18-75	3.3	5000/0	390	17	10000	50	100	86	88
	PFD20-36S05A3(C)2	48	18-75	5	4000/0	463	17	5000	50	100	88	90
	PFD20-36S09A3(C)2	48	18-75	9	2222/0	463	17	3000	50	100	88	90

	PFD20-36S12A3(C)2	48	18-75	12	1667/0	457	5	1000	50	100	88	91
CE/	PFD20-36S15A3(C)2	48	18-75	15	1333/0	457	5	800	50	100	88	91
RoHS	PFD20-36S24A3(C)2	48	18-75	24	833/0	457	5	500	50	100	88	91

Note 1: "R" is with control pin and adjustment pin together, "C" is for control function only, "-T" for adjustment function, no suffix mean no extra functions;

Note 2: Suffix "-H" is with heatsink, "-TH" for chassis mounting with heatsink, "-TSH" for DIN-Rail mounting with heatsink, DIN-Rail width is: 35mm;

Note 3: Max capacitive load is, when the power supply is fully loaded, the max capacity could be connected to output, if exceed, the power supply cannot start-up;

Note 4: To reduce no load power consumption and improve efficiency of light-load, IC will be filter frequency under no-load and light-load operating, output cannot be no load, at least with 10% load or above 470uF high frequency low resistance electrolytic capacitor, otherwise the output ripple will rise.

Note 5: Due to the limited space, the above is only a partial list of products. If you need products other than the list, please contact the sales department of our company.

**Input Specification**

Item	Test Conditions	Min.	Typ.	Max.	Unit
Stand-by Consumption	Input Voltage Range	/	0.1	/	W
Input Under-Voltage Protection	24V Nominal Input	5	7	9	VDC
	48V Nominal Input	11	13	18	
Hot Plug	/	Unavailable			
Input Filter	/	π filter			
CTRL*	Module turn-on	CTRL suspended or high level (2.5-12VDC)			
	Module turn-off	CTRL connect to -Vin or low level (0-1.2VDC)			
	Input current when switched off	3mA (TYP)			

Note: \*The voltage of CTRL pin is relative to -Vin pin.

**Output Specification**

Item	Test Conditions	Min.	Typ.	Max.	Unit	
Output Voltage Accuracy	Input voltage range, nominal load	/	±1	±2	%	
Voltage Regulation	Nominal load, full voltage range	/	±0.2	±0.5	%	
Load Regulation	5% ~ 100% rated load	/	±0.5	±1	%	
Ripple & Noise	10% ~ 100% load, 20MHz bandwidth	/	50	100	mVp-p	
Dynamic Recovery Time	/	/	250	500	us	
Transient Response Deviation	25% of nominal load step, nominal input voltage	3.3V、5V output	/	±5	±8	%
		Other output	/	±3	±5	%
Turn-on delay time	Input nominal voltage	/	10	/	ms	
Output voltage adjustable (Trim)	Input voltage range	90	/	110	%Vo	
Output Over-voltage Protection	Input voltage range	110	160	200	%Vo	
Output Over-current Protection		110	150	220	%Io	

Short circuit Protection	Continuous, Self-recovery
--------------------------	---------------------------

Note: 0% -10% load ripple & noise is less than or equal to 5%Vo; the ripple & noise test adopts the parallel line test method, see the ripple & noise test instructions for details.

**General Specification**


Item	Test Conditions	Min.	Typ.	Max.	Unit
Switching Frequency	Working Mode (PWM)	/	280	/	KHz
Operating Temperature	Refer to Temperature Derating Curve	-40	/	+85	°C
Storage Temperature	/	-55	/	+125	
Max Case Temperature	Within Operating Curve	/	/	+105	
Pin Resistance Soldering Temperature	The distance between the soldering point and the shell is 1.5mm, 10 seconds	/	/	300	
Relative Humidity	No condensing	5	/	95	%RH
Isolation Voltage	Input-output, test for 1min, leakage current is less than 0.5mA	1500	/	/	VDC
	Input/output-case, tested for 1 minute, leakage current is less than 0.5mA	1000	/	/	
Isolation Capacitance	Input-output, 100KHz/0.1V	/	1000	/	pF
Insulation Resistance	Input-output, voltage 500VDC	1000	/	/	MΩ
MTBF	MIL-HDBK-217F@25°C	1000	/	/	K hours
Cooling Method	Free air convection				
Case Material	Aluminum Metal Case				
Weight/ Dimension	Model	Weight Typ.	L x W x H		
	PFD20-XXSXXA3(C)2	15g	25.4X 25.4X12.5 mm	1X1X0.492inch	
	PFD20-XXSXXA3(C)2-H	19g	25.4X25.4X18.0mm	1X1X0.708inch	
	PFD20-XXSXXA3(C)2-T	37g	76X31.5X21.3mm	2.99X1.24X0.838inch	
	PFD20-XXSXXA3(C)2-TH	40g	76X31.5X26.0mm	2.99X1.24X1.023inch	
	PFD20-XXSXXA3(C)2-TS	57g	76X31.5X26mm	2.99X1.24X1.023inch	
	PFD20-XXSXXA3(C)2-TSH	60g	76X31.5X30.8mm	2.99X1.24X1.212inch	

**EMC Characteristics**

Total Items	Sub Items	Test Standard	Class			
EMC	EMI	CE	CISPR32/EN55032	CLASS B	(EMC Recommended Circuit)	
		RE	CISPR32/EN55032	CLASS B	(EMC Recommended Circuit)	
	EMS	RS	IEC/EN61000-4-3	10V/m	Perf.Criteria B (EMC Recommended Circuit)	
		CS	IEC/EN61000-4-6	3Vr.m.s	Perf.Criteria B (EMC Recommended Circuit)	
		ESD	IEC/EN61000-4-2	Contact ±6KV / Air ±8KV Perf.Criteria B		
		Surge	IEC/EN61000-4-5	±2KV	Perf.Criteria B (EMC Recommended Circuit)	
		EFT	IEC/EN61000-4-4	±2KV	Perf.Criteria B (EMC Recommended Circuit)	

	Voltage dips, short interruptions and voltage variations immunity	IEC/EN61000-4-11	0%~70%	Perf.Criteria B
--	---	------------------	--------	-----------------



**Ripple & Noise Test: (Parallel Line Test Method 20MHz bandwidth)**




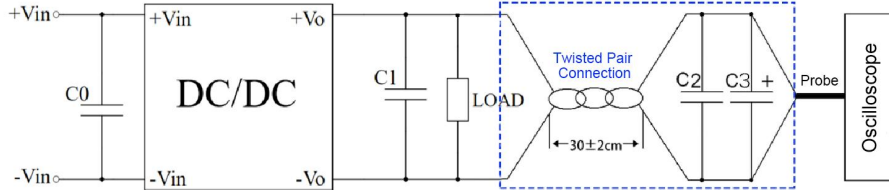


Test conditions:

- Ripple noise is connected using 12# twisted pair cable, the oscilloscope is sampled using the sampling mode, the oscilloscope bandwidth is set to 20MHz, a 100M bandwidth probe is used, and the probe cap and ground clip are removed; and C2 (0.1uF) polypropylene capacitor and C3 (10uF) high-frequency low-resistance electrolytic capacitor are connected in parallel at the probe end of the twisted pair cable, and the capacitance values of C0 and C1 refer to the design application circuit data;
- Ripple noise test: The module input end (INPUT) is connected to the input power supply, and the power supply output is connected to the electronic load (LOAD) through the power line. The test is sampled from the power output port using a 30±2 cm twisted pair cable alone, and connected to the oscilloscope probe according to the polarity.

**Product Characteristic Curve**

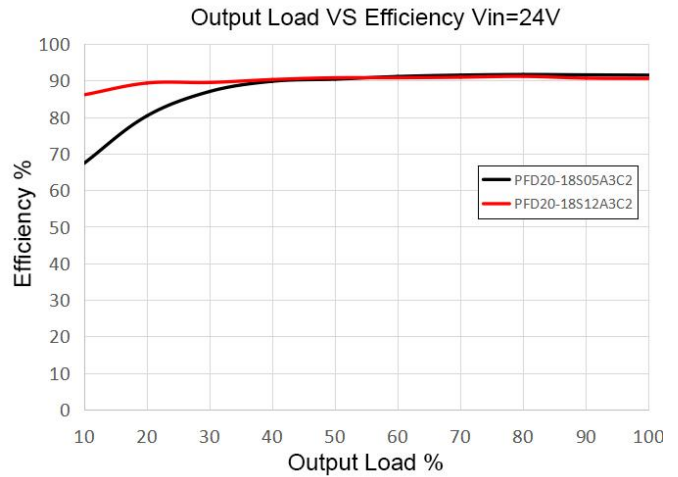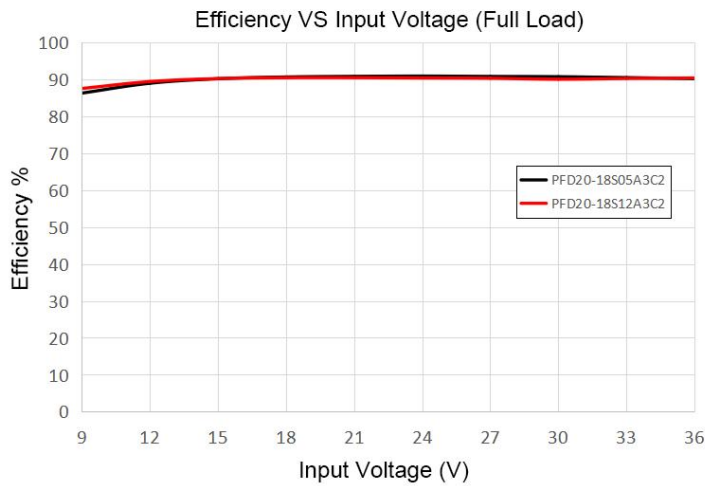

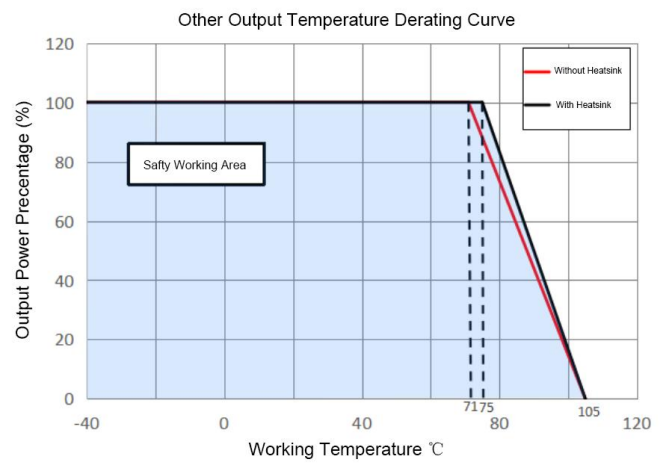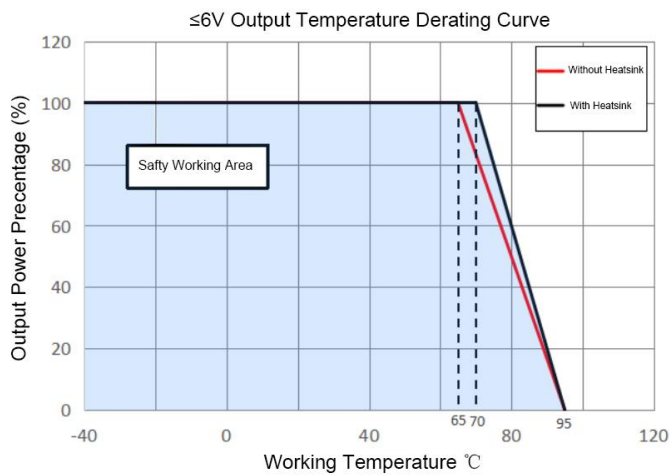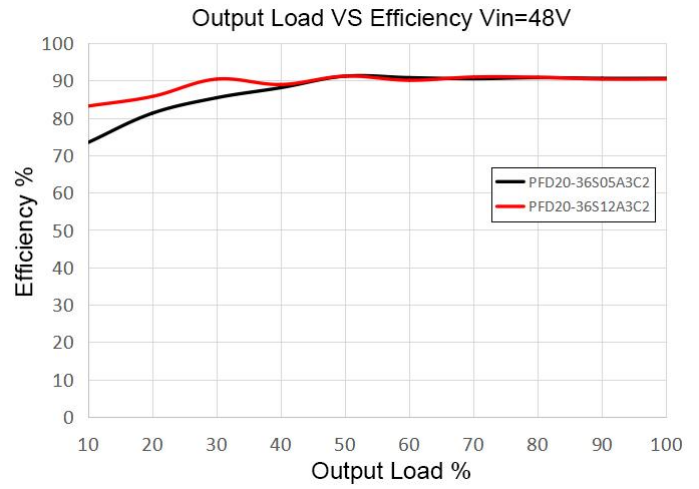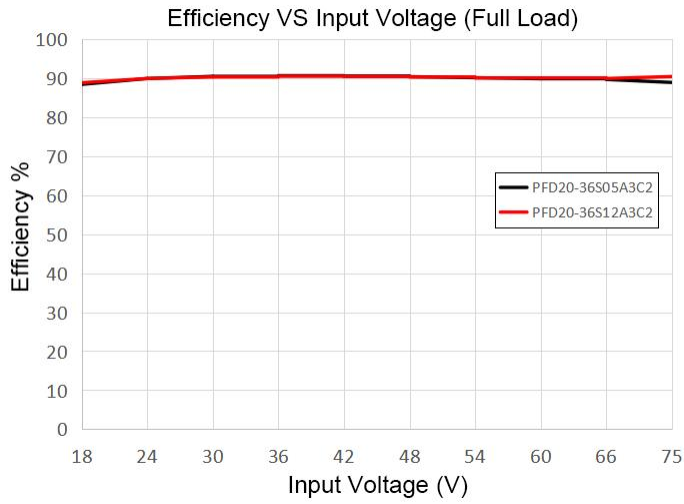


**Design Reference Applications**

**Recommended circuit**

**1. DC/DC test circuit:**


Generally recommended capacitors: C0: 47-100uF; C1: 10-22uF;

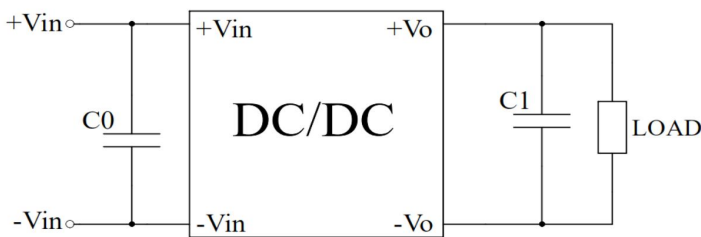

Component	Parameter
C	100uF/100V
L	22uF/100V


**2. Input reflected ripple current test circuit:**

Capacitor C needs to be a low ESR type capacitor, and the withstand voltage value should be greater than the maximum input voltage of the product;

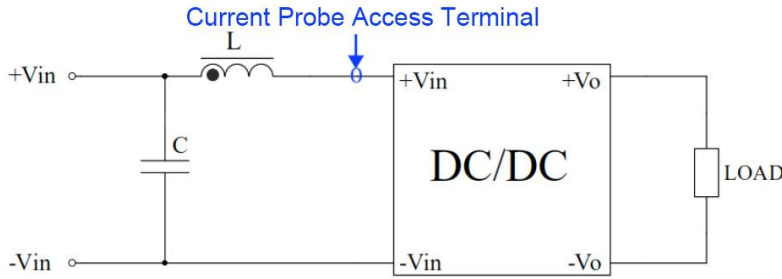

Component	Parameter
C	220uF/100V
L	4.7uH/15A

**3. Recommended EMC peripheral circuits:**

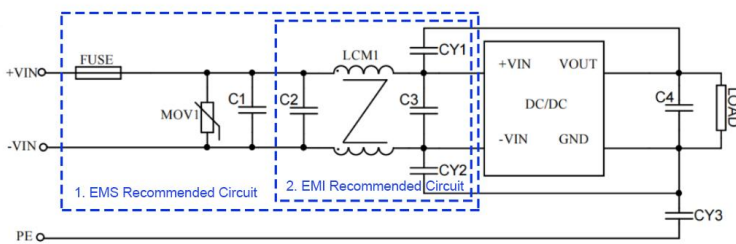


EMC Recommended Circuit

Component	24V Input	48V Input
FUSE	Connect the corresponding fuse according to customer needs	
MOV1	14D560K	14D101K
LCM1	5mH	5mH
C1,C2,C3	330uF/50V	330uF/100V
C4	47uF/50V	47uF/50V
CY1,CY2	2.2nF/2000V	

Note: Part 1 in the figure is for EMS testing, and part 2 in the figure is for EMI filtering, which can be adjusted according to the situation.

**4. Use of Trim resistor and calculation of Trim resistor:**

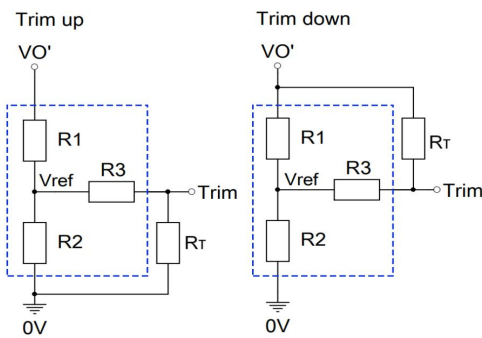

Trim resistance calculation formula:

$$\text{up: } R_T = \frac{aR_2}{R_2 - a} - R_3 \qquad a = \frac{V_{ref}}{V_o' - V_{ref}} \cdot R_1$$


$$\text{down: } R_T = \frac{aR_1}{R_1 - a} - R_3 \qquad a = \frac{V_o' - V_{ref}}{V_{ref}} \cdot R_1$$

RT is the Trim resistor, a is a custom parameter, and Vo' is the actual required up or down voltage


Note: Trim uses circuits, and the dotted box area is the interior of the product.

Output Voltage	Trim uses internal circuit parameters			
	Vout(VDC)	R1(KΩ)	R2(KΩ)	R3(KΩ)
3.3	4.22	2.55	18	1.25
5	5.1	5.1	20	2.5
9	9.31	3.58	24	2.5
12	18	4.75	33	2.5
15	18	3.6	30	2.5
18	25.5	4.083	30	2.5
24	30	3.48	30	2.5
28	20	2.94	30	2.5

**A3 Packing Dimension(Without Heat Sink)**

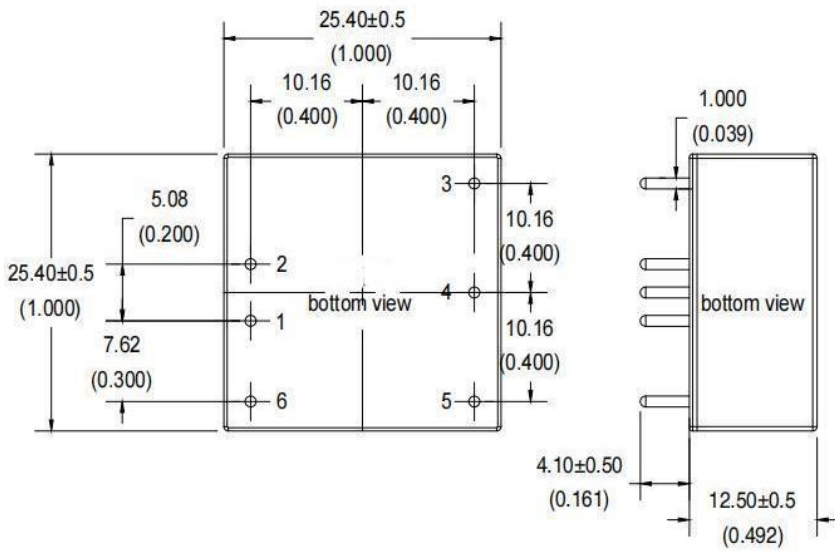

THIRD ANGLE PROJECTION

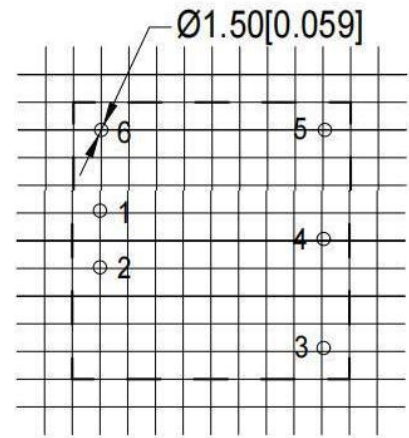


Grid: 2.54\*2.54mm  
 Unit: mm[inch]  
 Pin tolerance: ±0.10 [±0.004]  
 General tolerance: ±0.50 [±0.020]


**Pin Definition**

Pin	1	2	3	4	5	6
PFD20-XXSXXA3R2	-Vin	+Vin	+Vo	Trim	GND	Ctrl

**A3-H Packing Dimension(With Heat Sink)**

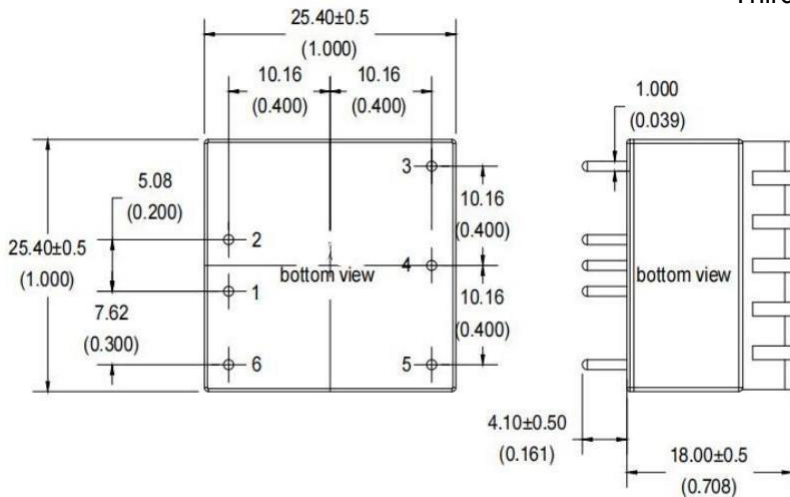

Third Angle Projection

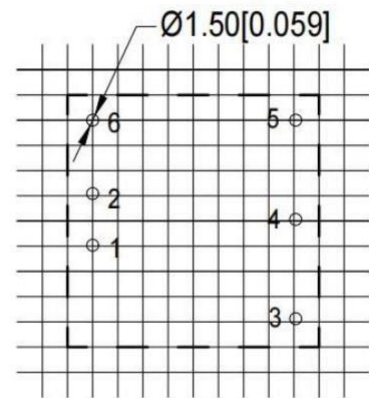


Measurement unit: mm [Inch]  
 Lattice spacing: 2.54\*2.54mm  
 Terminal diameter tolerance: ±0.1 [±0.004]  
 Unmarked tolerance: ±0.5 [±0.02]

**Pin Definition**

Pin	1	2	3	4	5	6
PFD20-XXSXXA3R2	-Vin	+Vin	+Vout	Trim	GND	Ctrl


**A3-T Packing Dimension(Without Heat Sink)**

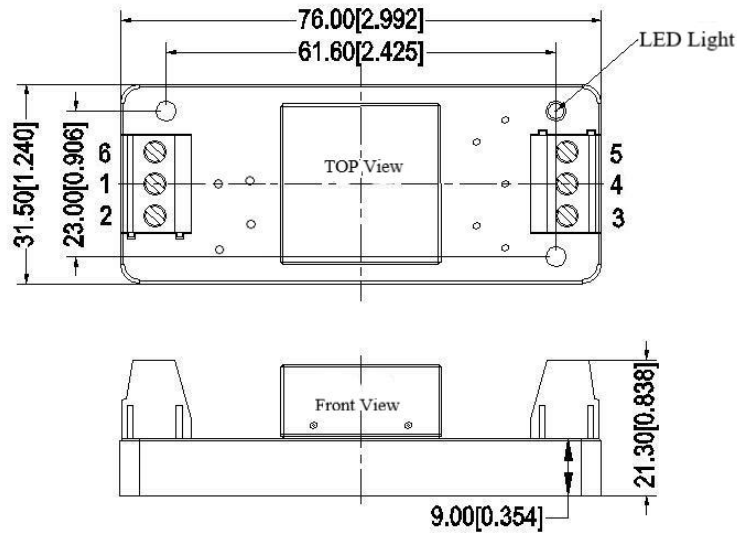

**Pin Definition**

Pin	1	2	3	4	5	6
PFD20-XXSXXA3R2	-Vin	+Vin	+Vout	Trim	GND	Ctrl

**A3-TH Packing Dimension(With Heat Sink)**

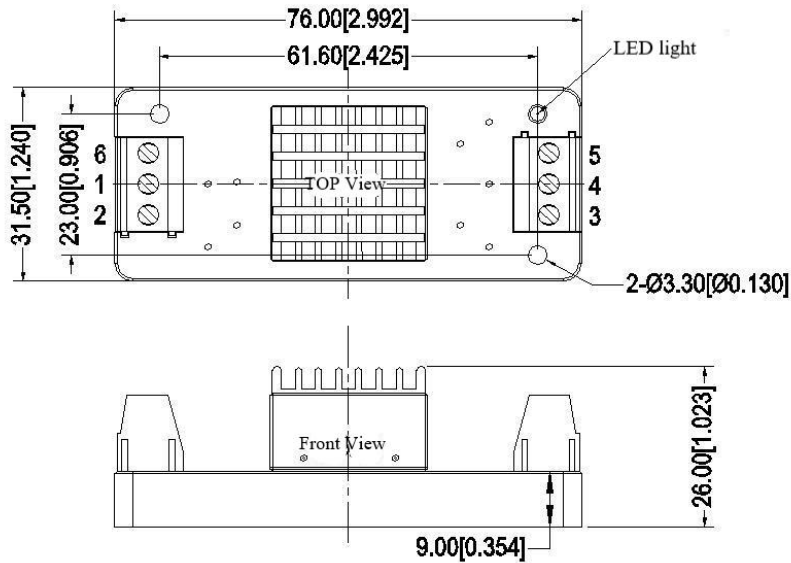


**Pin Definition**

Pin	1	2	3	4	5	6
PFD20-XXSXXA3R2	-Vin	+Vin	+Vout	Trim	GND	Ctrl




**A3-TS Packing Dimension(Without Heat Sink)**

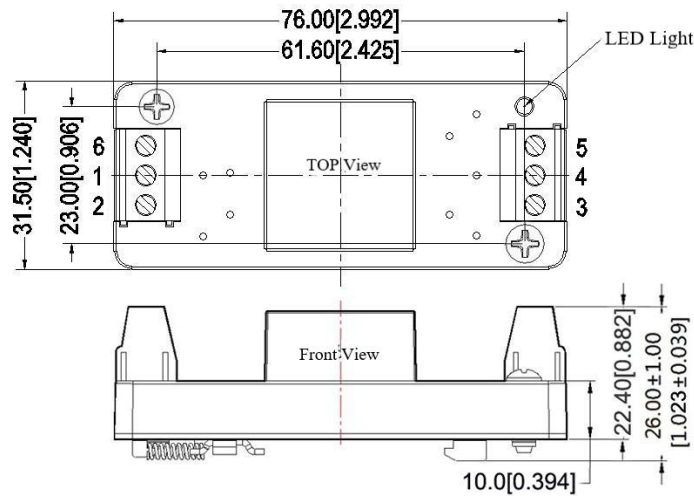

**Pin Definition**

Pin	1	2	3	4	5	6
PFD20-XXSXXA3R2	-Vin	+Vin	+Vout	Trim	GND	Ctrl

**A3-TSH Packing Dimension(With Heat Sink)**

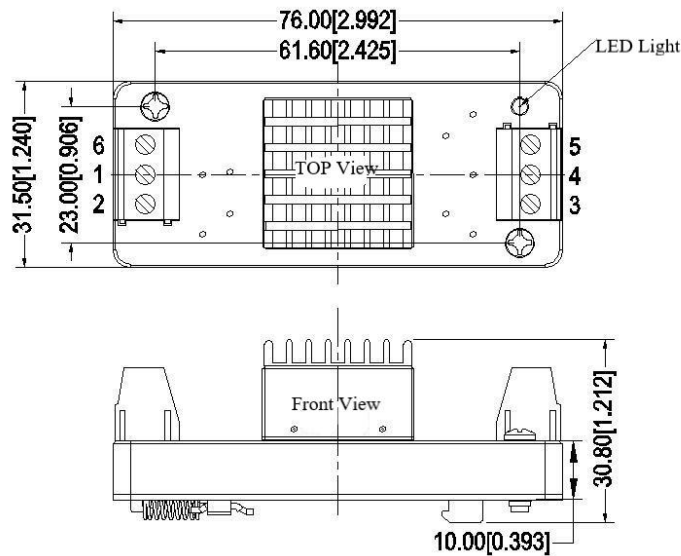

**Pin Definition**

Pin	1	2	3	4	5	6
PFD20-XXSXXA3R2	-Vin	+Vin	+Vout	Trim	GND	Ctrl

**Other Models Pin Definition**

Pin	1	2	3	4	5	6
PFD20-XXSXXA3N2	-Vin	+Vin	+Vout	NP	GND	NP
PFD20-XXSXXA3C2	-Vin	+Vin	+Vout	NP	GND	Ctrl
PFD20-XXSXXA3T2	-Vin	+Vin	+Vout	Trim	GND	NP

**Note:**

1. The product should be used within the specification range, otherwise it will cause permanent damage to the product;
2. If the product works below the minimum required load, it cannot be guaranteed that the product performance meets all the performance indicators in this manual;
3. If the product works beyond the product load range, it cannot be guaranteed that the product performance meets all the performance indicators in this manual;
4. Unless otherwise specified, the above data are measured at  $T_a=25^{\circ}\text{C}$ , humidity<75%, input nominal voltage and output rated load (pure resistance load);
5. All the above index test methods are based on our company's standards;
6. The above are the performance indicators of the product models listed in this manual. Some indicators of non-standard model products will exceed the above requirements. For specific circumstances, please contact our technical personnel directly;
7. Our company can provide product customization;
8. Product specifications are subject to change without prior notice. Please pay attention to the latest manual published on our official website.

**Guangzhou Aipu Electron Technology Co., Ltd**

Address: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, China.

Tel: 86-20-84206763 Fax: 86-20-84206762 HOTLINE: 400-889-8821

E-mail: sales@aipu-elec.com Website: <https://www.aipupower.com>