

Typical Features	
◆ Narrow Input voltage range	
◆ Typical Efficiency (Typ 86%)	
◆ Switching frequency: 100 KHz	
◆ Over current / Short circuit protection, Self-furbish	
◆ Input-output isolation	
◆ PCB mounting	
◆ Metal case shield	

Technology Parameter
Test Condition: Unless otherwise specified, data in the datasheet should be tested under the conditions of inputting nominal voltage, pure resistance rated load and Ta=25°C.

Input Specifications	Min(Vac)	Nom(Vac)	Max(Vac)	Notes
Input voltage(Vac)	165(200Vdc)	220	265(380Vdc)	N
Input frequency range(Hz)	47		440	
Remote Control	Unavailable			

Output Specifications			
Output Voltage accuracy		Vo1	±1.0%
Line regulation	Nominal load,full voltage range	Vo1	±0.2%
Load regulation	20% ~ 100% nominal load	Vo1	±0.5%
Ripple & Noise	20MHz BM(full load)		
			≤120 mVp-p
Turn-on delay time	TYP		1S


General Specifications			
Transfer Efficiency	Nominal input voltage,full load		86%(Typ)
Switching frequency		100KHz(T y p .)	
Operating temperature		Free air convection	-25°C ~ +65°C
Storage temperature			-40°C ~ +105°C
Max case temperature			+90°C
Relative humidity			10%~90%
Case material			Metal case
Isolation Voltage	Input-output 2.5KV ≤ 1.5mA/1min; Input- case Input-FG 1.5KV ≤ 1.5mA/1min		
MTBF	2X10 ⁵ Hrs		

Typical Product List

Item	Input voltage range	Output voltage / Current					
		VO1		VO2		VO3	
		V	mA	V	mA	V	mA
NA200-220S12M1	165~265Vac/ 200~380Vdc	12V	16600mA				
NA200-220S15M1		15V	13300mA				
NA200-220S24M1		24V	8330mA				
NA200-220S48M1		48V	4160mA				

Note : Due to space limitations, above is only a part of our product list, please contact our sales team for more items.


Dimension

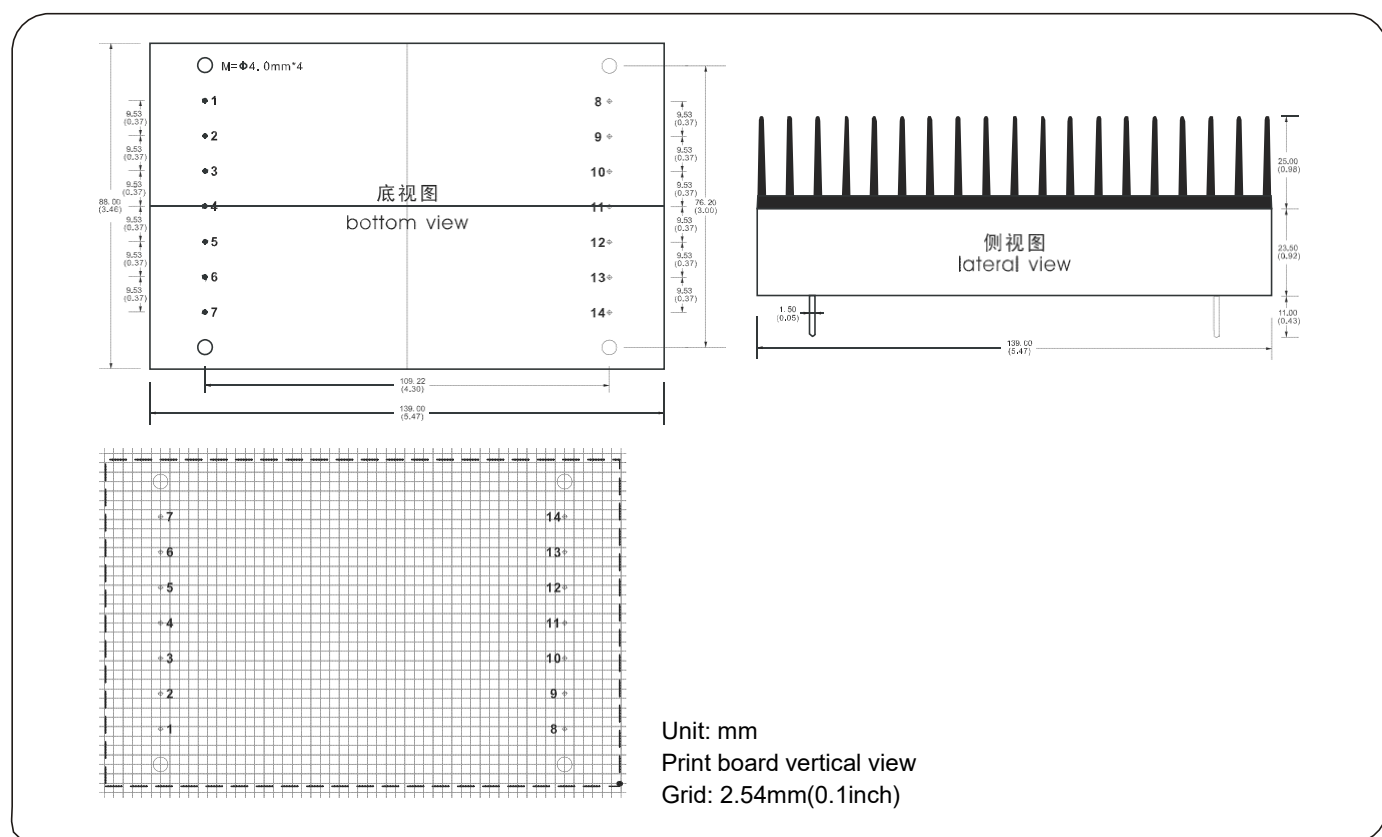

Packing Dimension

Code	L x W x H	
M1	139.00 × 88.00 × 23.50mm	5.47 × 3.46 × 0.93inch

Temperature Curve

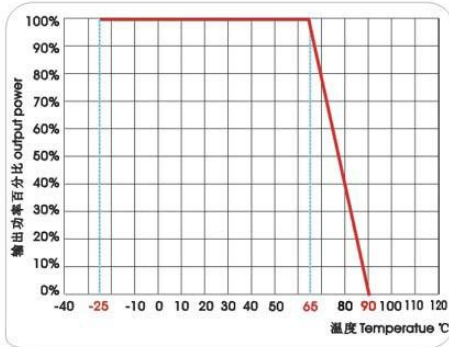

Single (S)	1	2	3	4	5	6	7
	AC(N)	NP	AC(L)	NP	NP	NP	FG
	8	9	10	11	12	13	14
	+Vo	+Vo	-Vo	-Vo	+S	TRIM	-S

Note: If the definition of pin is not in accordance with the model selection manual, please refer to the label on actual item.