



**Conform to CE Standard**

### Typical Features

- ◆ Wide input voltage range 2:1
- ◆ High efficiency up to 90%
- ◆ Low no-load power consumption
- ◆ Operating Temperature: -40°C to +105°C
- ◆ High isolation voltage, input-output 2500VAC, input-case 2100VAC
- ◆ Protection: input under voltage, output over current, over voltage, short circuit, over temp
- ◆ Standard 1/4 brick

**ZCD250-280S48** high efficiency 1/4 brick dc-dc converter, rated input voltage 280VDC, output 48V/250W, no minimum load, wide input voltage 180-425VDC, regulated single output, high isolation insulation voltage, allowing operating temperature up to 105 °C, with input under-voltage protection, output over-current protection, over-voltage protection, over-temperature protection, short-circuit protection, remote control and remote compensation, output voltage regulation and other functions.

### Typical Product List

Part No	Input voltage range (VDC)	Output power (W)	Output voltage (VDC)	Output current (A)	Ripple & Noise (mV)	Full load efficiency(%) Min/Typ.	Note
ZCD250-280S48C	180-425	250	48	5.2	480	88/90	Standard positive logic
ZCD250-280S48N							Standard negative logic
ZCD250-280S48C-H							Heatsink positive logic
ZCD250-280S48N-H							Heatsink negative logic

### Input Specification

Item	Operating conditions	Min.	Typ.	Max.	Unit
Max input current	180V input voltage, full load output	--	--	1.8	A
No load input current	Rated input voltage	--	--	10	mA
Input surge voltage (1sec. max.)	Inputs above this range may cause permanent damage	-0.7	--	430	VDC
Start up voltage		--	--	180	
Input under voltage protection	no-load test, full load test can trigger overcurrent protection prematurely.	--	--	165	
Control Pin(CNT)	Positive logic: CNT is suspended or connected to 3.5-15V to turn on, connected to 0-1.2V to turn off				Reference voltage-VIN
	Negative logic: CNT is suspended or connected to 3.5-15V to turn off, connected to 0-1.2V to turn on				

### Output Specification

Item	Working conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	Nominal input voltage, 0%-100% load	--	±0.2	±1.0	%

Line Regulation	Full load, input voltage from low to high	--	±0.1	±0.2	
Load Regulation	Nominal input voltage, 10%-100% load	--	±0.1	±0.2	
Transient recovery time	25% load step change (step rate 1A/50uS)	--	200	250	uS
Transient Response Deviation		-5	--	5	%
Temperature Drift Coefficient	Full load	-0.02	--	+0.02	%/°C
Ripple & Noise	20M bandwidth, external capacitor above 470uF	--	300	480	mVp-p
Output voltage adjustment (TRIM)		-20	--	+10	%
Output voltage remote compensation (Sense)		--	--	105	%
Over temp protection	Maximum temperature of product metal substrate surface	105	115	125	°C
Output overvoltage protection		125	--	140	%
Output overcurrent protection		6	--	8	A
Output short circuit protection		Hiccup, continuous, self-recovery			

**General Specification**

Item	Operating conditions		Min.	Typ.	Max.	Unit
Isolation Voltage	I/P-O/P	Test 1min, leakage current < 3mA	--	--	2500	VAC
	I/P-Case	Test 1min, leakage current < 3mA	--	--	2100	VAC
	O/P-Case	Test 1min, leakage current < 3mA	--	--	500	VAC
Insulation resistance	I/P-O/P	Insulation voltage 500VDC	100	--	--	MΩ
Switching frequency				230	--	KHz
MTBF			150		--	K hours

**Environmental Characteristics**

Item	Operating conditions		Min.	Typ.	Max.	Unit
Operating Temperature	See temperature derating curve		-40	--	+105	°C
Storage Humidity	No condensing		5	--	95	%RH
Storage Temperature			-40	--	+125	°C
Soldering resistance of pins	The solder joint is 1.5mm away from the shell, and the soldering time < 1.5S		--	--	+350	
Cooling requirements			EN60068-2-1			
Dry heat requirement			EN60068-2-2			
Damp heat requirement			EN60068-2-30			
Shock and vibration			IEC/EN 61373 Body 1 Class B			






**EMC Characteristics (EN50155)**

EMI	CE	EN50121-3-2	150kHz-500kHz 79dBuV			
		EN55016-2-1	500kHz-30MHz 73dBuV			
	RE	EN50121-3-2	30MHz-230MHz 40dBuV/m at 10m			
		EN55016-2-1	230MHz-1GHz 47dBuV/m at 10m			
EMS	ESD	EN50121-3-2	Contact ±6KV/Air ±8KV			perf. Criteria A
	RS	EN50121-3-2	10V/m			perf. Criteria A
	EFT	EN50121-3-2	±2kV 5/50ns 5kHz			perf. Criteria A
	Surge	EN50121-3-2	line to line ± 1KV (42Ω, 0.5μF)			perf. Criteria A
	CE	EN50121-3-2	0.15MHz-80MHz 10 Vr.m.s			perf. Criteria A

**Physical Characteristics**

Case Materials	Metal bottom shell + black flame retardant material shell (UL94 V-0)
Heat sink	Dimension 61*39.0*15mm, weight 52g, aluminum alloy, anodized black
Cooling method H	Conduction cooling or forced air cooling
Product Weight	Standard 72g, with heatsink 125g


**Dimension and Pin-Out**

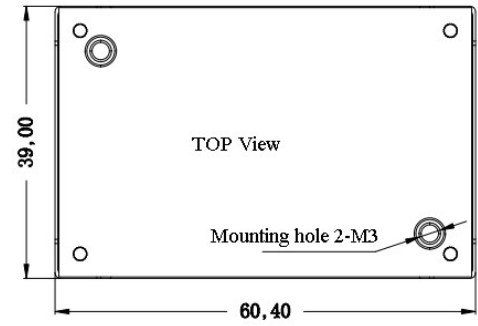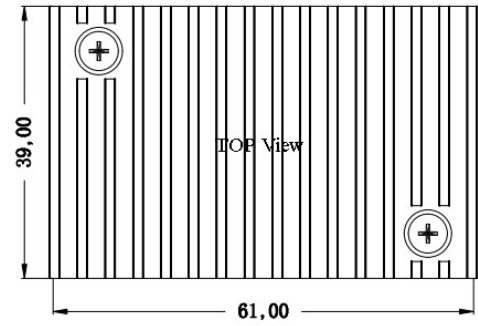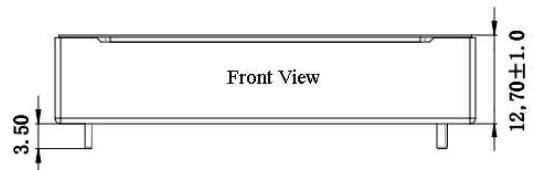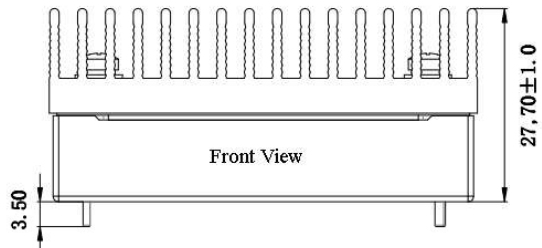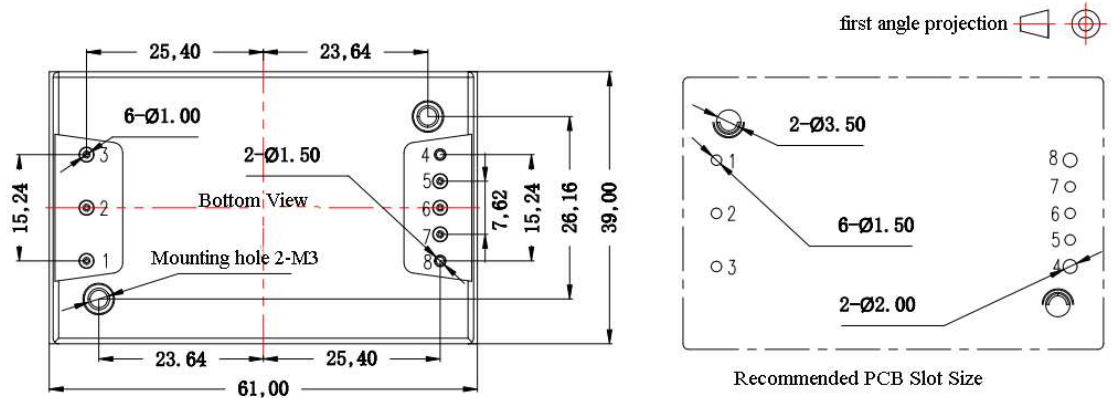

Standard+Heatsink  
61.0\*39.0\*27.7mm



Standard  
60.4\*39.0\*12.7mm

Note:  
unit:mm  
Pin1,2,3,5,6,7 dia:1.00  
Pin4,8 :1.50  
general tolerance:±0.10  
mounting hole tightening torque: Max 0.4N\*m

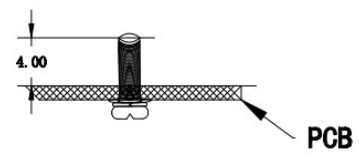

	1	2	3	4	5	6	7	8
Pin-Out	Vin+	CNT	Vin-	Vout-	-S	TRIM	+S	Vout+

**Product Characteristic Curve**

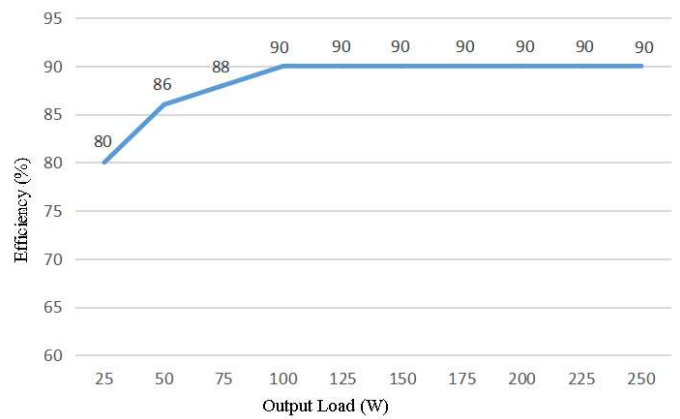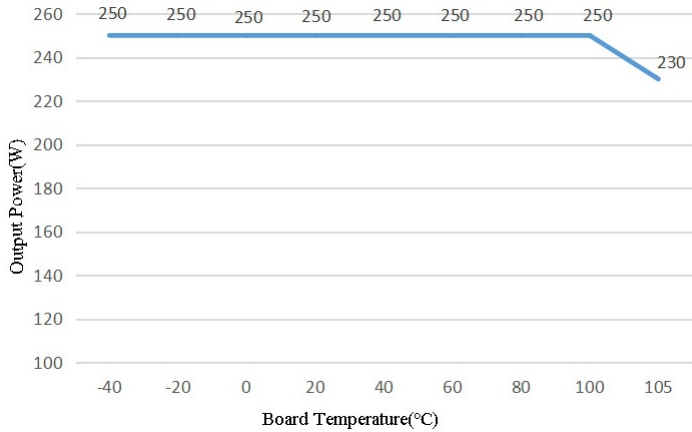


**Note:**

- Both the temperature derating curve and the efficiency curve are tested with typical values;
- The temperature derating curve is tested according to our laboratory test conditions. If the actual environmental conditions used by customers are inconsistent, it is necessary to ensure that the temperature of the aluminum casing of the product does not exceed 100 °C, and it can be used within any rated load range.

**Design Reference**

**1. Ripple & Noise**


All DC/DC converters of this series are tested according to the test circuit recommended in the following figure before leaving the factory.

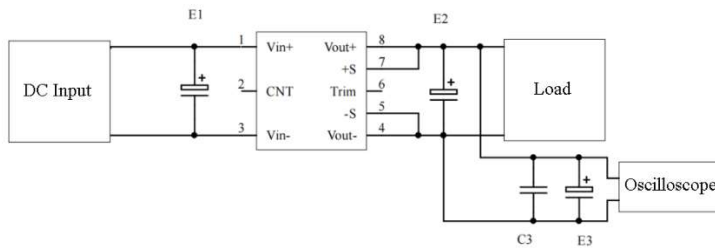

capacitor value	E1 (μF)	E2 (μF)	C1 (μF)	E3 (μF)
Output voltage				
3.3VDC	100	220	1	10
5VDC				
12VDC				
.....				
48VDC	68	68		
.....				
110VDC				


**2. Recommended application circuit**

If customer does not use the circuit recommended by our company, please be sure to connect an electrolytic capacitor of at least 100 μF in parallel at the input end to suppress the possible surge voltage at the input end.

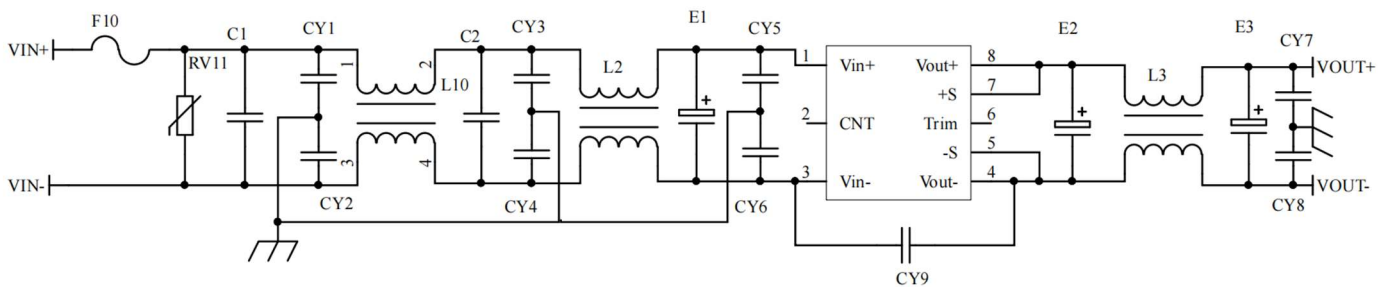


F1	T3.15A/250Vac fusing
RV1	14D 510V Varistor
C1,C2	224/305Vac X2 Capacitor
CY1,CY2,CY3,CY4,CY5,CY6	102/250vac Safety Y2 capacitor
CY7,CY8	103/2KV ceramic capacitor
CY9	471/250Vac safety Y1 capacitor
E1	100μF/450V Electrolytic Capacitor
E2, E3	220μF/63V Electrolytic Capacitor
L1,L2	inductance is greater than 5mH, and the overcurrent 1.8A temperature rise is less than 25°C
L3	inductance is greater than 0.3mH, and the overcurrent 5.5A temperature rise is less than 25°C

**3. Remote control terminal (CNT) control method application recommendation**

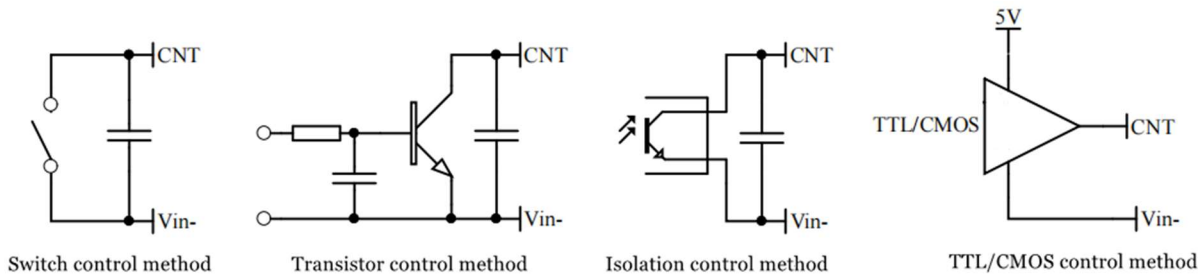

**4. Sense usage and precautions**


(1) Without far-end compensation:

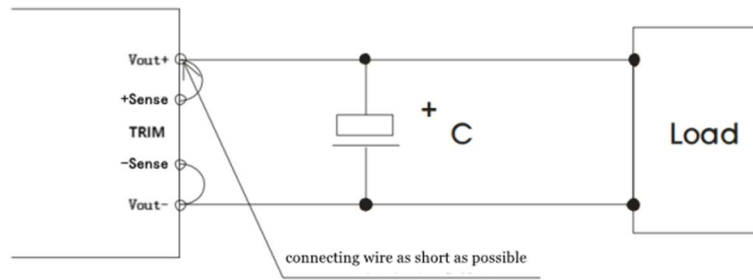

Precautions:

1. Do not use remote compensation, make sure Vout+ and Sense+, Vout- and Sense- are short-circuited;
2. The connection between Vout+ and Sense+, Vout- and Sense- should be as short as possible and close to the pins, otherwise the module may become unstable.

(2) Using remote compensation

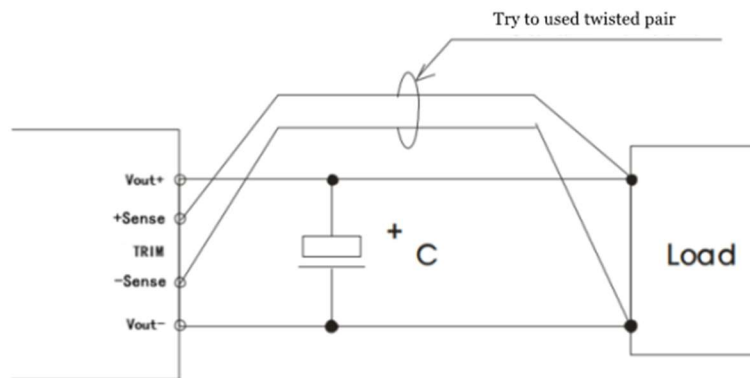


Precautions:

1. When the long-end compensation lead is used, the output voltage may be unstable;
2. If remote compensation is used, please use twisted pair or shielded wire, and keep the lead wire as short as possible;
3. Please use wide PCB leads or thick wires between the power module and the load, and keep the line voltage drop below 0.3V to ensure that the power output voltage remains within the specified range;
4. The impedance of the leads may cause the output voltage to oscillate or have larger ripples. Please verify it before use.


**5. Use of TRIM and calculation of TRIM resistance**

The relationship between output change voltage  $\Delta U$  and resistance is as follows:



Voltage up regulation: add resistor  $R_{up}$  between Trim and output negative

$$R_{up} = 140 / \Delta U - 5.1 \text{ (K}\Omega\text{)}$$



Voltage Down: Add resistor  $R_{down}$  between Trim and output positive

$$R_{down} = 56 * (48 - 2.5 - \Delta U) / \Delta U - 5.1 \text{ (K}\Omega\text{)}$$

**6. This product does not support the use of direct parallel connection to increase the power. If you need to use it in parallel, please consult our technical staff.**

## Others

- 1 The warranty period of this product is two years. During the normal damage, it will be repaired free of charge. Damages caused by errors in the use method or manufacturing technology, a paid service is provided.
- 2 Our company can provide product customization and matching filter modules. For details, please contact our technical staff directly.

### **Guangzhou Aipu Electron Technology Co., Ltd**

Address: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, China.

Tel: 86-20-84206763 Fax: 86-20-84206762 HOTLINE: 400-889-8821

E-mail: sales@aipu-elec.com Website: www.aipupower.com