


Typical Features

- ◆ Wide input voltage range (4:1)
- ◆ Efficiency 90% (Typ.)
- ◆ Standby power consumption 0.15W (Typ.)
- ◆ Output fast start up
- ◆ Continuous Short Circuit protection, Self-recovery
- ◆ Input under-voltage protection, output over voltage, short circuit, over current protections
- ◆ Isolation Voltage 1500VDC
- ◆ Operating Temperature from -40°C to +105°C
- ◆ Good EMC performance
- ◆ International standard pin-out

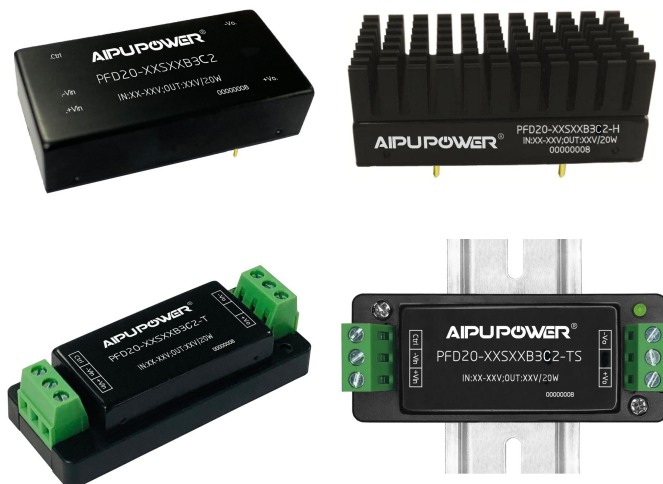

Application Field

PFD20-XXSXXB3(C)2 series --- DIP mounting standard 2"X1" size modular DC-DC converters with wide input voltage range 4:1, low stand-by power consumption, isolated & regulated single output 20W. This series of products can be widely used in the fields of industrial control, instrumentation, communication, electric power and IoT, etc. The additional circuit for EMC is recommended in this data sheet for the application with high EMC requirement.

Typical Product List

Certificate	Part No	Input Voltage Range (VDC)		Output Voltage/Current (VDC/mA)		Input Current @Nominal voltage (mA)Typ.		Max. Capacitive Load(uF)	Ripple & Noise (mVp-p)		Efficiency (%) @full load	
		Nom.	Range	Voltage	Current	Full load	No load	Max	Typ	Max	Min	Typ
-	*PFD20-18S3V3B3(C)2	24	9-36	3.3	5000/0	818	45	10000	50	100	84	86
-	PFD20-18S05B3(C)2	24	9-36	5	4000/0	993	80	10000	50	100	86	88
-	*PFD20-18S09B3(C)2	24	9-36	9	2222/0	969	10	4700	50	100	86	88
-	*PFD20-18S12B3(C)2	24	9-36	12	1667/0	969	10	1600	50	100	87	89
-	PFD20-18S15B3(C)2	24	9-36	15	1333/0	969	10	1000	50	100	88	90
-	*PFD20-18S24B3(C)2	24	9-36	24	833/0	969	10	500	50	100	88	90
-	PFD20-36S3V3B3(C)2	48	18-75	3.3	5000/0	409	25	10000	50	100	84	86
-	*PFD20-36S05B3(C)2	48	18-75	5	4000/0	497	60	10000	50	100	84	86
-	*PFD20-36S09B3(C)2	48	18-75	9	2222/0	485	9	4700	50	100	87	89
-	*PFD20-36S12B3(C)2	48	18-75	12	1667/0	485	9	1600	50	100	85	87
-	*PFD20-36S15B3(C)2	48	18-75	15	1333/0	485	9	1000	50	100	88	90
-	*PFD20-36S24B3(C)2	48	18-75	24	833/0	485	9	500	50	100	86	88

Note

- * marked part has been developed in process.
- In the part numbers R indicates the part with both Remote Control & Trim functions, C indicates the part with Control function, N indicates with None of Control or Trim.
- The suffix -H indicates the part with Heat sink, -T indicates a kind of chassis packaging, -TS indicates a kind of packaging of DIN Rail which width is 35mm.
- The above efficiency is tested at Nominal input voltage and rated load.

5. The maximum capacitive load is the capacitance allowed to be used when the power supply operates at full load. The converter may not start if the capacitor exceeds this value.

6. Please contact Aipu sales for other output voltages requirement in this series but not listed in this table.

Input Specifications

Items	Test Conditions	Min.	Typ.	Max.	Unit
Stand-by power Consumption	Full input voltage range	/	0.15	/	W
Input inrush voltage (1Sec. Max)	Vin=24V	-0.7	/	50	VDC
	Vin=48V	-0.7	/	100	
Start-up voltage	Vin=24V	/	/	9	
	Vin=48V	/	/	18	
Input Under-Voltage Protection	Vin=24V	5	6.5	9	
	Vin=48V	12	15.5	18	
Turn-on delay	Nominal input, constant-resistance load	/	10	/	mS
Input Filter	/	π filter			
Hot Plug	/	Unavailable			
CTRL *	Turn-on the converter	No connection or connect to a high level (3.5-12VDC)			
	Shut off the converter	Connect to -Vin or connect to low level (0-1.2VDC)			
	Current value to shut off the converter	4mA (Typ.)			

*Note: The voltage of the CTRL is relative to the input -Vin.

Output Specifications

Items	Test Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy	Full input voltage range, rated load		/	±1	±3	%
Voltage Regulation	Full input voltage range, Rated load		/	±0.2	±0.5	
Load Regulation	5%-100% rated load		/	±0.5	±1	
Ripple & Noise	0-100% load, Nominal voltage (20MHz bandwidth)		/	50	100	mVp-p
Dynamic Response Deviation	25% rated load step, nominal input voltage	3.3V & 5V output	/	±3	±8	%
		others output	/	±3	±5	
Dynamic Response Time	25% Rated load step, nominal input voltage		/	300	500	uS
Temperature Drift Coefficient	Full load		/	/	±0.03	%/°C
O/P voltage adjustable (Trim)	Full input voltage range, rated load		90	/	110	%Vo
Over voltage protection			110	140	160	
Over current protection			110	150	190	%Io
Short Circuit Protection			Hiccup, continuous, self-recovery			


General Specifications

Items	Test Conditions		Min.	Typ.	Max.	Unit
Switching Frequency	Operating Mode (PWM)		/	270	/	KHz
Operating Temperature	Refer to the Temperature Derating Curve		-40	/	+105	°C
Storage Temperature	/		-55	/	+125	
Case Temperature	Refer to Product Performance Curve		/	/	+105	
Pin Soldering Temperature	1.5mm from soldering to case, 10 sec.		/	/	300	
Relative Humidity	No condensing		5	/	95	%RH
Isolation Voltage	I/P-O/P, test 1min, leakage current <1mA		1500	/	/	VDC
Insulation Resistance	I/P-O/P, @500VDC		1000	/	/	M Ω
Isolation Capacitance	I/P-O/P, 100KHz/0.1V	PFD20-18S24B3C2	/	2050	/	pF
		Others	/	1050	/	
MTBF	MIL-HDBK-217F@25°C		1000	/	/	KHrs
Vibration	/		IEC/EN 61373 C1/Body Mounted Class B			
Cooling Method	Nature air					
Case Material	Aluminum					
Weight/Dimension	Part No.	Weight Typ.	Dimensions L x W x H			
	PFD20-XXSXXB3(C)2	22g	50.8 X 25.4 X 11.8 mm		2.00 X 1.00 X 0.465 inch	
	PFD20-XXSXXB3(C)2-H	34g	50.8 X 25.4 X 21.8 mm		2.00 X 1.00 X 0.858 inch	
	PFD20-XXSXXB3(C)2-T	43g	76.0 X 31.5 X 21.3 mm		2.99 X 1.24 X 0.838 inch	
	PFD20-XXSXXB3(C)2-TH	55g	76.0 X 31.5 X 31.0 mm		2.99 X 1.24 X 1.220 inch	
	PFD20-XXSXXB3(C)2-TS	63g	76.0 X 31.5 X 26.0 mm		2.99 X 1.24 X 1.023 inch	
	PFD20-XXSXXB3(C)2-TSH	75g	76.0 X 31.5 X 35.5 mm		2.99 X 1.24 X 1.397 inch	

EMC Performances




Total Items		Sub Items	Test Standard	Performance/Class
EMC	EMI	CE	CISPR22/EN55032	1. CLASS A 2. CLASS B (with EMC Recommended Circuit)
		RE	CISPR22/EN55032	1. CLASS A 2. CLASS B (with EMC Recommended Circuit)
	EMS	RS	IEC/EN61000-4-3	10V/m Perf.Criteria B
		CS	IEC/EN61000-4-6	3Vr.m.s Perf.Criteria B
		ESD	IEC/EN61000-4-2	Contact ±4KV Perf.Criteria B
		Surge	IEC/EN61000-4-5	±2KV Perf.Criteria B (With EMC Recommended Circuit)
		EFT	IEC/EN61000-4-4	±2KV Perf.Criteria B (With EMC Recommended Circuit)
		Voltage dips & interruptions	IEC/EN61000-4-11	0%~70% Perf.Criteria B

Ripple & Noise Test Instructions (Twisted Pair Method, 20MHz Bandwidth)

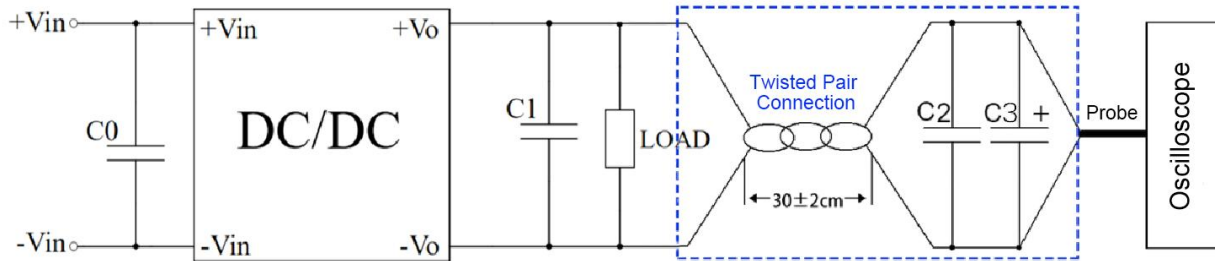


- 1) The Ripple & noise test need 12# twisted pair cables, an oscilloscope which should be set at the Sample Mode, bandwidth 20MHz. 100M bandwidth probe with cap and ground removed. C2(0.1uF) polypropylene capacitor and C3(10uF) high-frequency low-resistance electrolytic capacitor are connected in parallel with the probes and one side of the twisted pair. C0 & C1 refer to the application circuit recommended.
- 2) The power supply output connects to the load by the cables. The other side of the twisted pair (length 30cm±2 cm) should be connected in parallel with the load, the polarity of the output and the oscilloscope probe should not be reversed. The test can be started after input power on.

Product Performance Curves

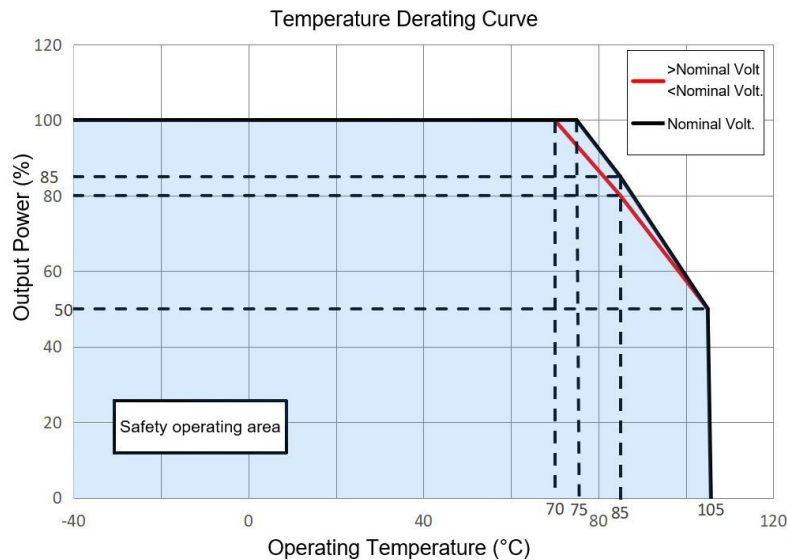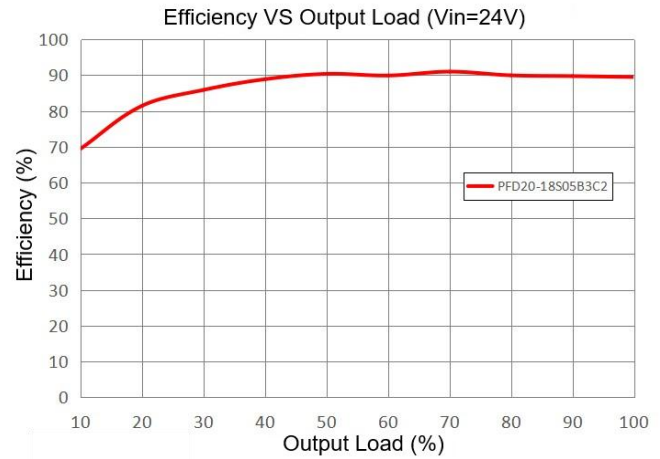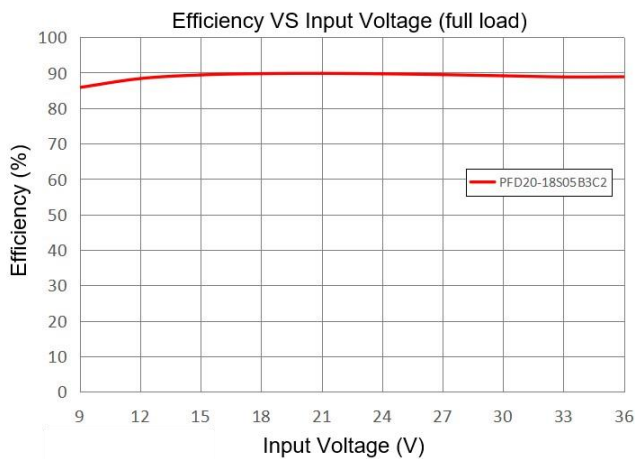


Recommended Circuits for Application

1. DC-DC test circuit

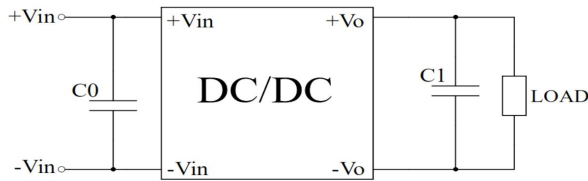

Component	Vin=24V	Vin=48V
C0	100uF/50V	100uF/100V
C1	100~470uF/50V	


2. Recommended EMC circuit

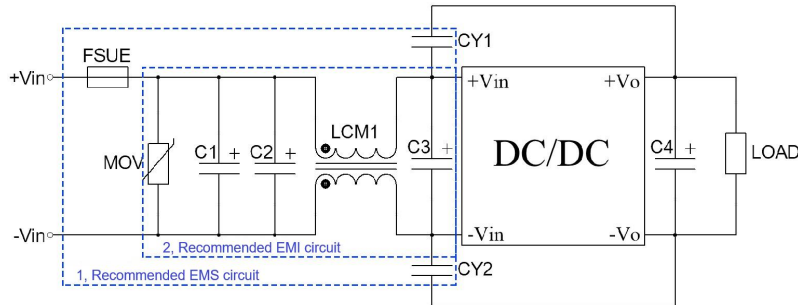

Component	Vin=24V	Vin=48V
FUSE	TBD by customer	
MOV	14D560K	14D101K
LCM1	5mH	5mH
C1,C2,C3	330uF/50V	330uF/100V
C4	47uF/50V	47uF/50V
CY1,CY2,	2.2nF/2000V	

Note: Part 1 in the circuit is for EMS, part 2 for EMI filtering, both can be adjusted according to the actual situation.

3. Trim and Trim resistance calculation

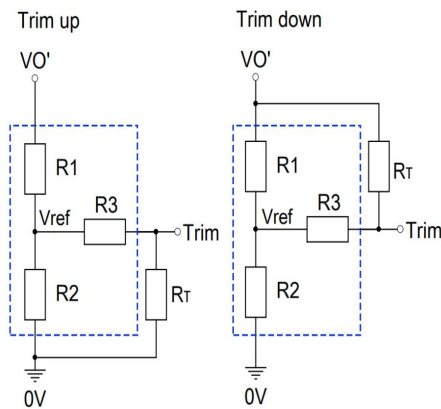

Calculation formula of the Trim resistance:


$$\begin{aligned} \text{up: } R_T &= \frac{\alpha R_2}{R_2 - \alpha} - R_3 & \alpha &= \frac{V_{ref}}{V_{o'} - V_{ref}} \cdot R_1 \\ \text{down: } R_T &= \frac{\alpha R_1}{R_1 - \alpha} - R_3 & \alpha &= \frac{V_{o'} - V_{ref}}{V_{ref}} \cdot R_2 \end{aligned}$$

R_T is the Trim resistor, α is a custom parameter, and $V_{o'}$ is the actual voltage of Trim up or Trim down.

Note: Trim up & down circuits,
The components in the dotted area are inside of the converter.

Output Voltage	Internal circuit parameters for Trim			
Vout(DC)	R1(KΩ)	R2(KΩ)	R3(KΩ)	Vref(V)
3.3	4.22	2.55	18	1.25
5	5.1	5.07	20	2.5
9	9.31	3.58	24	2.5
12	18	4.75	33	2.5
15	18	3.6	30	2.5
24	30	3.48	30	2.5

B3 Dimensions (Without Heat Sink)

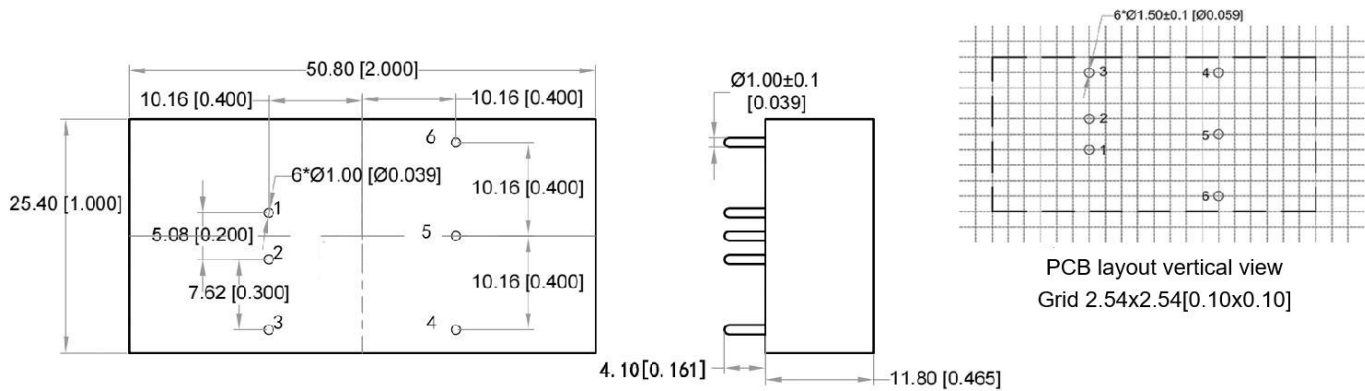


Unit: mm[inch]
Pin diameter tolerance $\pm 0.10[\pm 0.004]$
General tolerance $\pm 0.50[\pm 0.020]$

Pin function definition

Pin No.	1	2	3	4	5	6
PFD20-XXSXXB3(R)2	+Vin	-Vin	Ctrl	-Vo	Trim	+Vo

B3-H Dimensions (With Heat Sink)

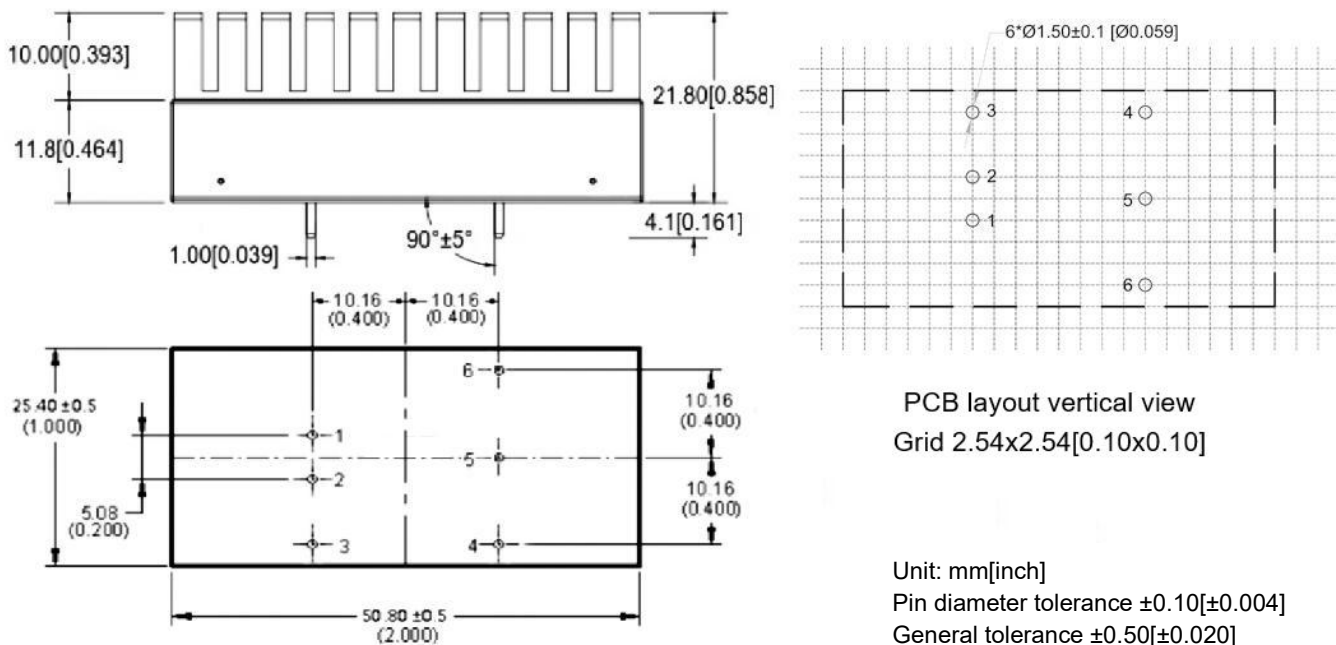


Unit: mm[inch]
Pin diameter tolerance $\pm 0.10[\pm 0.004]$
General tolerance $\pm 0.50[\pm 0.020]$

Pin function definition

Pin No.	1	2	3	4	5	6
PFD20-XXSXXB3(R)2	+Vin	-Vin	Ctrl	-Vo	Trim	+Vo


B3-T Dimensions (Without Heat Sink)

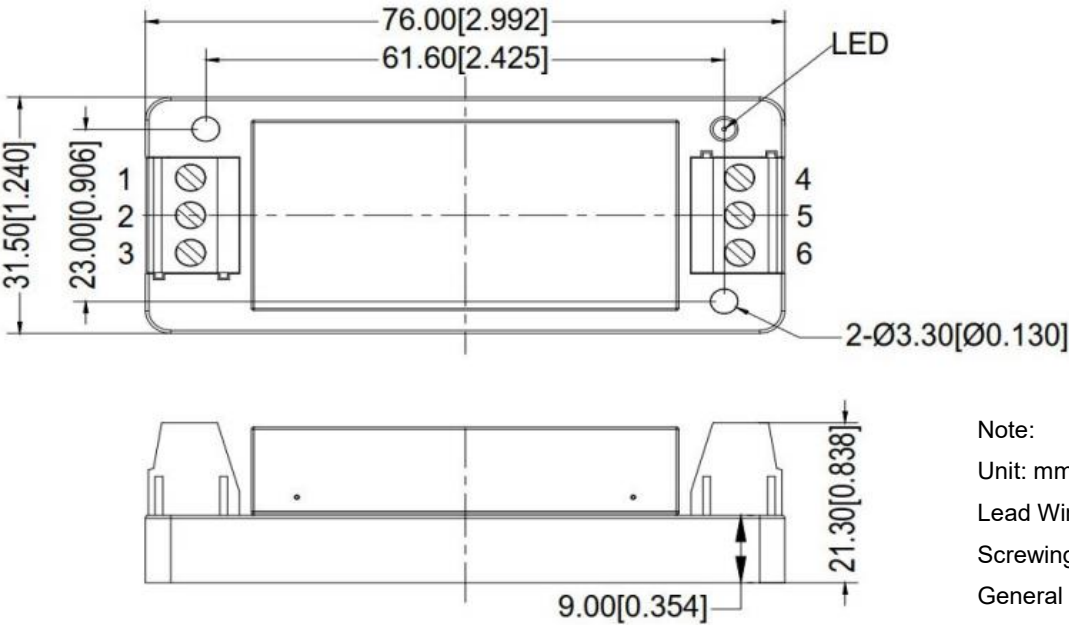

Note:
Unit: mm[inch]
Lead Wire Size: 24-12AWG
Screwing torque: 0.4 N.m Max
General tolerance: ±1.00 [±0.039]

Terminal No.	1	2	3	4	5	6
PFD20-XXSXXB3(R)2	+Vin	-Vin	Ctrl	-Vo	Trim	+Vo


B3-TH Dimensions (With Heat Sink)

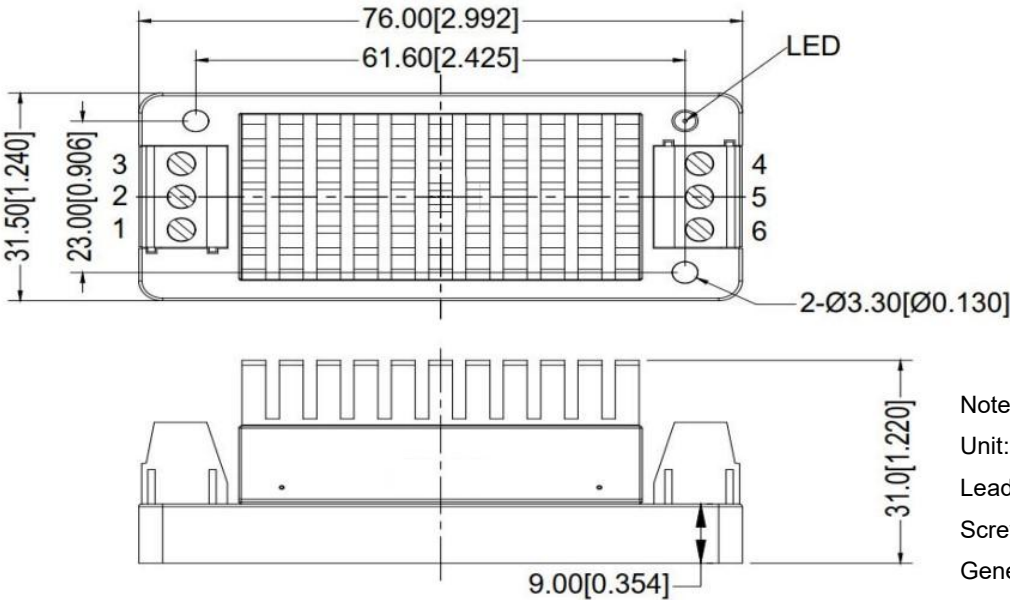

Note:
Unit: mm[inch]
Lead Wire Size: 24-12AWG
Screwing torque: 0.4 N.m Max
General tolerance: ±1.00 [±0.039]

Terminal No.	1	2	3	4	5	6
PFD20-XXSXXB3(R)2	+Vin	-Vin	Ctrl	-Vo	Trim	+Vo


B3-TS Dimensions (Without Heat Sink)

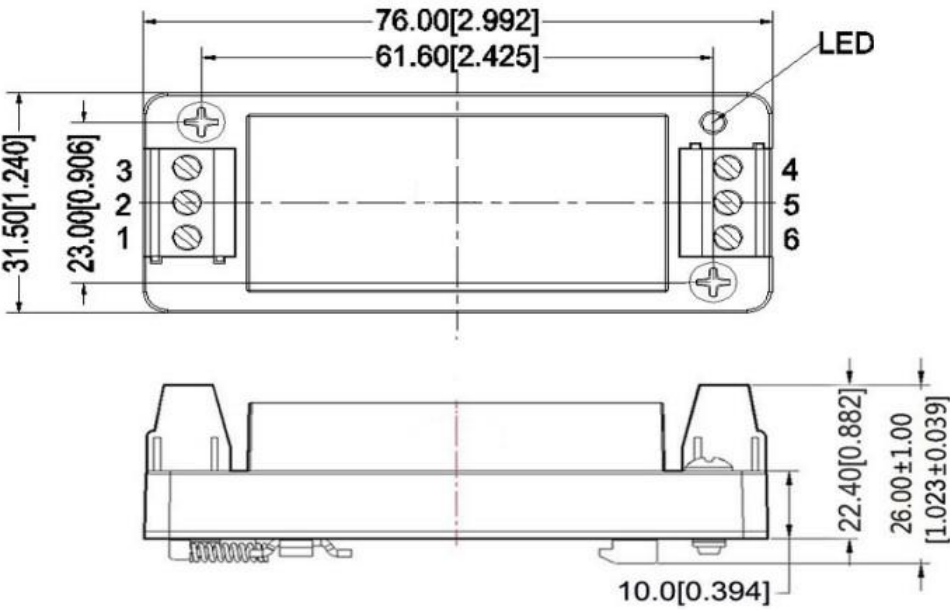

Note:
Unit: mm[inch]
Lead Wire size: 24-12AWG
Screwing torque: 0.4 N.m Max
General tolerance: ±1.00 [±0.039]

Terminal No.	1	2	3	4	5	6
PFD20-XXSXXB3(R)2	+Vin	-Vin	Ctrl	-Vo	Trim	+Vo

B3-TSH Dimensions (With Heat Sink)

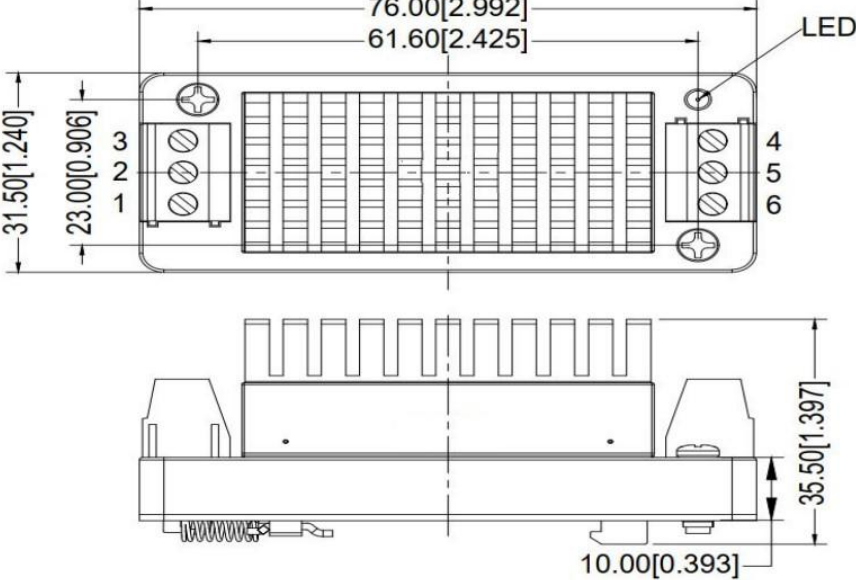

Note:
Unit: mm[inch]
Lead Wire Size: 24-12AWG
Screwing torque: 0.4 N.m Max
General tolerance: ±1.00 [±0.039]

Terminal No.	1	2	3	4	5	6
PFD20-XXSXXB3(R)2	+Vin	-Vin	Ctrl	-Vo	Trim	+Vo

Other Models Pin Function Definition

Pin No.	1	2	3	4	5	6
PFD20-XXSXXB3C2	+Vin	-Vin	Ctrl	-Vo	No pin	+Vo
PFD20-XXSXXB3N2	+Vin	-Vin	No pin	-Vo	No pin	+Vo

Application Notice

1. The products should be used according to the specifications in this datasheet, otherwise it could be permanently damaged.
2. It is not recommended to connect the converters in parallel to achieve a bigger power output.
3. The product performance in this datasheet cannot be guaranteed if it works at a lower load than the minimum load defined.
4. The product performance in this datasheet cannot be guaranteed if it works under over-load condition.
5. Unless otherwise specified, all values or indicators in this datasheet are tested at $T_a=25^{\circ}\text{C}$, humidity<75%RH, nominal input voltage and rated load (pure resistance load).
6. All values or indicators in this datasheet had been tested based on Aipupower test specifications.
7. The specifications are specially for the parts listed in this datasheet, any other non-standard model performances could be out of the specifications. Please contact our technician for specific requirements.
8. Aipupower can provide customization service.

Guangzhou Aipu Electron Technology Co., Ltd

Address: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, China.

Tel: 86-20-84206763 Fax: 86-20-84206762 HOTLINE: 400-889-8821

E-mail: sales@aipu-elec.com Website: <https://www.aipupower.com>