# **AIPUPOWER**®

## AC/DC Converter DA60-220SXXG2N3 Series



### **Typical Features**

- Wide input voltage range 85-265VAC/120-380VDC
- ◆ No load power consumption ≤ 0.45W
- Efficiency 85%(TYP.)
- ♦ Operating temperature from -40°C to 105°C
- Switching Frequency 65KHz
- Short circuit protection & Over current protection
- ◆ Isolation voltage 4000VAC
- ◆ Altitude during operation 4000m Max
- Compliant with IEC/EN62368/UL62368
- ♦ PCB DIP mounting



#### **Application Field**

**DA60-220SXXG2N3 Series** ----- Compact size & high efficiency modular power supplies with global adapted input voltage range (both AC & DC available), low ripple, low temperature rise, low standby power consumption, high efficiency, high reliability, safety isolated and good EMC performance. This series of products can be widely used in the fields of electric power, industrial, instrument, smart home devices, etc. The additional circuit for EMC is recommended in this data sheet for the application with high EMC requirement.

Typical Product List									
Certificate	Part No.	Output Specifications			Max	Ripple& Noise	Efficiency@		
		Power	Voltage		Capacitive	20MHz	Full Load, 220Vac		
				Current	Load	(Max)			
		(W)	Vo (V)	lo (mA)	uF	mVp-p	% (Тур.)		
-	DA60-220S12G2N3	60	12	5000	6000	120	85		
-	DA60-220S15G2N3	60	15	4000	4000	150	85		
-	DA60-220S48G2N3	60	48	1250	600	150	87		

Note 1 - The typical value of efficiency is based on the product tested after half an hour burn-in at full load.

Note 2 - The full load efficiency should be in ±2% of the typical value in this table. The efficiency is calculated by the way that the full output power is divided by the input power.

Note 3 - The ripple and noise are tested by the twisted pair method (Refer to the following Test Instructions in this datasheet).

Note 4 - Please contact with Aipu sales for other output voltages requirement in this series but no in this table.

Input Specifications	cifications						
ltem	Operating Condition	Min	Тур.	Max	Unit		
Input Voltago Pango	AC input	85	220	265	VAC		
Input Voltage Range	DC input	120	310	380	VDC		
Input Frequency range	-	47	50	63	Hz		
Input Current	115VAC	-	-	1.2	Δ		
input Cultent	220VAC	-	-	0.66	A		
Surge Current	115VAC	-	-	10	А		



## AC/DC Converter DA60-220SXXG2N3 Series



			220VAC	-		-	20		
No-load Power Consumption		motion	Input 115VAC -			-			10/
		mption	Input 220VAC			-	0.45		W
Leakage Current		ıt	-	0.5mA TYP/ 230VAC/ 50Hz					
Recommended External Fuse			-	3.15A/ 250VAC Time-delay fuse					
Hot Plug Remote Control			-	Unavailable					
			-				Unavailable		
Output Sp	oecificatio	ons							
	ltem		Operating Condition			Min	Тур.	Max	Unit
Voltage Accuracy		у	Full input voltage range, any load		Vo	-	±2.0	±3.0	%
Line Regulation		1	Rated load		Vo	-	-	±0.5	%
Load Regulation		ı	Nominal input voltage, 20%~100% load		Vo	-	-	±1.0	%
Minimum Load			Single Output			0	-	-	%
Turn on Delay Time			Input 115VAC (full load)			-	1500	-	mS
		ne -	Input 220VAC (full load)			-			
Power-off Holde Up Time			Input 115VAC (full load)			-	200		mS
		Time -	Input 220VAC (full load)			-	100		
Dynamic	Overshoo	ot range	25%~50%~25%			-5.0	-	+5.0	%
Response	Recover	ry time	50%~75%	50%~75%~50%			-	+5.0	mS
Output Overshoot		ot	Full input voltage range				%		
Short circuit Protection		tion				Contin	Hiccu		
Temperature Drift Coefficient		efficient				-	±0.03% -		%/°C
Over Current Protection		ction	Full input voltage range			≥130% lo, self-recovery			Hiccu
Ripple & Noise			Full input voltage range			-	50	150	mV
General S	pecificat	ions							
Item		Operating Condition		Min	Тур.	Max	Unit		
Switching Frequency		-	-			65	-	KHz	
Operating Temperature		Refer to the temperature derating curve			-40	-	+105	°C	
Storage Temperature			-			-40	-		+110
Soldering Temperature		atura	Wave soldering			260±4°C, time 5-10S			
		ature	Manual soldering			360±8℃, time 4-7S			
Relative Humidity		-			10	-	90	%RH	
Isolation Voltage I/P-O/P		Test 1min, leakage current ≤5mA			4000	-	-	VAC	
Insulation Resistance I/P-O/P		@ DC	@ DC500V			-	-	MΩ	
Saf	ety Standa	rd	-				EN62368/	IEC62368	


## Guangzhou Aipu Electron Technology Co., Ltd

Guangzhou Aipu Electron Technology Co., Ltd reserves the copyright and right of final interpretation.

AIPUPOWER

## AC/DC Converter DA60-220SXXG2N3 Series



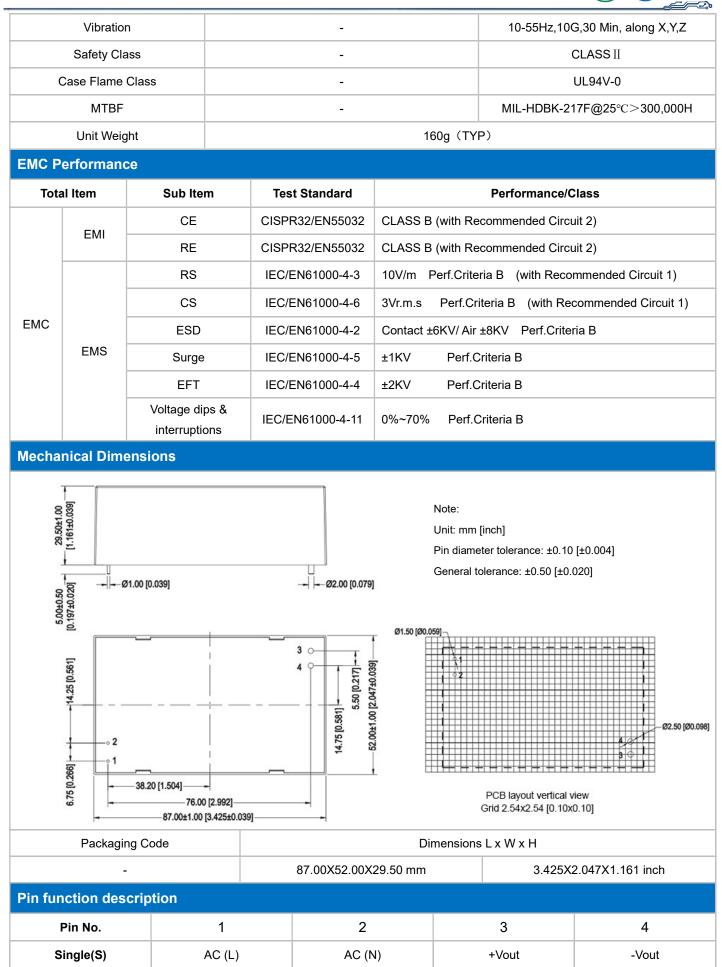

# AIPUPOWER®

## AC/DC Converter DA60-220SXXG2N3 Series



DPO(Probe exclude cap and earth wire)

Load power line

Load

Jig Plate

Power

module

30±2cm

pled twisted-pair wire


Input

#### Ripple & Noise Test Instruction (Twisted Pair Method, 20MHZ bandwidth)

1) The Ripple & noise test needs 12# twisted pair cables, an oscilloscope which bandwidth should be set to 20MHz, 0.1uF polypropylene capacitor and 10uF high-frequency low-resistance electrolytic capacitor are connected in parallel with the probes (100M bandwidth). The oscilloscope should be set at the Sample Mode.

2) The test diagram is shown on the right. The converter output connects to the electronic load by the jig with cables which size should be defined according to the output current value. The twisted pair (length  $30 \text{cm} \pm 2 \text{ cm}$ ) should be connected in parallel with the load, the location is as close as possible to the output pins or terminals. The test can be started after input power on.



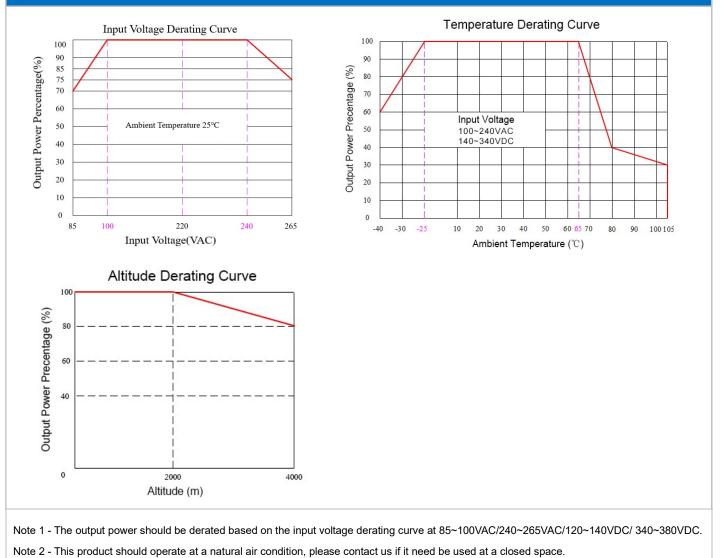


# **AIPUPUWER**®


## AC/DC Converter DA60-220SXXG2N3 Series



#### **Recommended Circuits for Application**

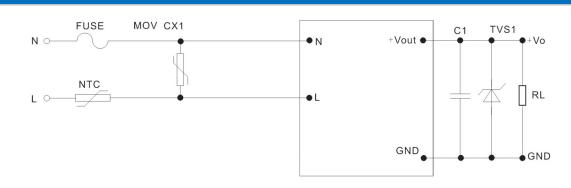



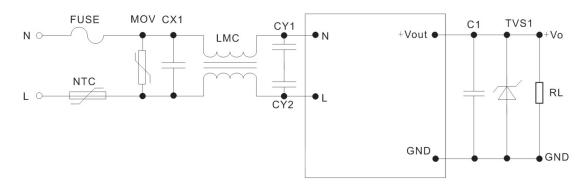

Circuit 2

Note:

1. 1µF ceramic SMD capacitor is recommended for the output filter capacitor C1 to suppress the high-frequency noise. The capacitor's withstand voltage should be derated to at least 80%.

2. TVS1 is recommended to protect the output circuit while the power supply operating at abnormal condition. 600W series TVS is recommended, SMBJ7.0A for 5V output, SMBJ12.0A for 9V output, SMBJ20A for 12V&15V output, SMBJ30.0A for 24V output and SMBJ64A for 48V output.

3. 10D561K/3500A is recommended for MOV which is used to protect the power supply against lightning surges.

4. The circuit #1 is recommended for the typical application, Circuit #2 is recommended for higher EMC requirements, following the components parameters.

- MOV 10D-561K/ 3500A
- NTC 10D-9
- CY1, CY2 Y1/102M/400VAC
- CX1 X2/104K/275VAC
- Common mode choke LMC 15mH-30mH/1.5A
- FUSE 3.15A/250V time-delay fuse (Necessary)

## AIPUPOWER



#### **Application Notice**

1. The products should be used according to the specifications in this datasheet, otherwise it could be permanently damaged.

- 2. A fuse should be connected at input.
- 3. The product performance in this datasheet cannot be guaranteed if it works at a lower load than the minimum load defined.
- 4. The product performance in this datasheet cannot be guaranteed if it works at over-load condition.

5. Unless otherwise specified, all values or indicators in this datasheet are tested at Ta=25°C, humidity<75%RH, nominal input voltage and rated load (pure resistance load).

6. All values or indicators in this datasheet had been tested based on Aipupower test specifications.

7. The specifications are specially for the parts listed in this datasheet, any other non-standard model performances could be out of the specifications. Please contact our technician for specific requirements.

8. Aipupower can provide customization service.

#### Guangzhou Aipu Electron Technology Co., Ltd

Address: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, China. Tel: 86-20-84206763 Fax: 86-20-84206762 HOTLINE: 400-889-8821 E-mail: sales@aipu-elec.com Website: https://www.aipupower.com