

Typical Product Features

- ◆ Fixed Voltage Input, Isolated unregulated output
- ◆ Conversion efficiency up to 85%
- ◆ Continuous short-circuit protection
- ◆ Meet enhanced isolation
- ◆ Small SIP Package
- ◆ Isolation voltage 5000Vac/6000Vdc
- ◆ Working temperature: -40°C ~ +105°C
- ◆ Plastic case, meet UL94 V-0 standard



Test conditions: Unless otherwise specified, all parameter tests are conducted at nominal input voltage, pure resistive rated load, and a room temperature environment of 25 °C.

Application

QAXX-XXR3 Series ---- is a DC-DC module power supply designed for IGBT drivers. It uses an asymmetric voltage output to minimize IGBT drive losses. It also has output short-circuit protection and self-recovery capabilities.

Product List

Part No.	Input Voltage Range (VDC)		Output Voltage/ Current(Vo/Io)		Input Current (mA) Nominal voltage		Max capacitive load	Ripple & Noise① (20MHZ bandwidth) Max./ Typ.	Efficiency (%) @output full load, input nominal voltage
	Nominal value	Range	Voltage (VDC) +Vo/-Vo	Current (mA) +Io/-Io	Full Load typ.	No-load typ.			
QA01-17R3	15	13.5	+17/-9	+80/-40	130	12	1000	150	80 85
QA01C-18R3		- 16.5	+18/-3	+100/-100	160	12	1000	150	80 85

Note: ① The ripple & noise test method uses the twisted pair method.

In order to ensure that the module can work efficiently and reliably, its minimum output load cannot be less than 10% of the rated load when in use. If the power you need is indeed small, please connect a resistor in parallel at the output end. The recommended resistance value is equivalent to 10% of the rated power.

Input Specifications

Item	working conditions		Min.	Typ.	Max.	Unit
Input impulse voltage (1sec. max.)	15Vdc Input		-0.7	--	21	Vdc
Input filter			Capacitive filter			
Hot Plug			Unavailable			

Output Specifications

Item	working conditions		Min.	Typ.	Max.	Unit
QA01-17R3	+Vo	Vin=15Vdc, Pin6 & Pin7 +Io= +80mA	15.98	16.9	17.68	Vdc
	-Vo	Vin=15Vdc, Pin5 & Pin6 -Io= -40mA	8.55	9.0	9.45	
QA01C-18R3	+Vo	Vin=15Vdc, Pin6 & Pin7 +Io= +100mA	16.92	17.87	18.72	Vdc
	-Vo	Vin=15Vdc, Pin5 & Pin6 -Io= -100mA	2.91	3.06	3.21	

Output Voltage Accuracy		See the error envelope curve (Figure 1)				
Load Regulation		10%~100% load	Positive output	--	8	15
			Negative output	--	10	15
Line Regulation		Input voltage change ±1%	Positive output	--	±1.2	±1.5
			Positive output	--	±1.2	±1.5
Temperature Drift Coefficient		100% Load		--	--	±0.03 %/°C
Output Short Circuit Protection		Continuous, self-recovery				


General Specifications

Items	Conditions	Min.	Typ.	Max.	Unit
Switching Frequency	Nominal input voltage full load	--	235	--	KHz
Operating Temperature	Use the reference temperature derating curve (Figure 2)	-40	--	+105	°C
Storage Temperature		-55	--	+125	
Shell temperature rise during work	Ta =25 °C	--	25	--	
Pin Withstand Soldering Temp	Distance to case 1.5mm, 10S	--	--	300	
Relative humidity	No condensation	5	--	95	%RH
Isolation Voltage	Input-Output, test 1min, leakage current<0.5mA	5000	--	--	Vac
		6000	--	--	Vdc
Insulation Resistance	Input-Output, insulation voltage 500Vdc	1000			MΩ
Isolation Capacitor	Input/Output,100KHz/0.1V	--	6	10	pF
Vibration		10-150Hz, 5G, 30 Min. along X, Y and Z			
MTBF	MIL-HDBK-217F@25°C	3500	--	--	K Hours
Case Material	Black flame-retardant heat-resistant Plastic(UL94 V-0)				
Product Weight	3.7g (Typ.)				
Cooling Method	Natural air cooling				
Packing Method	Tube(525*18*10mm)	25PCS			
	Minimum Carton(542*110*155mm)	1400PCS(Total 80 Tubes)			
Package Size	L x W x H	19.50×9.80×12.50mm		0.768 × 0.386 × 0.492inch	

Electromagnetic Compatibility Characteristics

EMI	CS	CISPR32/EN55032, CLASS B (EMC Recommended Circuit)		
	RS	CISPR32/EN55032, CLASS B (EMC Recommended Circuit)		
EMS	ESD	IEC/EN61000-4-2	Air±8kV, Contact±6kV	perf.Criteria B

Packing Dimension

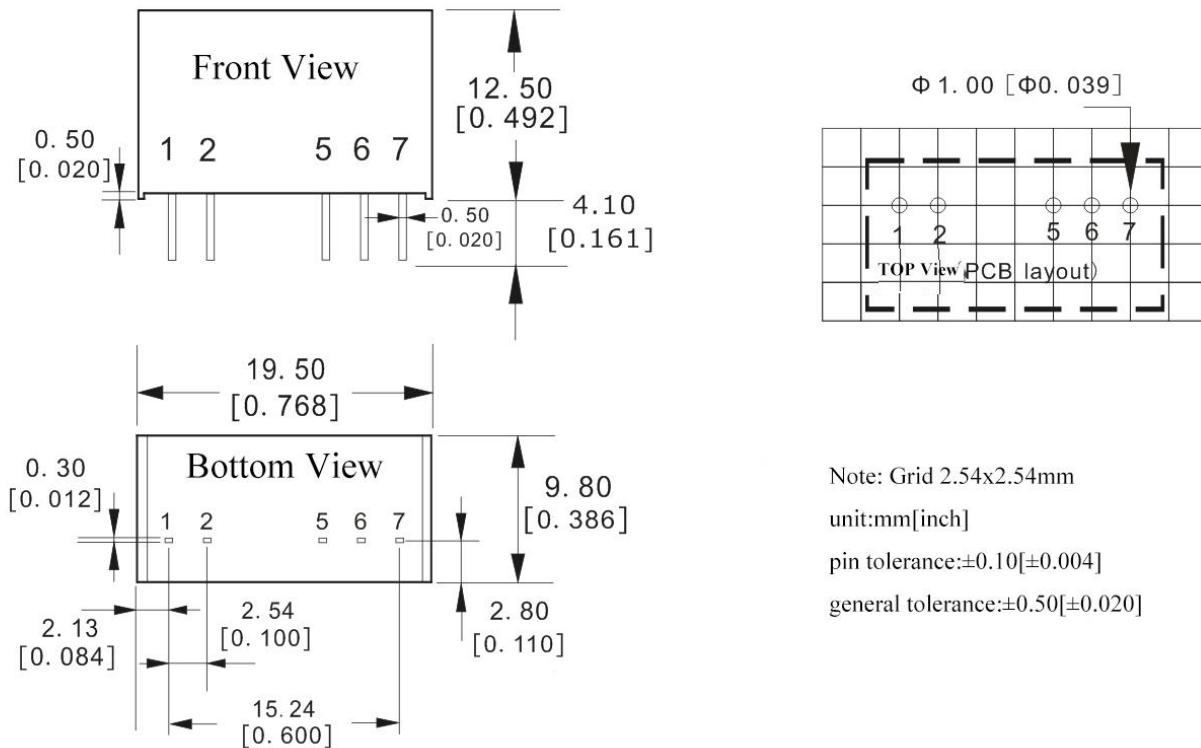

Pin Definition

Pin-Out	1	2	3	4	5	6
Single (S)	+Vin	GND	--	-Vo	--	+Vo
Dual (D)	+Vin	GND	--	-Vo	0V	+Vo

Note: if the definition of pin is not in accordance with the model selection manual, please refer to the label on actual item.


Ripple & Noise Test Instructions (Twisted Pair Method 20MHz Bandwidth)

Test Method:

1.12# twisted pair to connect, Oscilloscope bandwidth set as 20MHz, 100M bandwidth probe, terminated with 0.1uF polypropylene capacitor and 10uF high frequency low resistance electrolytic capacitor in parallel, oscilloscope set as Sample pattern.

2. Output Ripple& Noise Test Method:


Input terminal connect to power supply, output terminal connect to electronic load through jig plate, Use 30cm \pm 2 cm sampling line, Power line selected from corresponding diameter wire with insulation according to the flow of output current.

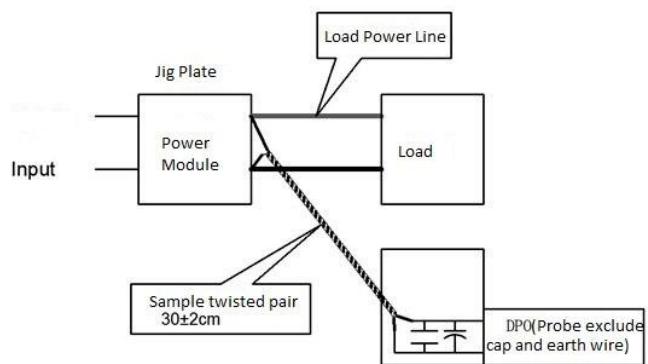

Product Characteristic Curve


QA01-17R3

Main road error envelope curve

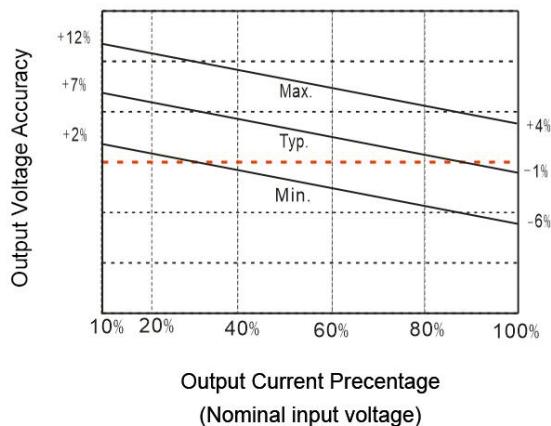


QA01-17R3

Auxiliary road error envelope curve

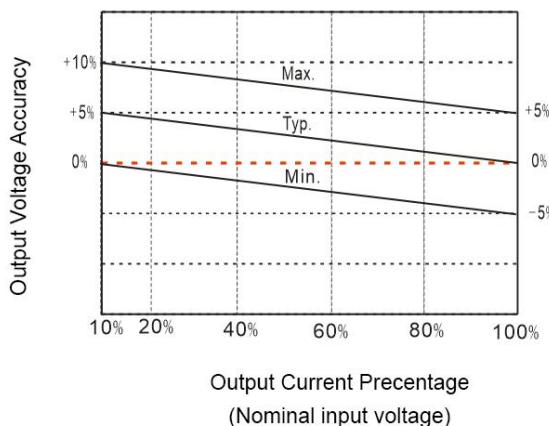

QA01C-18R3

Main road error envelope curve

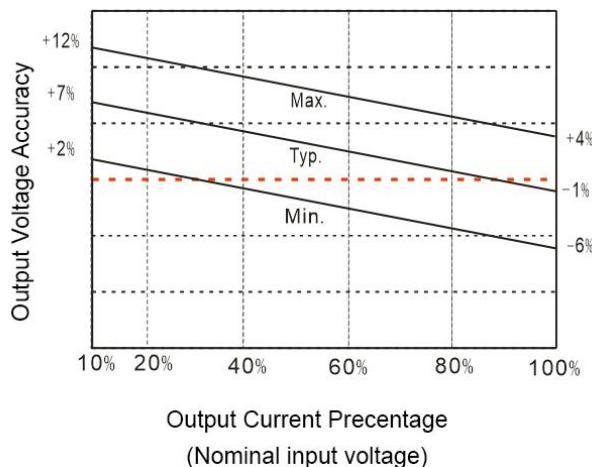

QA01C-18R3

Auxiliary road error envelope curve

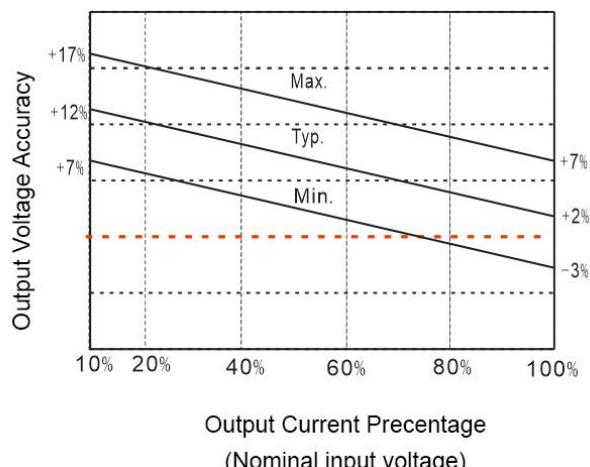


Figure 1

Temperature Derating Curve



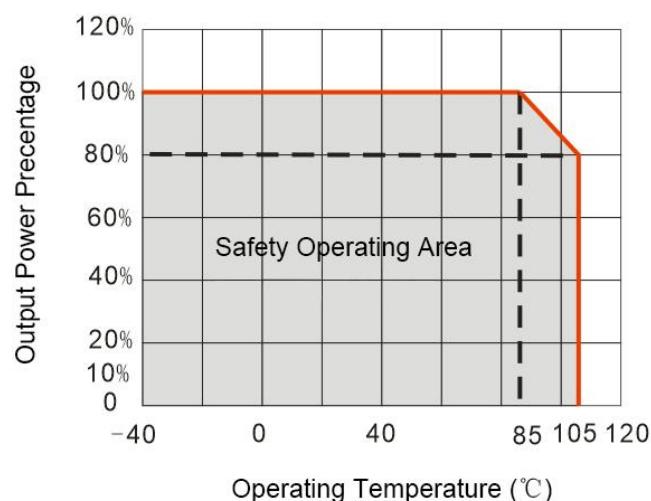


Figure 2


Design and Application Circuit Reference

(1) Test Method

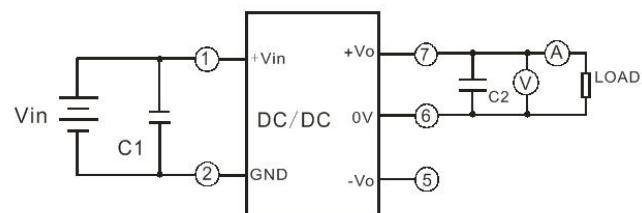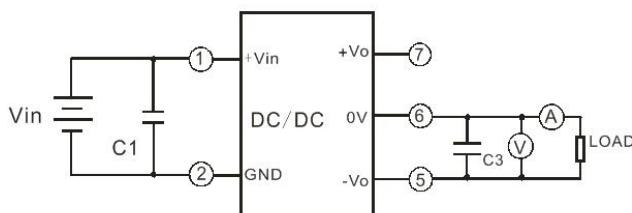


Note: C1,C2,C3 as 100μF/35V(Low internal resistance capacitor)

(2) Typical Application

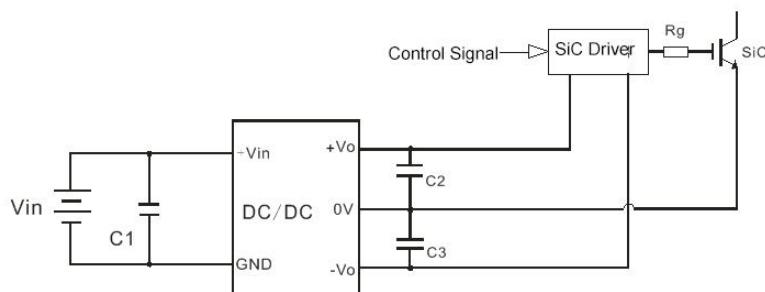


C1/C2/C3
100μF/35V (Low internal resistance capacitance)

(3) EMC typical recommended circuit

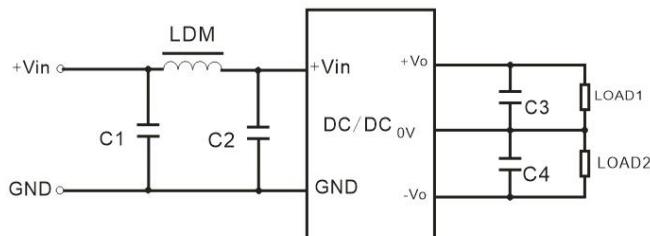

	Input voltage	5VDC	12/15/24VDC
EMI	C1/C2	4.7 μF/16V	1 μF/50V
	C3/C4	10 μF/50V	100 μF/30V
	LDM	6.8 μH	33 μH

Note: C3/C4 are low internal resistance capacitors

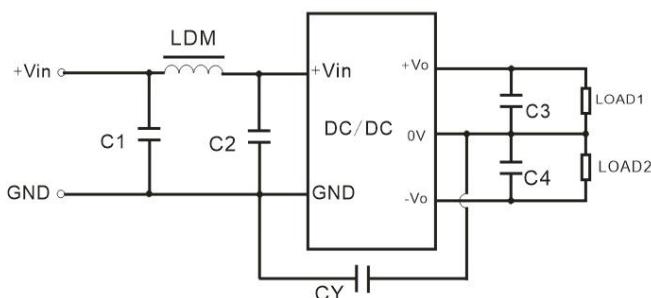

	Input voltage	5VDC	12/15/24VDC
EMI	C1/C2	4.7 μF/16V	1 μF/50V
	C3/C4	10 μF/50V	100 μF/30V
	LDM	6.8 μH	33 μH
	CY	330pF	330pF

Note: C3/C4 are low internal resistance capacitors

EMC Recommended Circuit

Note:

1. This product cannot be used in parallel and does not support hot plugging;
2. The connection line between the module power supply and the IGBT driver should be as short as possible;
3. The output filter capacitor (low internal resistance electrolytic capacitor) should be close to the module power supply and the IGBT driver;
4. The average output power of the driver must be less than the output power of the power module;
5. It is recommended to use ceramic capacitors or electrolytic capacitors for external capacitors at the input or output of the product. Tantalum capacitors are not recommended, otherwise there will be a certain risk of failure;
6. If the product works below the minimum required load, it cannot be guaranteed that the product performance meets all the performance indicators in this manual;
7. All indicator test methods in this article are based on the company's corporate standards;
8. Product specifications are subject to change without prior notice.

Guangzhou Aipu Electron Technology Co., Ltd

Address: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, China.

Tel: 86-20-84206763 Fax: 86-20-84206762 HOTLINE: 400-889-8821

E-mail: sales@aipu-elec.com Website: <https://www.aipupower.com>