



## Typical Features

- ◆ Wide input voltage range 4:1
- ◆ Efficiency up to 88%
- ◆ Low standby power consumption
- ◆ Operating Temperature from -40°C to +105°C
- ◆ High isolation voltage 2100VDC(input-output) & 2100VDC(input-case)
- ◆ Input under voltage protection, output over voltage, short circuit, over current and over temp. protections
- ◆ Standard 1/4 brick size

### Conform to CE

**ZCD120-24S12A** is a High-performance DC-DC converter with rated input voltage 24VDC (full range from 9V to 36VDC), regulated single output 12V/120W without minimum load limit. It has the advantages of high isolation voltage, Max operating temperature 105°C, with input under-voltage protection, output over-current, over-voltage, over-temperature and short circuit protections, input remote control, output voltage distal end compensation and output voltage Trim, etc.

### Typical Product List

| Part No.         | Input voltage range (VDC) | Output power (W) | Output voltage (VDC) | Output current (A) | Ripple & Noise (mVp-p) | Full load efficiency (%) Min/Typ. | Remarks                 |
|------------------|---------------------------|------------------|----------------------|--------------------|------------------------|-----------------------------------|-------------------------|
| ZCD120-24S12AC   | 9 - 36                    | 120              | 12                   | 10                 | 120                    | 86/88                             | Standard Positive logic |
| ZCD120-24S12AN   |                           |                  |                      |                    |                        |                                   | Standard Negative logic |
| ZCD120-24S12AC-H |                           |                  |                      |                    |                        |                                   | Heatsink Positive logic |
| ZCD120-24S12AN-H |                           |                  |                      |                    |                        |                                   | Heatsink Negative logic |

Note - The output power could be derated linearly at the input voltage range of 9-18V, the Max output power can be 100W at input voltage 9V.

### Input Specifications

| Item                              | Operating conditions   | Min. | Typ. | Max. | Unit                   |
|-----------------------------------|--|------|------|------|------------------------|
| Max input current                 | Input voltage 9V, output 100W  | --   | --   | 15   | A                      |
| No load input current             | Rated input voltage  | --   | --   | 70   | mA                     |
| Input Inrush voltage (1sec. max.) | The unit could be permanently damaged by input over this voltage   | -0.7 | --   | 50   | VDC                    |
| Start-up voltage                  |  | --   | --   | 10   |                        |
| Input under voltage protection    | With No-load (over current protection will start in advance at full load)  | --   | --   | 9    |                        |
| Remote Control (CNT)              | Positive logic - CNT no connection or connect to 3.5-15V to turn on, connect to 0-1.2V to shut off the converter |      |      |      | Reference voltage -Vin |
|                                   | Negative logic - CNT no connection or connect to 3.5-15V to shut off, connect to 0-1.2V to turn on the converter |      |      |      |                        |

**Output Specifications**

| Item   | Operating conditions                      | Min.                              | Typ. | Max.  | Unit  |
|--|---|-----------------------------------|------|-------|-------|
| Output Voltage Accuracy                        | Nominal input voltage, 0% -100% load      | --                                | ±0.2 | ±1.0  | %     |
| Line Regulation                                | Full load, input voltage from low to high | --                                | ±0.2 | ±0.5  |       |
| Load Regulation                                | Nominal input voltage, 10%-100% load      | --                                | ±0.2 | ±0.5  |       |
| Transient recovery time                        | 25% load step change (step rate 1A/50uS)  | --                                | 200  | 250   | uS    |
| Transient Response Deviation                   |   | -5                                | --   | +5    | %     |
| Temperature Drift Coefficient                  | Full load                                 | -0.02                             | --   | +0.02 | %/°C  |
| Ripple & Noise                                 | 20M bandwidth, test with capacitor ≥470uF | --                                | 100  | 120   | mVp-p |
| Output voltage adjustment (TRIM)               |   | -20                               | --   | +10   | %     |
| Output voltage distal end compensation (Sense) |   | --                                | --   | +5    | %     |
| Over temperature protection                    | Maximum temperature of the metal base     | 105                               | 115  | 125   | °C    |
| Over voltage protection                        |   | 125                               | --   | 140   | %     |
| Over current protection                        |   | 13.7                              | --   | 17.5  | A     |
| Short circuit protection                       |   | Hiccup, continuous, self-recovery |      |       |       |

**General Specifications**

| Item                  | Operating conditions | Min.                             | Typ. | Max. | Unit       |
|-----------------------|----------------------|----------------------------------|------|------|------------|
| Isolation Voltage     | I/P-O/P              | Test 1min, leakage current < 3mA | --   | --   | 2100 VDC   |
|                       | I/P-Case             | Test 1min, leakage current < 3mA | --   | --   | 2100 VDC   |
|                       | O/P-Case             | Test 1min, leakage current < 3mA | --   | --   | 500 VDC    |
| Insulation resistance | I/P-O/P              | @ 500VDC                         | 100  | --   | -- MΩ      |
| Switching frequency   |                      |                                  | --   | 250  | -- KHz     |
| MTBF                  |                      |                                  | 150  | --   | -- K hours |

**Environmental characteristics**

| Item                      | Operating conditions                       | Min.                                 | Typ. | Max. | Unit |  |
|---------------------------|--|--------------------------------------|------|------|------|--|
| Operating Temperature     | Refer to the temperature derating curve    | -40                                  | --   | +105 | °C   |  |
| Storage Humidity          | No condensing                              | 5                                    | --   | 95   | %RH  |  |
| Storage Temperature       |  | -40                                  | --   | +125 | °C   |  |
| Pin Soldering temperature | 1.5mm from the case, soldering time < 1.5S | --                                   | --   | +350 |      |  |
| Cooling requirement       |  | EN60068-2-1                          |      |      |      |  |
| Dry heat requirement      |  | EN60068-2-2                          |      |      |      |  |
| Damp heat requirement     |  | EN60068-2-30                         |      |      |      |  |
| Shock and vibration       |  | IEC/EN 61373 C1/Body Mounted Class B |      |      |      |  |


**EMC Performances**

|     |       |                                   |                                 |                  |
|-----|-------|-----------------------------------|---------------------------------|------------------|
| EMI | CE    | EN50121-3-2                       | 150kHz-500kHz 79dBuV            |                  |
|     |       | EN55016-2-1                       | 500kHz-30MHz 73dBuV             |                  |
|     | RE    | EN50121-3-2                       | 30MHz-230MHz 40dBuV/m at 10m    |                  |
|     |       | EN55016-2-1                       | 230MHz-1GHz 47dBuV/m at 10m     |                  |
| EMS | ESD   | IEC/EN61000-4-2/GB/T 17626.2-2006 | Contact ±6kV/Air ±8kV           | perf. Criteria A |
|     | RS    | IEC/EN61000-4-3/GB/T 17626.3-2006 | 10V/m                           | perf. Criteria A |
|     | EFT   | IEC/EN61000-4-4/GB/T 17626.4-2008 | ±2kV 5/50ns 5kHz                | perf. Criteria A |
|     | Surge | IEC/EN61000-4-5/GB/T 17626.5-2008 | Line to line ± 1kV (42Ω, 0.5μF) | perf. Criteria A |
|     | CS    | IEC/EN61000-4-6/GB/T 17626.6-2008 | 0.15MHz-80MHz 10 Vr.m.s         | perf. Criteria A |

**Physical Characteristics**

|                |   |
|----------------|---|
| Case Materials | Metal bottom shell + plastic case in black, flame class UL94 V-0        |
| Heat sink      | Dimension 61.0x39.0x15.0 mm, weight 52g, aluminum alloy, anodized black |
| Cooling method | Conduction cooling or forced air cooling with fan                       |
| Unit Weight    | Standard 72g, with heatsink 125g  |




## Mechanical Dimensions and Pin-Out description

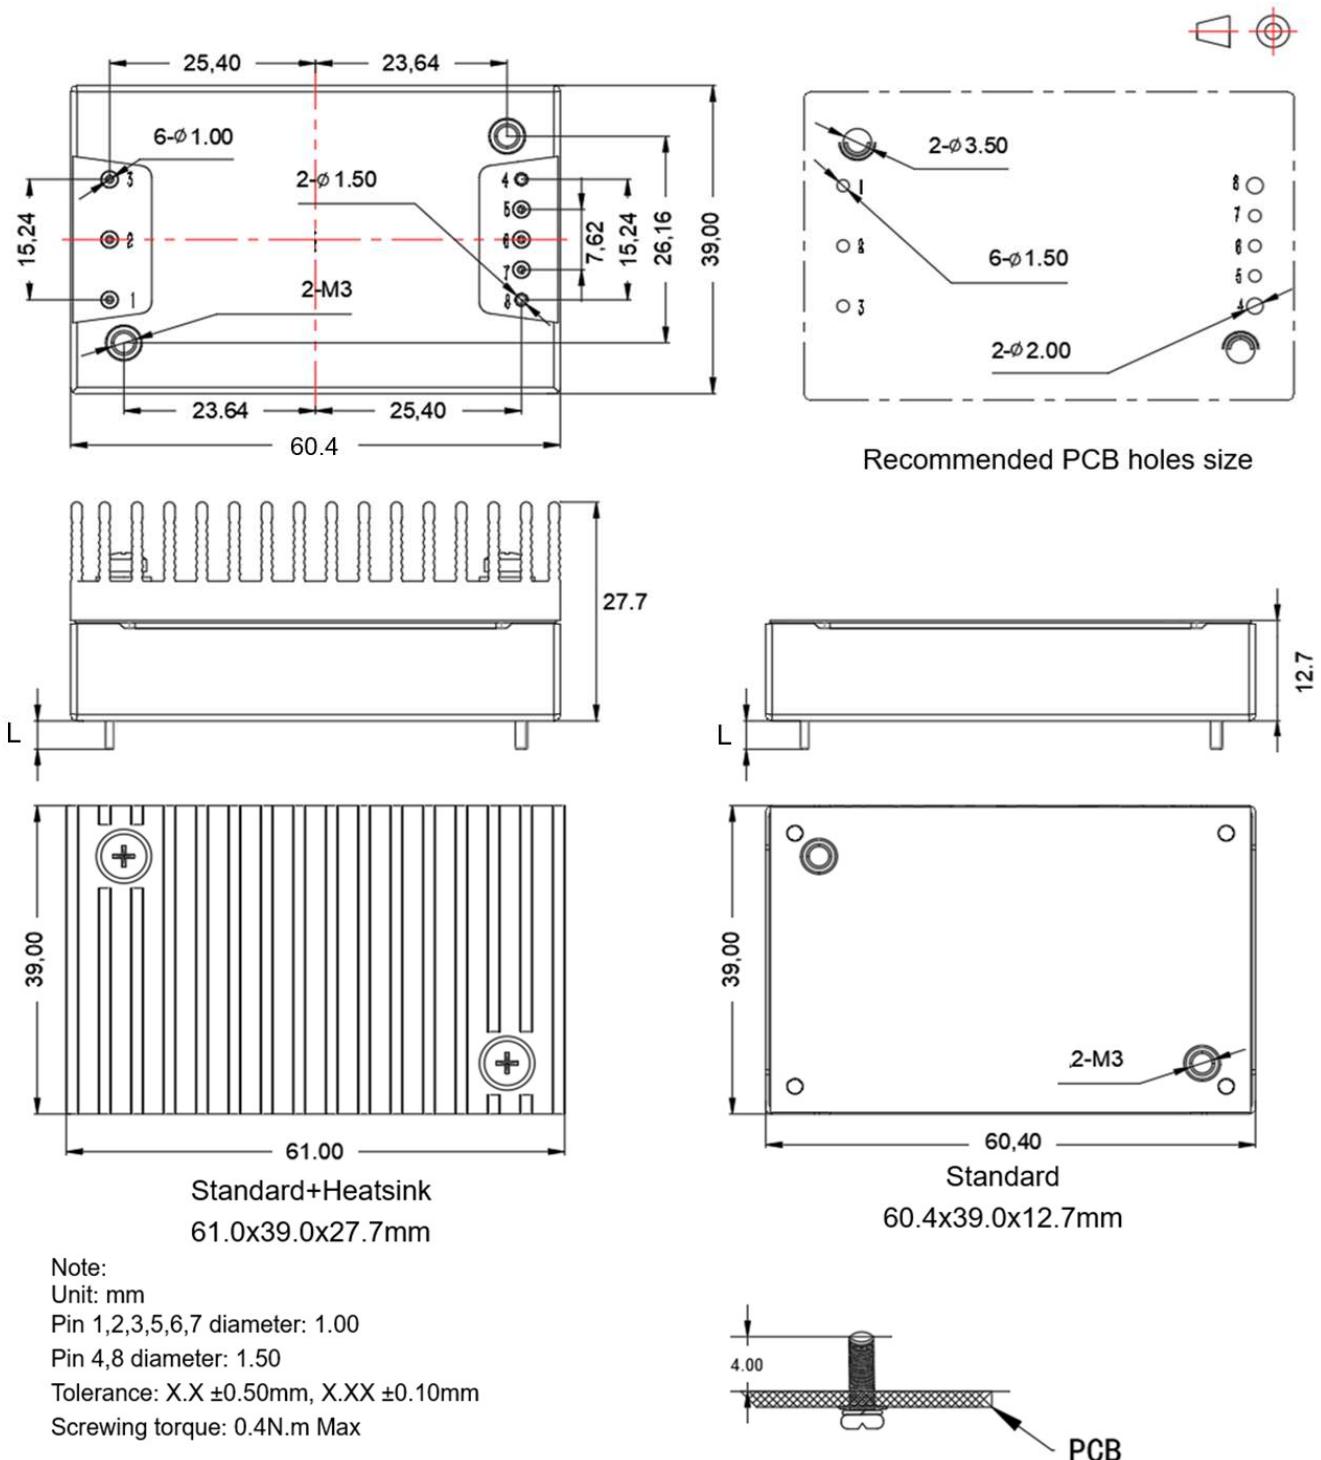

Pin length L=3.7mm

| No.         | 1        | 2              | 3        | 4         | 5                                 | 6                   | 7                                 | 8         |
|-------------|----------|----------------|----------|-----------|-----------------------------------|---------------------|-----------------------------------|-----------|
| Pin-out     | Vin+     | CNT            | Vin-     | Vout-     | -Sense                            | TRIM                | +Sense                            | Vout+     |
| Description | Input V+ | Remote Control | Input V- | Output V- | Output distal end compensation S- | Output Voltage Trim | Output distal end compensation S+ | Output V+ |

## Product Performance Curves

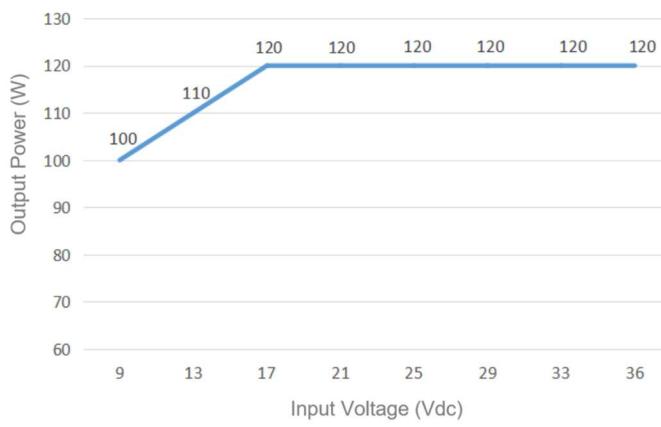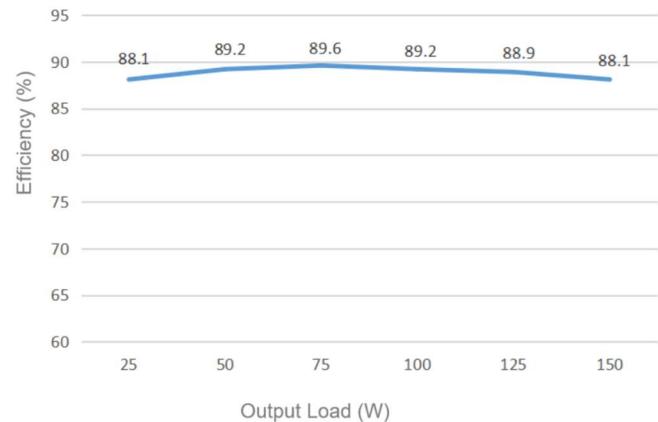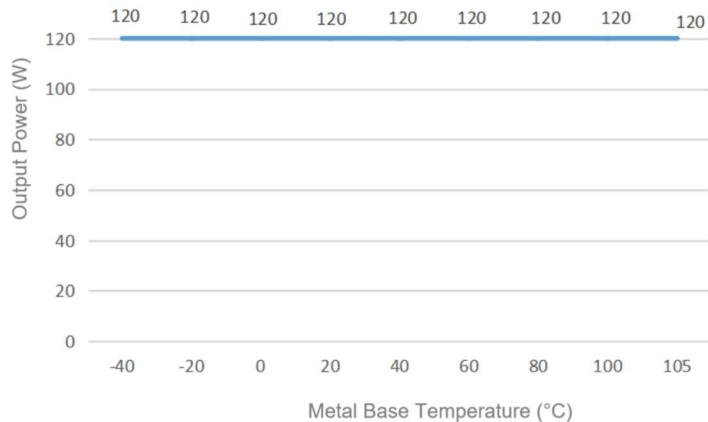


## Note:

1. The output power and the efficiency in the curves are tested with typical values.
2. The data in temperature derating curve is tested at Aipu laboratory test conditions. It is recommended to keep the temperature of the Metal base not more than 100 °C while the converter operates at the rated load for the customer application.

## Recommended circuits for application

## 1. Ripple and Noise


All this series of converters will be tested according to the circuit below before shipping.

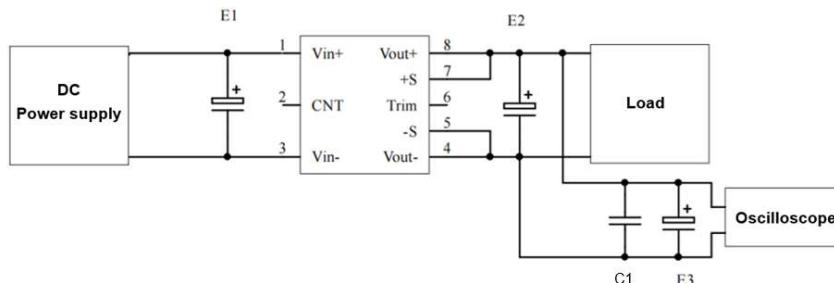

| Output Volt. | Capacitance | E1 (μF) | E2 (μF) | C1 (μF) | E3 (μF) |
|--------------|-------------|---------|---------|---------|---------|
| 3.3VDC       | 100         | 100     | 1000    | 1       | 10      |
| 5VDC         |             |         | 680     |         |         |
| 12VDC        |             |         | 220     |         |         |
| .....        |             |         | .....   |         |         |
| 48VDC        |             |         | 68      |         |         |
| .....        |             |         | 68      |         |         |
| 110VDC       |             |         | .....   |         |         |


## 2. Typical application circuit

If this circuit recommended below is not adopted, please connect an electrolytic capacitor  $\geq 100 \mu\text{F}$  in parallel at the input to suppress the possible surge voltage.

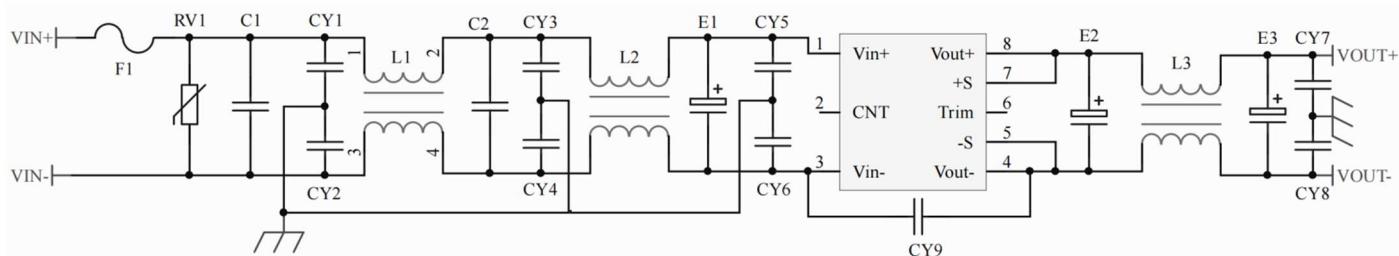


|                              |  |
|------------------------------|--|
| F1                           | T25A/63V Time-delay fuse                     |
| RV1                          | 14D 63V Varistor                             |
| C1, C2                       | 105/63V Polyester Film Capacitor             |
| CY1, CY2, CY3, CY4, CY5, CY6 | 472/250Vac Y2 capacitor                      |
| CY7, CY8                     | 103/2KV Ceramic Capacitor                    |
| CY9                          | 471/250Vac Y2 capacitor                      |
| E1                           | 220μF/63V Electrolytic Capacitor             |
| E2, E3                       | 470μF16V Low ESR Capacitor                   |
| L1,L2                        | >1mH, temperature rise less than 25°@15A     |
| L3                           | >220uH, temperature rise less than 25°@12.5A |

### 3. Remote control (CNT) application

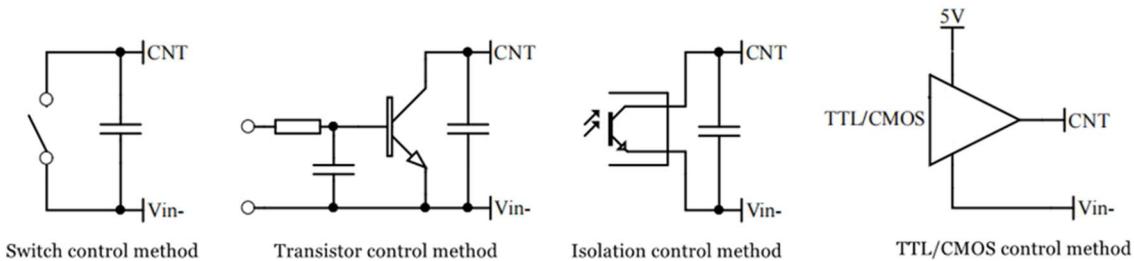

### 4. Application for Sense


#### 1) With NO distal end compensation

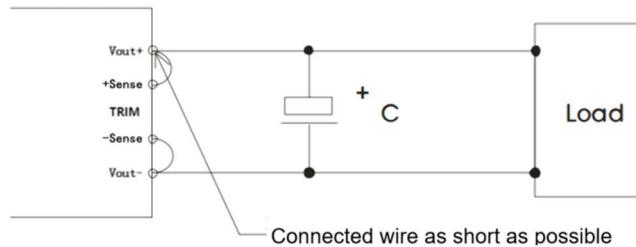

Notes:

1. V<sub>out</sub>+ & Sense+, V<sub>out</sub>- & Sense- should be shorted when distal compensation is not needed
2. The lead wire between V<sub>out</sub>+ and Sense+, V<sub>out</sub>- and Sense- should be as short as possible, and close to the pins, or else the output may be unstable.

#### 2) With distal end compensation

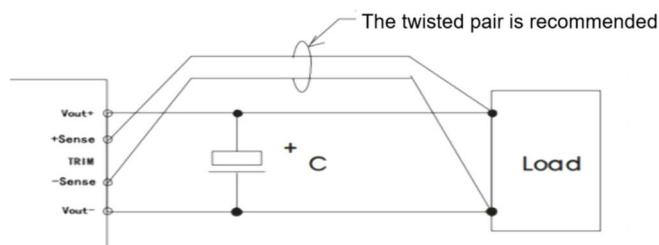

Notes:


1. The output voltage may be unstable if the compensation cables are too long.
2. The Twisted pair or shielded cables are recommended, the cable length should be as short as possible.
3. Wide copper path on PCB or thick lead wires between the power supply and the load should be used to achieve the line voltage drop <0.3V. The target is to keep output voltage within the specified range.
4. The leads wire resistance may create the output voltage oscillation or larger ripples. Please verify it before to use.

### 5. TRIM & TRIM resistance calculation


The calculation of  $\Delta U$  and R<sub>up</sub> & R<sub>down</sub>:

$$R_{up}=31/\Delta U-5.1(K\Omega)$$

$$R_{down}=12.4*(12-2.5-\Delta U)/\Delta U - 5.1(K\Omega)$$



Voltage-up: Add R<sub>up</sub> between  
Trim and V<sub>out</sub>-



Voltage-down: Add R<sub>down</sub>  
between Trim and V<sub>out</sub>+

6. This converter is not available for connection in parallel to increase the output power. Please contact Aipu technician for this kind of requirement.

### Others

1. The product warranty period is two years. The failed product can be repaired/replaced free of charge if it operates at normal condition. A paid service shall be also provided if the product failed after operating under wrong or unreasonable conditions.
2. Aipupower can provide customization design and filter modules for matching, please contact our technician for details.

### Guangzhou Aipu Electron Technology Co., Ltd

Address: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, China.

Tel: 86-20-84206763    Fax: 86-20-84206762    HOTLINE: 400-889-8821

E-mail: sales@aipu-elec.com    Website: www.aipupower.com