

Typical Features

- ◆ Wide input voltage range 85-305VAC/120-430VDC
- ◆ Efficiency 89%(typical)
- ◆ No load power consumption $\leq 0.3W$
- ◆ Operating temperature from $-40^{\circ}C$ to $+85^{\circ}C$
- ◆ Output short circuit, over current, over voltage protections
- ◆ Isolation Voltage 4200Vac
- ◆ Altitude during operating 5000m Max
- ◆ Compliance with IEC/EN62368/UL62368
- ◆ PCB mounting



Application Field

FA40-220SXXG2N5 Series ----- Compact size & high efficiency power supplies provided by Aipu. This series of products have the advantages of global adapt input voltage range for both AC and DC available, low ripple, low temperature rise, low standby power consumption, high efficiency & reliability, safety isolated and good EMC performance. Conforming to EMC & Safety standards IEC/EN55032, 61000 & 62368. The products can be widely used in the fields of Electric power, Industry, Instrument and Smart home devices, etc. The additional circuit for EMC is recommended in this data sheet for the application with higher EMC requirement.

Typical Product List

| Certificate | Part No. | Output Specification | | | Max Capacitive Load (220 Vac) | Ripple & Noise 20MHz (Max) | Efficiency @full load, 220Vac |
|-------------|-----------------|----------------------|---------|----------|-------------------------------|----------------------------|-------------------------------|
| | | Power | Voltage | Current | | | |
| | | (W) | Vo (V) | Io (m A) | | | |
| - | FA40-220S12G2N5 | 40 | 12 | 3330 | 4400 | 150 | 89 |
| - | FA40-220S24G2N5 | 40 | 24 | 1670 | 1500 | 150 | 89 |

Note 1 - Please contact Aipu sales for other output voltages requirement in this series but not listed in this table.

Note 2 - The typical value of efficiency is based on the product tested after half an hour burn-in at full load.

Note 3 - The full load efficiency should be in $\pm 2\%$ of the typical value in this table. The efficiency is calculated by the way that the full output power is divided by the input power.

Input Specifications

| Items | Operating Conditions | Min. | Typ. | Max. | Unit |
|---------------------------|----------------------|------------------------------|------|------|------|
| Input Voltage Range | AC input | 85 | 220 | 305 | VAC |
| | DC input | 120 | 310 | 430 | VDC |
| Input Frequency Range | - | 47 | 50 | 63 | Hz |
| Input Current | 115VAC | - | - | 1.0 | A |
| | 220VAC | - | - | 0.7 | |
| Surge Current | 115VAC | - | 30 | - | |
| | 220VAC | - | 60 | - | |
| Leakage Current | - | 0.5mA TYP/230VAC/50Hz | | | |
| Recommended External Fuse | - | 3.15A/300VAC Time-delay fuse | | | |
| Hot Plug | - | Unavailable | | | |
| Remote Control | - | Unavailable | | | |


| Output Specifications | | | | | | | |
|---------------------------|-----------------|---|----|---------------------------|--------|-------|--------|
| Items | | Operating Conditions | | Min. | Typ. | Max. | Unit |
| Voltage Accuracy | | Full input voltage range, any load | Vo | - | ±2.0 | ±3.0 | % |
| Line Regulation | | Rated load | Vo | - | - | ±1.0 | % |
| Load Regulation | | Rated input voltage, 20%~100% load | Vo | - | - | ±1.5 | % |
| No Load Power Consumption | | Input 115VAC | | - | - | 0.30 | W |
| | | Input 220VAC | | - | - | | |
| Minimum Load | | Single Output | | 0 | - | - | % |
| Turn-on Delay Time | | Rated input voltage (full load) | | - | 50 | - | mS |
| Power-off Holding Time | | Input 115VAC (full load) | | - | 50 | - | mS |
| | | Input 220VAC (full load) | | - | 100 | - | |
| Dynamic Response | Overshoot range | 25%~50%~25% | | - 5.0 | - | + 5.0 | % |
| | Recovery time | 50%~75%~50% | | - | 5.0 | - | mS |
| Output Overshoot | | Full input voltage range | | ≤10%Vo | | | % |
| Short-Circuit Protection | | | | Continuous, self-recovery | | | Hiccup |
| Drift Coefficient | | - | | - | ±0.03% | - | %/°C |
| Over-current Protection | | Input 220VAC | | ≥130% Io, self-recovery | | | Hiccup |
| Ripple & Noise | | Full input voltage range | | - | 60 | 150 | mV |
| | | Note – Please refer to the following ripple and noise test instruction (the twisted pair method). | | | | | |

| General Specifications | | | | | | | |
|------------------------|-----------|---|--|-----------------------------------|------|------|------|
| Items | | Operating Conditions | | Min. | Typ. | Max. | Unit |
| Switching Frequency | | - | | - | 65 | - | KHz |
| Operating Temperature | | Refer to the temperature derating curve | | -40 | - | +85 | °C |
| Storage Temperature | | - | | -40 | - | +105 | |
| Soldering Temperature | | Wave soldering | | 260±4°C, timing 5-10S | | | |
| | | Manual soldering | | 360±8°C, timing 4-7S | | | |
| Relative Humidity | | - | | 10 | - | 90 | %RH |
| Isolation Voltage | I/P - O/P | Test 1min, leakage current≤5mA | | 4200 | - | - | VAC |
| Insulation Resistance | I/P - O/P | @DC500V | | 100 | - | - | MΩ |
| Safety Standard | | - | | IEC/EN62368 | | | |
| Vibration | | - | | 10-55Hz, 10G, 30 Min, along X,Y,Z | | | |
| Safety Class | | - | | CLASS II | | | |
| Flame Class of Case | | - | | UL94V-0 | | | |
| MTBF | | - | | MIL-HDBK-217F@25°C > 2,799,000H | | | |
| Product Weight | | Part No. | | Weight (Typ.) | | | |
| | | FA40-220S12G2N5 | | 120g | | | |
| | | FA40-220S24G2N5 | | 120g | | | |


EMC Performance

| Total Items | Sub Items | Standard | Performance/Class |
|-------------|-----------|------------------------------|--|
| EMC | EMI | CE | CISPR32/EN55032 CLASS B (with Recommended Circuit 1) |
| | | RE | CISPR32/EN55032 CLASS B (with Recommended Circuit 1) |
| | EMS | RS | IEC/EN61000-4-3 10V/m Perf.Criteria B (with Recommended Circuit 1) |
| | | CS | IEC/EN61000-4-6 3Vr.m.s Perf.Criteria B (with Recommended Circuit 1) |
| | | ESD | IEC/EN61000-4-2 Contact ±6KV / Air ±8KV Perf.Criteria B |
| | | Surge | IEC/EN61000-4-5 Line to line ±2KV / line to ground ±4KV Perf.Criteria B (with Recommended Circuit 1) |
| | | EFT | IEC/EN61000-4-4 ±2KV Perf.Criteria B |
| | | Voltage dips & interruptions | IEC/EN61000-4-11 0%~70% Perf.Criteria B |

Mechanical Dimensions

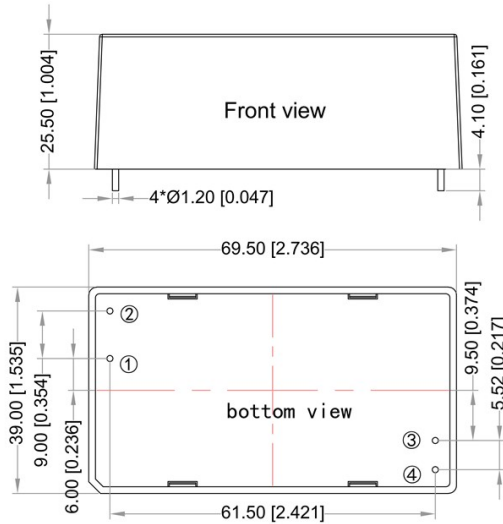

Unit: mm[inch]
Grid: 2.54x2.54[1.0x1.0]
General tolerance: ±0.5[±0.020]
Pin diameter tolerance: ±0.1[±0.004]

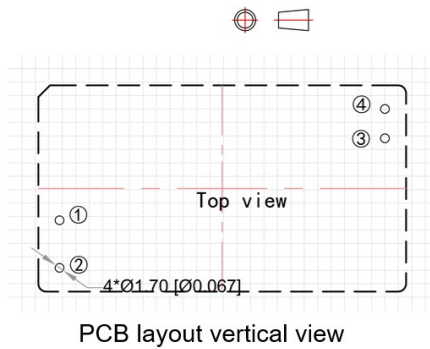


| Pin No. | Function |
|---------|----------|
| 1 | AC(L) |
| 2 | AC(N) |
| 3 | -Vo |
| 4 | +Vo |

| Packing Code | L x W x H | |
|--------------|--------------------------|----------------------------|
| - | 69.50 X 39.00 X 25.50 mm | 2.736 X 1.535 X 1.004 inch |


Ripple & Noise Test Instructions (Twisted Pair Method, 20MHz Bandwidth)

1) Ripple noise test need 12# twisted pair cables, an oscilloscope which bandwidth should be set to 20MHz, 0.1uF polypropylene capacitor and 10uF high-frequency low-resistance electrolytic capacitor are connected in parallel with the probes (100M bandwidth). The oscilloscope should be set at the Sample Mode.

2) The output ripple noise test diagram is shown on the right. The converter output connects to the electronic load by the jig with cables which size should be defined according to the output current value. The twisted pair (length 30cm±2 cm) should be connected in parallel with the load, the location is as close as possible to the output pins or terminals. The test can be started after input power on.

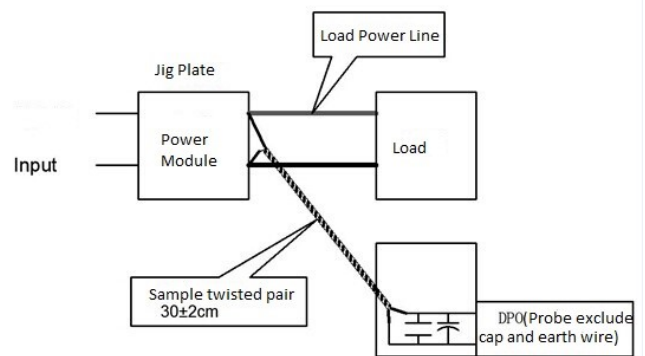


Product Performance Curve

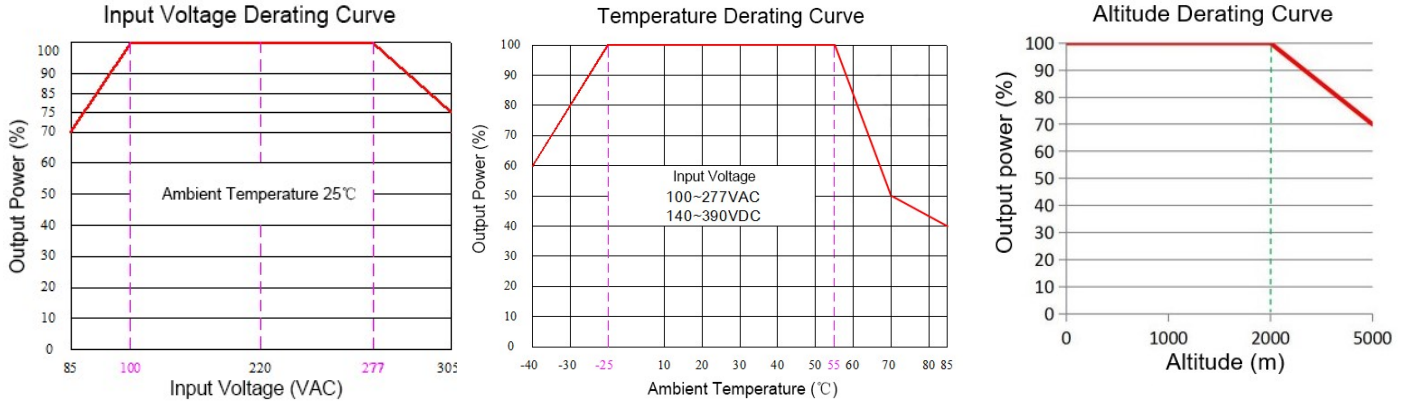

Note 1 - The output power should be derated based on the input voltage derating curve at 85~100VAC/277~305VAC/120~140VDC/390~430VDC.

Note 2 - This product should operate at a natural air condition, please contact us if it need be used at a closed space.

Recommended EMC Circuit for Application

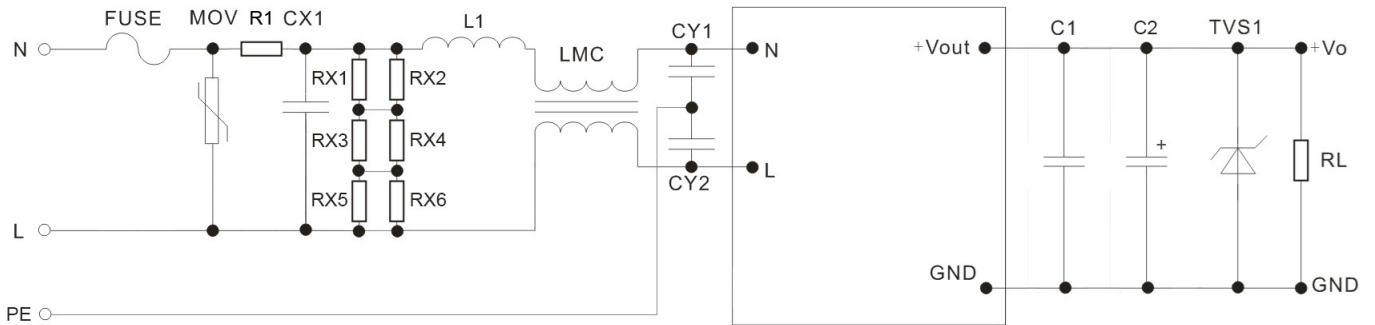

Circuit 1

| Component No. | FA40-220S12G2N5 | FA40-220S24G2N5 |
|------------------------------|--------------------------------|-----------------|
| FUSE (Necessary) | 3.15A/300V (Time-delay fuse) | |
| MOV | 14D561K/4500A | |
| R1 (Necessary) | 4.7Ω /3W (Wire-wound resistor) | |
| CX1 | X2, 334K/305VAC | |
| RX1, RX2, RX3, RX4, RX5, RX6 | 1206/1.0M | |
| L1 | 1.2mH/1A | |
| LMC | 20mH/1A | |
| CY1, CY2 | Y1/ 1nF/ 400VAC | |
| C1 | 1uF/ 50V | |
| C2 | 330uF/16V | 100uF/35V |
| TVS1 | SMBJ20.0A | SMBJ30.0A |

Application Notice

1. The products should be used according to the specifications in this manual, otherwise it could be permanently damaged.
2. A fuse should be connected at input.
3. The product performance in this manual cannot be guaranteed if it works at a lower load than the minimum load defined.
4. The product performance in this manual cannot be guaranteed if it works at over-load condition.
5. Unless otherwise specified, all values or indicators in this manual are tested at $T_a=25^{\circ}\text{C}$, humidity<75%RH, rated input voltage and rated load
6. All values or indicators in this manual had been tested based on Aipupower test specifications.
7. The specifications are specially for the parts listed in this manual, any other non-standard model performances could be out of the specifications. Please contact our technician for specific requirements.
8. Aipupower can provide customization service.

Guangzhou Aipu Electron Technology Co., Ltd

Address - Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, China.

Tel - 86-20-84206763 Fax - 86-20-84206762 HOTLINE - 400-889-8821

E-mail - sales@aipu-elec.com Website - [https -//www.aipupower.com](https://www.aipupower.com)