

Typical Features

- ◆ Fixed input voltage, isolated & unregulated, output power 1W
- ◆ Efficiency up to 86%
- ◆ Mini SMD packaging, international standard pin-out
- ◆ Isolation Voltage 3000VDC
- ◆ Operating Temperature from -40°C to +105°C
- ◆ Low no load input current
- ◆ Plastic case, flame class UL94 V-0



Test conditions: Unless otherwise specified, all parameter values had been tested at rated input voltage, pure resistive rated load, and at room temperature 25 °C.

Application Filed

This series of converters could be widely used for instrument, communication, pure digital circuit, general low frequency analog circuit, relay drive circuit, data exchange circuit, etc.

Typical Product List

Certificate	Part No.	Input Voltage Range (VDC)		Output Voltage/Current		Input Current (mA)Typ. @Rated Voltage		Max. Capacitive Load	Ripple & Noise 20MHz (mVp-p)	Efficiency (%) @full load/rated input	
		Rated	Range	Voltage (VDC)	Io (mA) Max / Min	Full load	No Load			Max/Typ	Min
-	NN1-05D05A3NT	5	4.5	±5	±100/±10	230	8	1200	100/80	81	84
-	NN1-05D09A3NT			±9	±55/±6	228	10	1200	100/80	81	84
-	NN1-05D12A3NT			±12	±42/±4	226	14	470	100/80	81	84
-	NN1-05D15A3NT			±15	±33/±3	230	16	330	100/80	80	83
-	NN1-05D24A3NT			±24	±21/±2	245	20	330	100/80	80	83
-	NN1-12D05A3NT	12	10.8	±5	±100/±10	98	8	1200	100/80	81	84
-	NN1-12D09A3NT			±9	±56/±6	96	8	1000	100/80	81	84
-	NN1-12D12A3NT			±12	±42/±4	96	8	470	100/80	82	85
-	NN1-12D15A3NT			±15	±33/±3	92	9	470	100/80	83	86
-	NN1-24D05A3NT	24	21.6	±5	±100/±10	48	8	1200	100/80	81	84
-	NN1-24D09A3NT			±9	±56/±6	46	8	1000	100/80	81	84
-	NN1-24D12A3NT			±12	±42/±4	46	8	470	100/80	82	85
-	NN1-24D15A3NT			±15	±33/±3	46	8	470	100/80	83	86


Note - The ripple and noise are tested by the twisted pair method.

Input Specifications

Item	Operating Condition	Min.	Typ.	Max.	Unit
Input inrush voltage (1Second Max.)	3.3Vdc Input	-0.7	--	7	Vdc
	5Vdc Input	-0.7	--	9	
	9Vdc Input	-0.7	--	12	

	12Vdc Input	-0.7	--	18				
	15Vdc Input	-0.7	--	21				
	24Vdc Input	-0.7	--	30				
Input Filter Type	Capacitor Filter							
Hot Plug	Unavailable							
Output Specifications								
Item	Operating Condition		Min.	Typ.	Max.	Unit		
Output Power			0.1	--	1	W		
Output Voltage Accuracy	Please refer to the output voltage deviation curve (Figure 1)							
Load Regulation	10%-100% load	3.3Vdc output	-	15	20	%		
		Others voltage output	-	10	15			
Line Regulation	Input voltage change ±1%	3.3Vdc output	-	-	1.5	--		
		Other voltage output	-	-	1.2			
Temperature Drift Coefficient	Full load		-	-	±0.03	%/°C		
Short Circuit Protection	Continuous, Self-recovery							
General Specifications								
Item	Operating Condition		Min.	Typ.	Max.	Unit		
Switching Frequency	Rated input voltage, full load		--	260	--	KHz		
Operating Temperature	Refer to the temperature derating curve (Figure 2)		-40	--	+105	°C		
Storage Temperature			-55	--	+125			
Case Temperature Rise	Operating at Ta =25°C		--	30°	--			
Pin Soldering Temperature	1.5mm from the case, 10S		--	--	300			
Reflow Temperature	Peak temperature Tc≤250°C, the maximum time above 217°C is 60S							
Relative Humidity	No condensing		5	--	95	%RH		
Isolation Voltage	Input-Output, test 1min, leakage current<1mA		3000	--	--	VDC		
Insulation Resistance	Input-Output, @ 500Vdc		1000	--	--	MΩ		
Isolation Capacitor	Input/Output,100KHz/0.1V		--	20	--	pF		
MTBF	MIL-HDBK-217F@25°C		3500	--	--	K hours		
Case Material	Plastic in Black, flame class UL94 V-0							
Product Weight	1.4 g (Typ.)							
Cooling Method	Natural air							
Unit dimensions	L x W x H		15.24X11.40X7.25 mm		0.600 × 0.449 × 0.285 inch			
EMC Performance								
EMI	CE	CISPR32/EN55032 CLASS B (with EMC Recommended Circuit)						
	RE	CISPR32/EN55032 CLASS B (with EMC Recommended Circuit)						
EMS	ESD	IEC/EN61000-4-2 Air ±8kV, Contact ±6kV perf. Criteria B						

Mechanical Dimensions

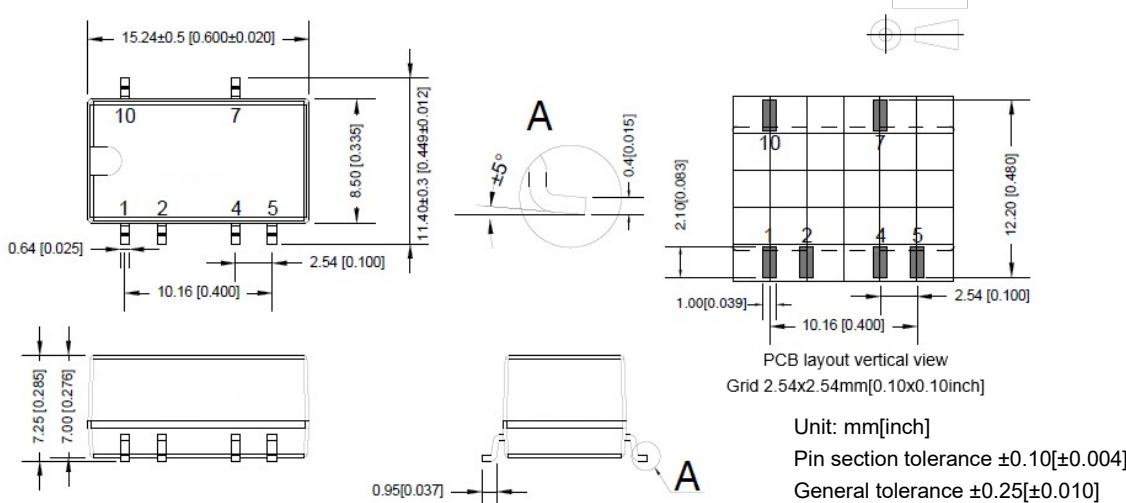

Pin-out function description

Pin No.	1	2	4	5	7	10
Function	GND	+Vin	COM	-Vo	+Vo	NC


Note 1 - Please take the pin definition on the product label marking as the right one if it is different than the one defined in this data sheet.

Note 2 - Pin 10 NC means No Connecting with any external circuit.

Ripple & Noise Test Instructions (Twisted Pair Method, 20MHz Bandwidth)

1. The Ripple & noise test need 12# twisted pair cables, an oscilloscope which bandwidth should be set to 20MHz, 0.1uF polypropylene capacitor and 10uF high-frequency low-resistance electrolytic capacitor are connected in parallel with the probes (100M bandwidth). The oscilloscope should be set at the Sample Mode.

2. The output ripple noise test diagram is shown on the right. The converter output connects to the electronic load by the jig with cables which size should be defined according to the output current value. The twisted pair (length 30cm±2 cm) should be connected in parallel with the load, the location is as close as possible to the output pins or terminals. The test can be started after input power on.

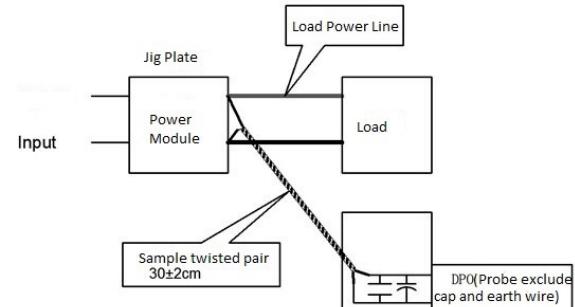

Product Performance Curves

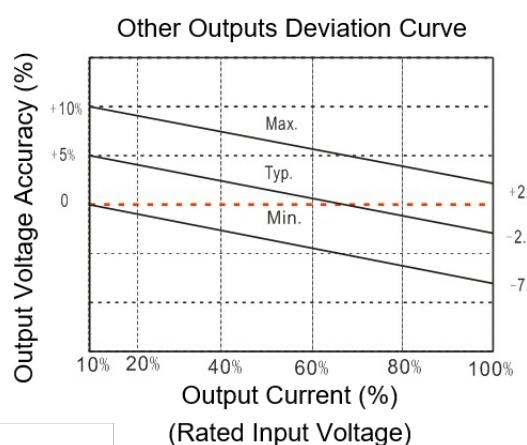
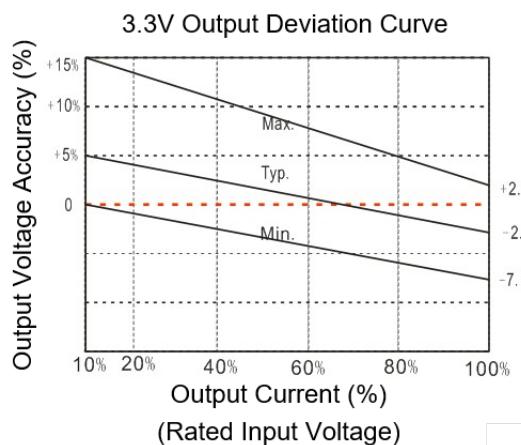


Figure 1

Temperature Derating Curve

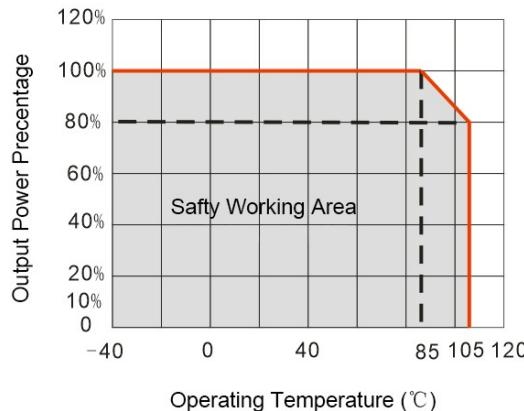


Figure 2


Recommended Circuits for Application

① Output load requirements

The maximum capacitive load of the product was tested at the Rated full load. The converter may not start or be damaged if the output capacitor exceeds this value.

② Typical application circuit


To effectively decrease the input and output ripple and noise, a capacitor filter should be connected at the input and output, the application circuits are shown in the figure below. The suitable filter capacitors should be chosen as the recommended capacitive load values in Table 1. The converter could not start if the capacitance is too big.

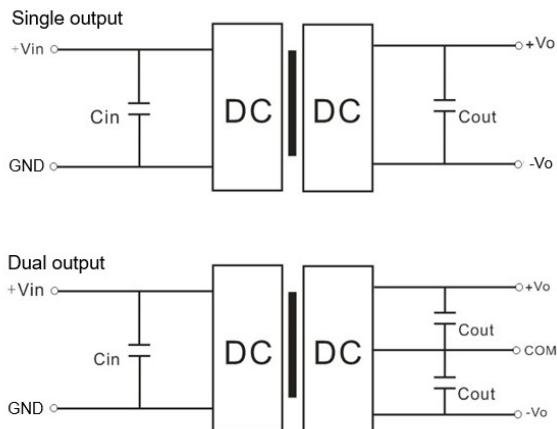


Recommended Capacitive Load Value Table (Table 1)

Vin (Vdc)	Cin	Single Vout (Vdc)	Cout (μF)	Dual Vout (Vdc)	Cout (μF)
5	10 μF/16V	3. 3	10 μF/16V	±3. 3	4. 7 μF/16V
12	2. 2 μF/25V	5	10 μF/16V	±5	4. 7 μF/16V
15	2. 2 μF/25V	9	2. 2 μF/25V	±9	2. 2 μF/25V
24	1 μF/50V	12	2. 2 μF/25V	±12	1 μF/25V
--	--	15	1 μF/25V	±15	1 μF/16V
--	--	24	1 μF/50V	±24	0. 47 μF/50V

③ Recommended EMC Circuit

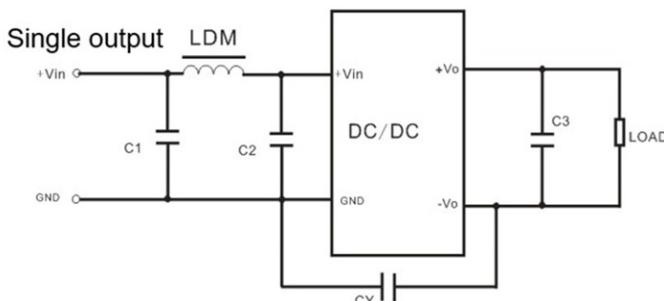


Input voltage		5VDC	12/15/24VDC
EMI	C1/C2	4. 7μF/16V	4. 7μF/50V
	CY	270pF/4KV	270pF/4KV
	C3	Refer to Cout in Table 1	
	LDM	6. 8 μH	6. 8 μH

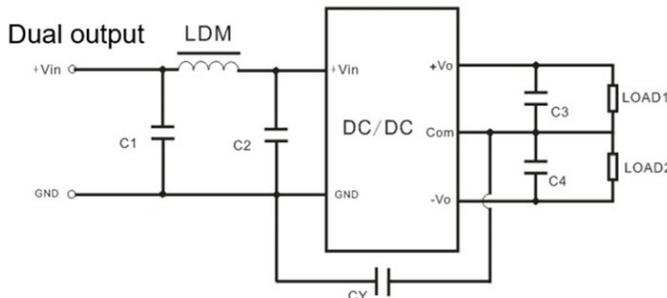





Input voltage		5VDC	12/15/24VDC
EMI	C1/C2	4. 7μF/16V	4. 7μF/50V
	CY	270pF/4KV	270pF/4KV
	C3/C4	Refer to Cout in Table 1	
	LDM	6. 8 μ H	6. 8 μ H

④ Output voltage regulation and over voltage protection

The simple solution to achieve the output voltage regulated, over voltage and over current protections is to connect a linear regulator with overheat protection at input or output, and a capacitor filter connected in parallel as below circuit. Filter capacitive value recommended see table 1, Linear regulator should be chosen according to the actual voltage & current for operating. Or Aipu NW series products are recommended instead.

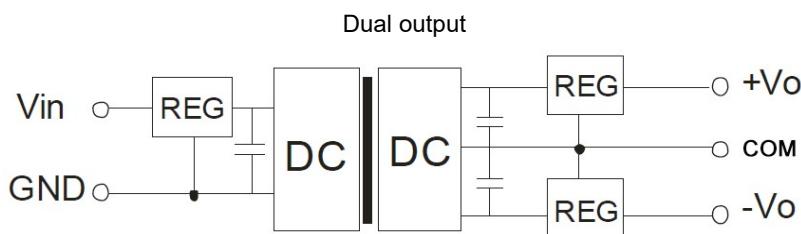

Packing Information

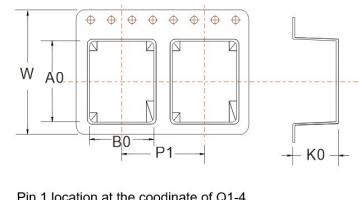

Note:
Unit: mm[inch]
General tolerance: $\pm 1.50 [\pm 0.059]$
Packing QTY: 33pcs/Tube
Packing QTY: 2640pcs/Carton
Tube size: 525x18x10mm
Carton size: 542x110x155mm

Part No.	Packaging Type	Pin	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W1 (mm)	Pin1 Location
NN1-XXDXXA3NT	SMD	6	500	330.0	24.5	15.65	12.05	8.0	16.0	24.0	Q1

Tube packing

Reel packing (500pcs per Reel)

Application Notice

1. This product cannot be used in parallel, and it does not support hot-plugging.
2. The product performance in this data sheet cannot be guaranteed if it works at a lower load than the minimum load condition.
3. All values or indicators in this data sheet had been tested based on Aipupower test specifications.

Guangzhou Aipu Electron Technology Co., Ltd

Address: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, China.

Tel: 86-20-84206763 Fax: 86-20-84206762 HOTLINE: 400-889-8821

E-mail: sales@aipu-elec.com Website: <https://www.aipupower.com>