


Typical Features

- ◆ Fixed input voltage, isolated & unregulated, output 1W
- ◆ Efficiency up to 81% (Typ.)
- ◆ Mini size SIP package
- ◆ Isolation voltage 1500VDC
- ◆ Continuous short circuit protection, self-recovery
- ◆ Operating temperature from -40°C to +85°C
- ◆ Plastic case, flame class UL94-V0



Application Field

This series of products can be widely used in the fields of instrument, communication, pure digital circuit, general low frequency analog circuit, relay drive circuit, data exchange circuit, etc.

Typical Product List

Certificate	Part No.	Input Voltage Range		Output Voltage/Current (Vo/Io)		Input Current (mA) Typ. @nominal volt.		Max. Capacitive Load (uF)	Efficiency @Full load, nominal volt.	
		Nominal (VDC)	Range (VDC)	Vo (VDC)	Io (mA)	Full Load	No Load		Min (%)	Typ. (%)
-	FN1-3V3S3V3ANR2	3.3	2.97	3.3	303	404	30	220	68	72
-	FN1-3V3S05ANR2		-	5	200	404	30	220	72	76
-	FN1-3V3S12ANR2		3.63	12	83	347	45	470	76	80
-	FN1-05S3V3ANR2	5	4.5 - 5.5	3.3	300	277	25	470	68	72
-	FN1-05S05ANR2			5	200	239	17	470	76	80
-	FN1-05S09ANR2			9	110	277	20	470	76	80
-	FN1-05S12ANR2			12	83	277	20	470	76	80
-	FN1-05S15ANR2			15	67	277	20	470	76	80
-	FN1-05S24ANR2			24	42	277	20	470	76	80
-	FN1-12S3V3ANR2	12	10.8 - 13.2	3.3	300	116	15	470	68	72
-	FN1-12S05ANR2			5	200	101	11	470	76	80
-	FN1-12S09ANR2			9	110	108	15	470	76	80
-	FN1-12S12ANR2			12	83	101	16	470	76	80
-	FN1-12S15ANR2			15	67	99	13	470	76	80
-	FN1-12S24ANR2			24	42	115	15	470	76	80
-	FN1-15S05ANR2	15	13.5 - 16.5	5	200	82	10	470	76	80
-	FN1-15S12ANR2			12	83	82	12	470	76	80
-	FN1-15S15ANR2			15	67	82	10	470	79	81
-	FN1-24S3V3ANR2	24	21.6 - 26.4	3.3	300	57	7	470	68	72
-	FN1-24S05ANR2			5	200	48	7	470	79	83
-	FN1-24S09ANR2			9	110	57	7	470	76	80
-	FN1-24S12ANR2			12	83	50	8	470	76	80

-	FN1-24S15ANR2			15	67	52	8	470	76	80
-	FN1-24S24ANR2			24	42	52	8	470	76	80

Note 1: The maximum capacitive load is the capacitance allowed to be used when the power supply starts up at full load. The converter may not start if the capacitor exceeds this value.

Note 2: The efficiency is tested at the nominal input voltage and the rated load.

Note 3: Please contact Aipu sales for other output voltages requirements of this series but not listed in this table.

Input Specifications

Item	Test Condition	Min.	Typ.	Max.	Unit
Input inrush voltage (1Sec max.)	3.3Vdc Input	-0.7	-	7	VDC
	5Vdc Input	-0.7	-	9	
	12Vdc Input	-0.7	-	18	
	15Vdc Input	-0.7	-	21	
	24Vdc Input	-0.7	-	30	
Input filter	Capacitor filter				
Hot-plug	Unavailable				

Output Specifications

Item	Test Condition	Min.	Typ.	Max.	Unit
Output power		0.1	-	1	W
Output voltage accuracy	Please refer to the Output Voltage Deviation Graphs (Figure 1)				
Load regulation	10%-100% load	3.3Vdc output	-	15	20
		Others	-	10	15
Line voltage regulation	Input voltage change $\pm 1\%$	3.3Vdc output	-	-	± 1.5
		Others	-	-	± 1.2
Temperature drift coefficient	100% load	-	-	± 0.03	$^{\circ}/^{\circ}C$
Ripple & Noise	0%-100% load, 20MHz bandwidth	-	100	150	mVp-p
Short circuit protection	Continuous, self-recovery				

Note: The Ripple & Noise is tested by the Twisted Pair Method, please refer to the following test instruction.

General Specifications


Item	Test Condition		Min.	Typ.	Max.	Unit
Switching frequency	Nominal input voltage, full load		-	100	-	KHz
Operating temperature	Refer to the Temperature Derating Graph (Figure 2)		-40	-	+85	$^{\circ}C$
Storage temperature			-55	-	+125	$^{\circ}C$
Case temperature rise	Within the operation derating range		-	25 $^{\circ}$	-	$^{\circ}C$
Pin soldering temperature	1.5mm from the case, soldering time 10S		-	-	300	$^{\circ}C$
Relative humidity	No condensing		5	-	95	%RH
Isolation voltage	I/P-O/P	Test 1 minute, leakage current <1mA	1500	-	-	VDC
Insulation resistance	I/P-O/P	@ 500VDC	1000	-	-	M Ω

Isolation capacitance	I/P-O/P	100KHz/0.1V	-	20	-	pF
Vibration			10-150Hz, 5G, 30 Min. along X, Y and Z			
MTBF	MIL-HDBK-217F@25°C		3500	-	-	K hours
Case material	Plastic in Black, flame class UL94-V0					
Unit weight	1.4g (Typ.)					
Cooling method	Natural air					
Packing	Tube size (525x18x10mm)			43PCS/Tube		
	Carton size (542x110x155mm)			3440PCS/Carton (Total 80 Tubes)		
Unit dimensions	L x W x H		11.50 × 6.00 × 10.10 mm	0.453 × 0.236 × 0.398 inch		

EMC Performance

Item		Test Standard	Performance/Class
EMI	CE	CISPR32/EN55032	CLASS B (with the Recommended EMC circuit)
	RE	CISPR32/EN55032	CLASS B (with the Recommended EMC circuit)
EMS	ESD	IEC/EN61000-4-2	Air ±8kV, Contact ±6kV perf. Criteria B

Mechanical Dimensions

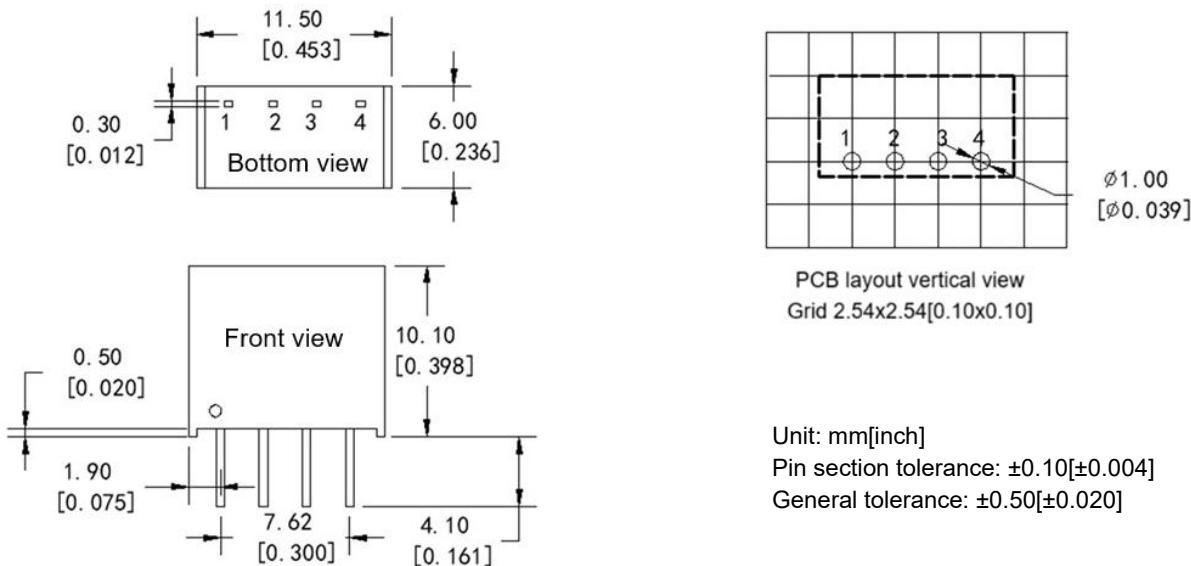


Pin-out Function Description

Pin No.	1	2	3	4			
Single (S)	GND	+Vin	-Vo	+Vo			

Note: Please take the pin definition on the product label as the right one if it is different than the data sheet description.

Ripple & Noise Test Instruction (Twisted Pair Method, 20MHZ bandwidth)

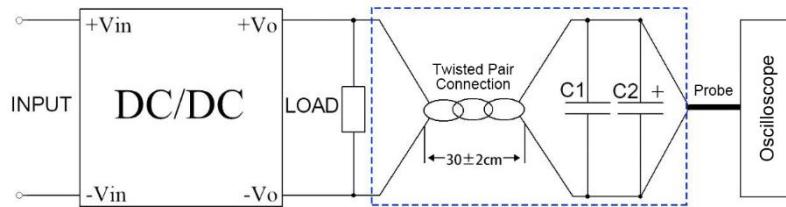

1. The Ripple & noise test needs 12# twisted pair cables, an oscilloscope which should be set at the Sample Mode, bandwidth 20MHz. 100M bandwidth probe with cap and ground removed. C1(0.1uF polypropylene capacitor) and C2(10uF high frequency low impedance electrolytic capacitor) are connected in parallel with the probes and one side of the twisted pair.
2. Refer to the test diagram, the converter output connects to the electronic load by the jig with cables which size should be defined according to the output current value. The other side of the twisted pair (length $30\text{cm}\pm 2\text{cm}$) should be connected in parallel with the load. The test can start after the input power on.
3. It is recommended to use a $\geq 10\%$ load or a high frequency low impedance electrolytic capacitor ($\geq 100\mu\text{F}$) load at the output to avoid the output ripple increasing.

Product Characteristics Graphs

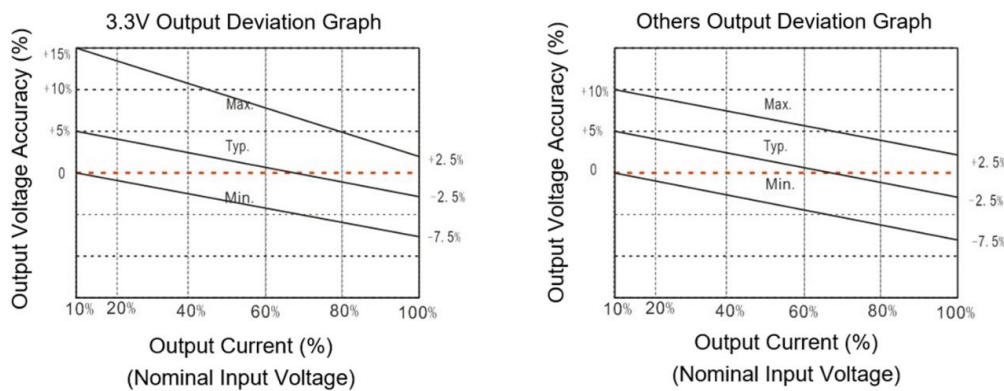


Figure 1

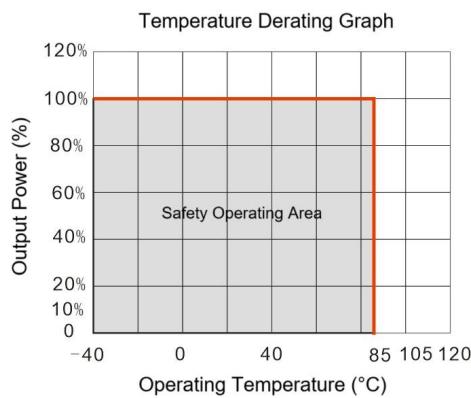


Figure 2


Recommended Circuits for Application

1. Requirement for Output load

- a. To ensure the converter operating efficiently and reliably, its minimum load should not be less than 10% of the rated load. It is recommended to connect a resistor in parallel to the output when the real load is less than 10% (the sum of the power consumed should be bigger than or equal to 10% of the rated power).
- b. The maximum capacitive load is tested at the full load. The converter may not start or be damaged at the capacitive over-load.


2. Typical application circuit

To ensure effectively decrease the input and output ripple and noise, a capacitor filtering net can be used at the input and output, the application circuit diagram is shown below. Suitable filtering capacitors should be chosen as the recommended capacitive load values in Table 1. The converter could not start if the capacitance is too big.

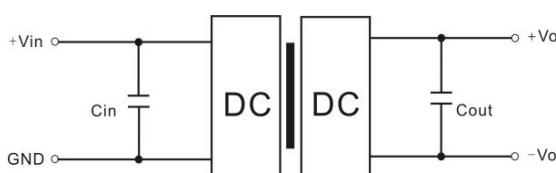

Recommended Capacitive Load Values (Table 1)			
Vin (Vdc)	Cin	Vout (Vdc)	Cout
3.3	4.7uF/16V	3.3	10uF/16V
5	4.7uF/16V	5	10uF/16V
12	2.2uF/25V	9 & 12	4.7uF/25V
15	2.2uF/25V	15	2.2uF/25V
24	1uF/50V	24	1uF/50V


3. Recommended EMC circuit diagram

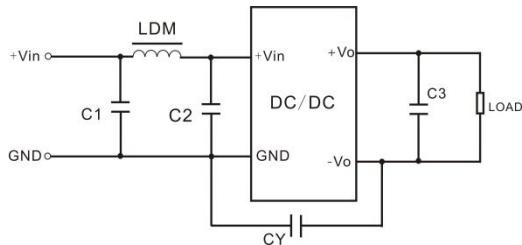

	Input Voltage	3.3/5Vdc	12/15/24Vdc
EMI	C1/C2	4.7uF/16V	4.7uF/50V
	CY	270pF/2KVdc	270pF/2KVdc
	C3	Refer to Cout value in Table 1	
	LDM	6.8uH	6.8uH

4. Output voltage regulation and overvoltage protection

The simple solution to achieve the output regulated voltage, over voltage and over current protections is to use a linear regulator with overheat protection at input or output, and a capacitor filtering net connected in parallel as below circuit. Filter capacitive value recommended see table 1, Linear regulator should be chosen according to the actual voltage & current for operating. Or Aipu NW series products are recommended instead.

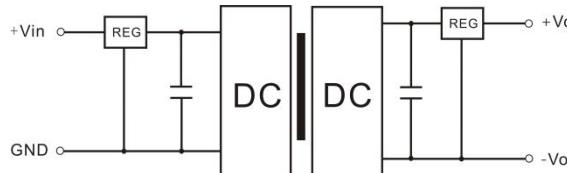

Application Notice

- This series of products cannot be used in parallel, and do not support hot-plug.
- The product should be used according to the specifications, otherwise it could be permanently damaged.
- The product performance cannot be guaranteed if it works at a lower load than the minimum load defined.
- The product performance cannot be guaranteed if it works under over-load condition.
- Unless otherwise specified, all values or indicators on this datasheet are tested at $T_a=25^{\circ}\text{C}$, humidity<75%RH, nominal input voltage and rated load (pure resistance load).
- All values or indicators on this datasheet have been tested based on Aipupower test specifications.
- The specifications are specially for the parts listed on this datasheet, any other non-standard model performances could be out of the specifications. Please contact our technician for specific requirements.
- Aipupower can provide customization service.

Guangzhou Aipu Electron Technology Co., Ltd

Address: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, China.

Tel: 86-20-84206763 Fax: 86-20-84206762 HOTLINE: 400-889-8821

E-mail: sales@aipu-elec.com Website: <https://www.aipupower.com>