



## Typical Features

- ◆ Wide input voltage range 2 : 1
- ◆ Efficiency 90% (Typ.)
- ◆ Low standby power consumption
- ◆ Operating Temperature from -40°C to +105°C
- ◆ High isolation voltage 3000VDC(input-output) & 2100VDC(input-case)
- ◆ Input under voltage protection, output over current, over voltage, over temp. & short circuit protections
- ◆ Standard 1/2 brick size

**ZBD300-280S48C** A high-performance 1/2 Brick size DC-DC converter with the rated input voltage 280VDC (full range from 180V to 425VDC), regulated single output 48V/300W without minimum load limit. It has the advantages of high isolation voltage, Max operating temperature up to 105°C, with input under-voltage protection, output over-current, over-voltage, over-temperature and short circuit protections, input ON/OFF control, output voltage distal end compensation and output voltage Trim, etc.

### Typical Product List

Part No.	Input voltage range (VDC)	Output Power (W)	Output Voltage (VDC)	Output Current (A)	Ripple & Noise (mVp-p)	Full load Efficiency (%) Min/Typ.	Remark
ZBD300-280S48CC							Positive logic Standard
ZBD300-280S48CN							Negative logic Standard
ZBD300-280S48CC-H	180-425	300	48	6.25	480	88/90	Positive logic With heat sink
ZBD300-280S48CN-H							Negative logic With heat sink

### Input Specifications

Item	Operating conditions	Min.	Typ.	Max.	Unit
Input current Max	Input 180VAC, full load output	--	--	2.5	A
No-load current	Rated input voltage	--	--	30	mA
Input inrush voltage (1sec. max.)	The unit could be permanently broken over this voltage	-0.7	--	450	VDC
Start-up voltage		--	--	180	
Under-voltage protection	With No load (The over current protection could work in advance at full load)	--	--	170	
ON/OFF control (CNT)	Positive logic: CNT no connection or connected to 3.5-15V to turn on, connected to 0-1.2V to turn off the converter.				Reference voltage -Vin
	Negative logic: CNT no connection or connected to 3.5-15V to turn off, connected to 0-1.2V voltage to turn on the converter.				

## Output Specifications

Item	Operating conditions	Min.	Typ.	Max.	Unit
Output voltage accuracy	Nominal input voltage, 0%-100% load	--	±0.5	±1	%
Line regulation	Full load, input voltage from low to high	--	±0.2	±0.5	
Load regulation	Nominal input voltage, 10%-100% load	--	±0.2	±0.5	
Transient recovery time	25% load step change (step rate 1A/50uS)	--	200	250	uS
Transient response deviation		-5	--	+5	%
Temperature drift coefficient	Full load	-0.02	--	+0.02	%/°C
Ripple & Noise	20M bandwidth, with external capacitor ≥220uF	--	240	480	mVp-p
Output voltage TRIM		-20	--	+10	%
Distal end compensation (Sense)		--	--	5	%
Over temperature protection	Maximum temperature of the Metal base	105	115	125	°C
Over voltage protection		125	--	140	%
Over current protection		6.8	--	8.7	A
Short circuit protection		Hiccup, continuous, self-recovery			

## General Specifications

Item	Operating conditions		Min.	Typ.	Max.	Unit
Isolation voltage	I/P-O/P	Test 1min, leakage current <3mA	3000	--	--	VDC
	I/P-Case	Test 1min, leakage current <3mA	2100	--	--	VDC
	O/P-Case	Test 1min, leakage current <3mA	500	--	--	VDC
Insulation resistance	I/P-O/P	@ 500VDC		100	--	--
Switching frequency			--	230	--	KHz
MTBF			150	--	--	K hours

## Environmental characteristics

Item	Operating conditions	Min.	Typ.	Max.	Unit	
Operating temperature	Refer to the temperature derating graph	-40	--	+105	°C	
Storage humidity	No condensing	5	--	95	%RH	
Storage temperature		-40	--	+125	°C	
Pin soldering temperature	1.5mm from the case, soldering time <1.5S	--	--	+350		
Cooling requirement		EN60068-2-1				
Dry and heat requirements		EN60068-2-2				
Moisture and heat requirements		EN60068-2-30				
Shock and vibration		IEC/EN 61373 C1/Body Mounted Class B				



## EMC Performances

EMI	CE	EN50121-3-2	150kHz-500kHz 79dBuV	
		EN55016-2-1	500kHz-30MHz 73dBuV	
	RE	EN50121-3-2	30MHz-230MHz 40dBuV/m at 10m	
		EN55016-2-1	230MHz-1GHz 47dBuV/m at 10m	
EMS	ESD	IEC/EN61000-4-2/GB/T 17626.2-2006	Contact $\pm 6\text{KV}$ /Air $\pm 8\text{KV}$	perf. Criteria A
	RS	IEC/EN61000-4-3/GB/T 17626.3-2006	10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4/GB/T 17626.4-2008	$\pm 2\text{kV}$ 5/50ns 5kHz	perf. Criteria A
	Surge	IEC/EN61000-4-5/GB/T 17626.5-2008	Line to line $\pm 1\text{KV}$ ( $42\Omega$ , $0.5\mu\text{F}$ )	perf. Criteria A
	CS	IEC/EN61000-4-6/GB/T 17626.6-2008	0.15MHz-80MHz 10 V r.m.s	perf. Criteria A

## Physical Characteristics

Case materials	Metal base + Plastic case in black, flame class UL94-V0
Heat sink	Dimension 61.0x57.9x15.0mm, weight 72g, Aluminum, anodized black
Cooling method	Conduction cooling or forced air cooling
Unit weight	Standard 115g, with heatsink 192g



## Product Characteristics Graphs

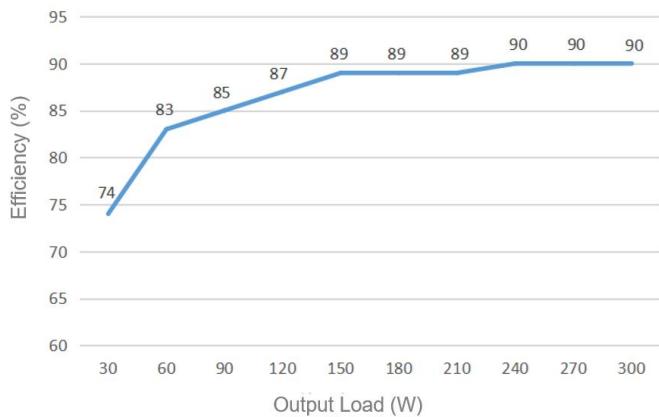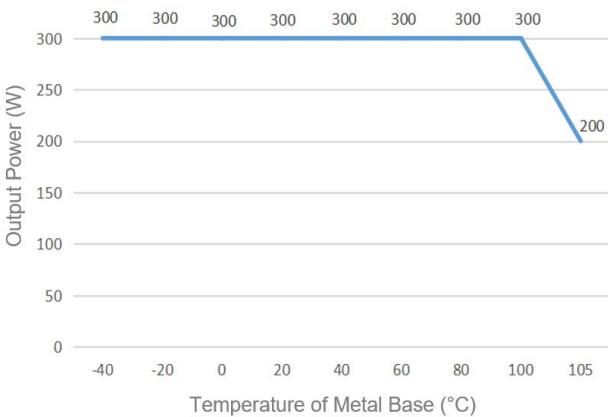






## Note:

- Both the output power and efficiency in the graphs have been tested with typical values.
- The data in temperature derating graph have been tested under Aipu laboratory test conditions. It is recommended to keep the temperature of the Metal base not more than 100 °C when the converter operates at the rated load for the application.

## Mechanical Dimensions and Pin-out Function Description

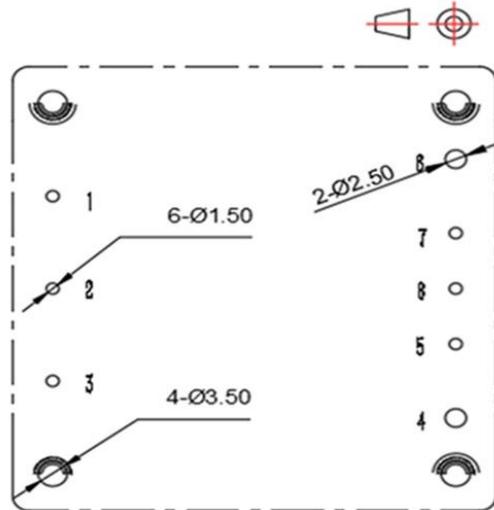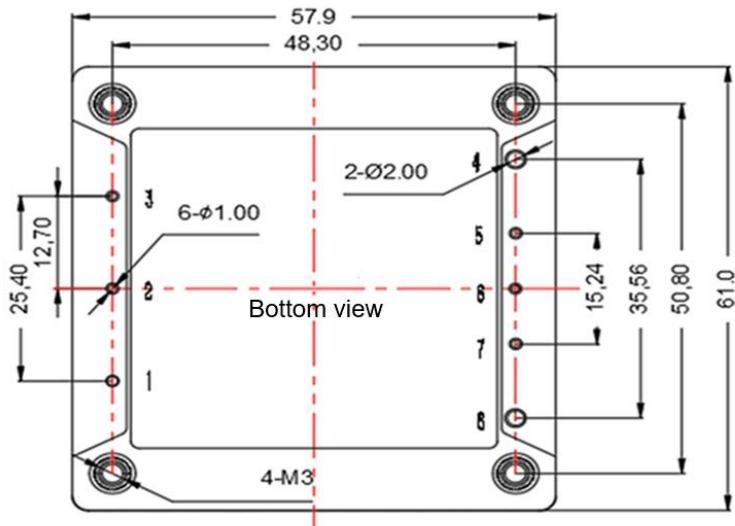

Recommended holes for PCB

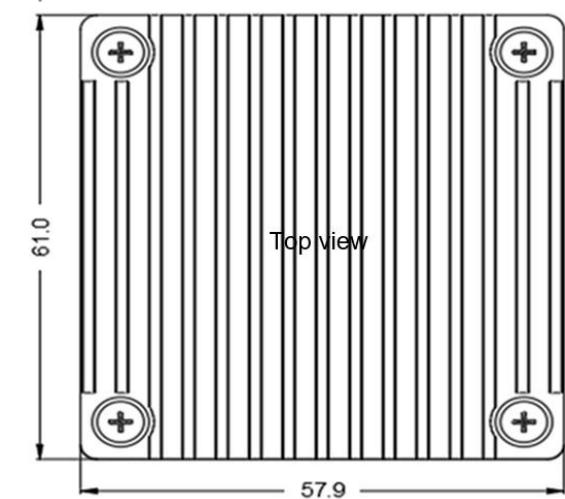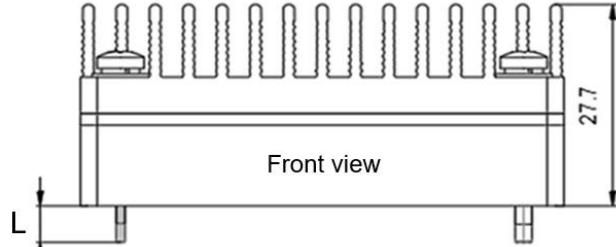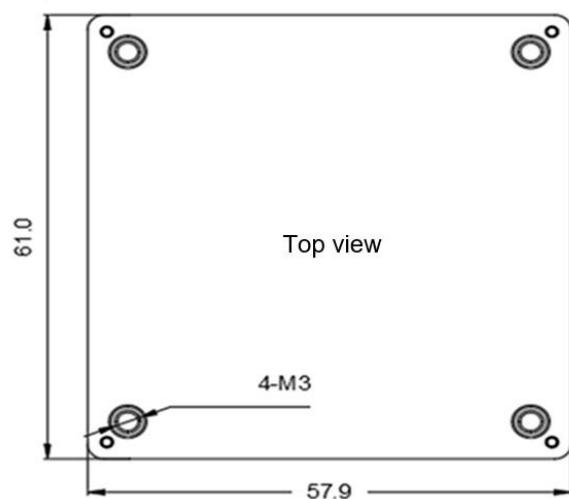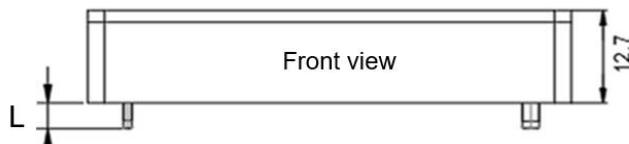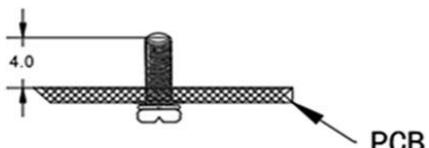Standard+Heat sink  
61.0x57.9x27.7mmStandard  
61.0x57.9x12.7mm

Note:  
 Unit: mm  
 Pin 1,2,3,5,6,7 diameter: 1.00mm  
 Pin 4,8 diameter: 2.00mm  
 Tolerance: X.X  $\pm$  0.50mm, X.XX  $\pm$  0.10mm  
 Screwing torque: 0.4N.m Max


Pin Length L=3.2mm

Pin No.	1	2	3	4	5	6	7	8
Function	+Vin	CNT	-Vin	-Vout	-Sense	TRIM	+Sense	+Vout

## Recommended circuits for application

### 1. Ripple & Noise


All this series of products will be tested according to this circuit diagram below before shipping.

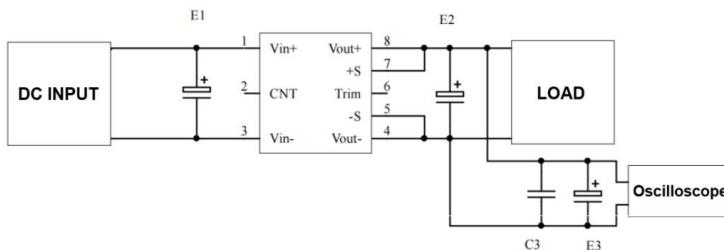

Capacitance Output Volt.	E1 (μF)	E2 (μF)	C3 (μF)	E3 (μF)
3.3VDC		1000		
5VDC		680		
12VDC	100			
.....		470		
48VDC			1	
.....				10
110VDC		68	68	


### 2. Recommended circuit diagram for application

If this circuit recommended below is not adopted, an electrolytic capacitor  $\geq 100 \mu\text{F}$  should be used at the input to suppress the possible surge voltage.

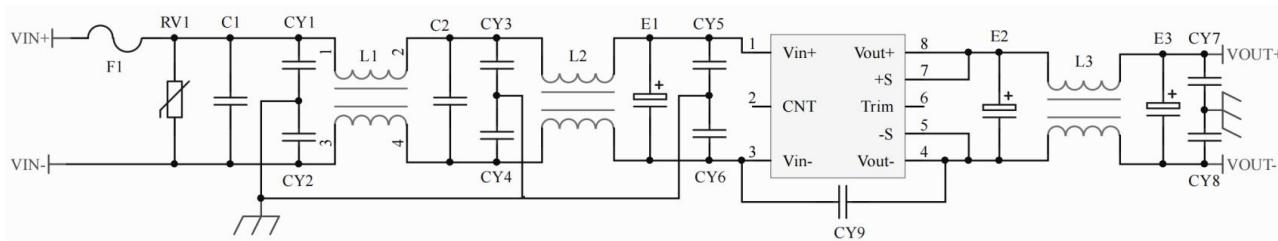


F1	T6.3A/250Vac FUSE
RV1	14D 510V Varistor
C1, C2	105/630V Polyester film capacitor
CY1, CY2, CY3, CY4, CY5, CY6	102/250Vac Y2 capacitor
CY7, CY8	103/2KV Ceramic capacitor
CY9	471/250Vac Y1 capacitor
E1	100μF/450V Electrolytic capacitor
E2, E3	220μF/63V Electrolytic capacitor
L1, L2	>5mH, temperature rise less than 25° @2.5A
L3	>220uH, temperature rise less than 25° @6.25A

### 3. Recommended circuits for the ON/OFF control (CNT)

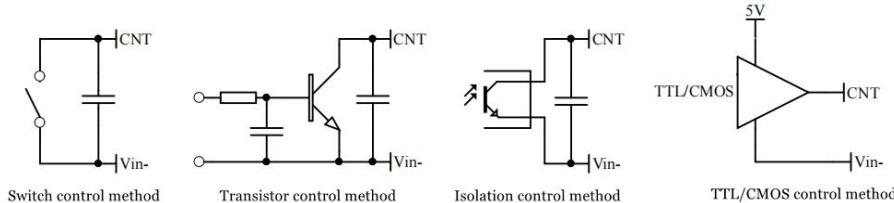

### 4. Application for Sense


#### 1) With NO distal end compensation

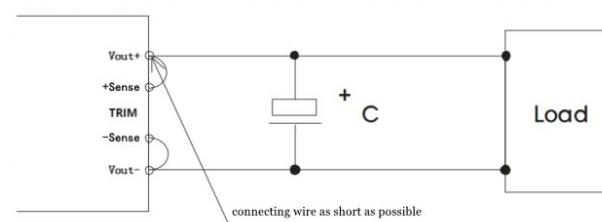

Note:

1. Vout+ & Sense+, Vout- & Sense- should be shorted when distal end compensation is not needed
2. The lead wire between Vout+ and Sense+, Vout- and Sense- should be as short as possible, and close to the pins, or else the output may be unstable.

## 2) With distal end compensation

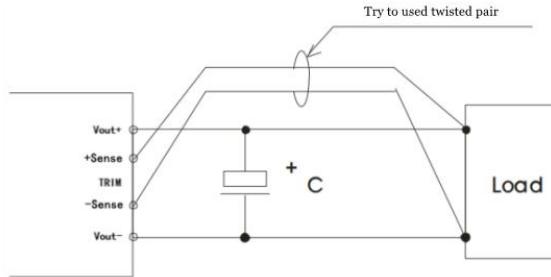

## Notes:


1. The output voltage may be unstable if the compensation cables are too long.
2. The twisted pair or shielded cables are recommended, the cable length should be as short as possible.
3. Wide copper path on PCB or thick lead wires between the power supply and the load should be used to achieve the line voltage drop <0.3V. The target is to keep output voltage within the specified range.
4. The leads wire resistance may create the output voltage oscillation or larger ripples. Please verify it before to use.

## 5. Output voltage TRIM and calculation of TRIM resistance


The calculation of  $\Delta U$  and  $R_{up}$  &  $R_{down}$ :

$$R_{up}=250/\Delta U-5.1 \text{ (K}\Omega\text{)}$$

$$R_{down}=100*(48-2.5-\Delta U)/\Delta U-5.1 \text{ (K}\Omega\text{)}$$



Voltage-up: Add  $R_{up}$  between Trim and Vout-



Voltage-down: Add  $R_{down}$  between Trim and Vout+

**6. This product is not available to be used in parallel to increase the output power. Please contact Aipu technician for this kind of requirement.**

## Others

1. The product warranty period is two years. The failed product can be repaired/replaced free of charge if it operates under normal conditions. A paid service shall be also provided if the product fails after operating under wrong or unreasonable conditions.
2. Aipupower can provide customization design and filter modules for matching, please contact our technician for details.

## Guangzhou Aipu Electron Technology Co., Ltd

Address: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, China.

Tel: 86-20-84206763 Fax: 86-20-84206762 HOTLINE: 400-889-8821

E-mail: [sales@aipu-elec.com](mailto:sales@aipu-elec.com) Website: <https://www.aipupower.com>