AIPUPOWER®

DC-DC Converter FK6-XXDXXE2C3 Series



Typical Features

- Wide input voltage range (4:1), Output Power 6W
- Transfer Efficiency up to 84%
- Continuous Short Circuit protection, Self-recovery
- Protections: Input under voltage, output short circuit, over current
- Switching Frequency 500KHz
- Isolation Voltage 3000 VDC
- Operating Temperature: -40°C~+85°C
- Good EMI performance

Alfaurauver® Alfaurauver® FKG-XXDXXE2C3 Rotts Rotts

Application Field

FK6-XXDXXE2C3 The newly developed DC-DC module power supply for our company, SIP package, 6W output power, ultra-wide voltage input range, ultra-low standby power consumption, isolated and regulated single output, can be widely used in industrial control, instrumentation, communication, Electricity, Internet of Things, BMS and other fields.

Typical Product List

Part no.	Input Voltage Range (VDC)		Output Voltage/Current (Vo/lo)		Input Current (mA) (Nominal Voltage)		Max. Capaci tive Load	Ripple & Noise		Efficiency (%)output full load, I/P nominal voltage	
	Nomin al	Range	Volta ge (VDC)	Current(mA) Max./Min	Full load typ.	No Load typ.	uF	mV Typ.	′p-p Max	Min.	Тур.
FK6-18D05E2C3		9-36	±5	±600/0	305	5	1000	100	150	80	82
FK6-18D09E2C3			±9	±333/0	294	6	470	100	150	83	85
FK6-18D12E2C3			±12	±250/0	296	8	220	100	150	81	83
FK6-18D15E2C3	24		±15	±200/0	296	6	220	100	150	81	83
FK6-18D18E2C3			±18	±167/0	300	7	180	100	150	81	83
FK6-18D24E2C3			±24	±125/0	305	9	100	100	150	80	82

1. The maximum capacitive load refers to the capacity of the capacitor that is allowed to be connected when the power supply is fully loaded. If the capacity is exceeded, the power supply may not be able to start;

2. With "C", it has control pin function;

Input Specification						
Input Filter	capacitor filter					
Input Under-Voltage Protection	6-7 VDC					
CTRL*	Module turn-on	CTRL suspended or TTL high level (3.5-12VDC)				

Guangzhou Aipu Electron Technology Co., Ltd

Guangzhou Aipu Electron Technology Co., Ltd reserves the copyright and right of final interpretation. Version: A/2 Date: 2023-07-10 Page 1 of 6



DC-DC Converter FK6-XXDXXE2C3 Series



	Module turr	n-off	CTRL connect to GND or low level (0-1.2VDC)			
	Input current when	switched off	5mA (TYP)			
Note: *The voltage of CTRL pin i	is relative to GND pin.	'				
Output Specification						
Output Voltage Accuracy	Full voltage full load		Vo1	±2.0%max		
			Vo2	±3.0%max		
Line Regulation	Nominal load, full	voltage range	Vo1	±1.0%max		
			Vo2	\pm 1.5%max		
Lood regulation	10% ~ 100% pc	minal load	Vo1	±1.5%max		
Load regulation 10% ~ 100%		ominal load	Vo2	\pm 2.0%max		
Ripple & Noise	Nominal load, nominal volt Method, 20M Hz		N	Vp-p≪150mV		
Output Over-load Protection	110%~230%					
Output Short circuit Protection	Continuous, self-recovery					
				±5% typ., ±8% max /500us		
Dynamic Response	25% nominal load step △Vo/∆t	5V Output		±3% typ., ±5% max /500us		
Output Voltage Adjustment		Other voltage output		13 % typ., 13 % max / 30003		
	Turring	No adjustment				
Turn-on delay time	i ypicai	Typical		100ms		
Output Turn-on Overshoot Voltage			≤10%Vo			
General Specification						
Switching Frequency	Typical	Typical 500KHz				
Operating Temperature	Refer to Temperature Derating Curve	-40°C ~ +85°C		2		
Storage Temperature	-	-55° C ~ +125 °C				
Max Case Temperature	Within Operating Curve	+105℃				
Relative Humidity	No condensing	5%~95%				
Case Material		Black flame-retardant and heat-resistant plastic				
Cooling Method		Natural air cooling				
Isolation Voltage	Input to Output	3000Vdc ≤0.5mA / 1min		/ 1min		
MTBF	MIL-HDBK-217F@25℃	2X10 ⁵ Hrs				
Product Weight	Average	5.0 g				

 Guangzhou Aipu Electron Technology Co., Ltd reserves the copyright and right of final interpretation.
 Version:A/2
 Date: 2023-07-10
 Page 2 of 6


AIPUPOWER®

DC-DC Converter FK6-XXDXXE2C3 Series



EMC Characteristics						
Tota	al Items	Sub Items	Test Standard	Class		
	EMI	CE	CISPR22/EN55032	CLASS B (see recommended circuit photo)		
		RE	CISPR22/EN55032	CLASS B (see recommended circuit photo)		
		RS	IEC/EN61000-4-3	10V/m Perf.Criteria A		
EMC		CS	IEC/EN61000-4-6	3Vr.m.s Perf.Criteria A		
	EMS	ESD	IEC/EN61000-4-2	Contact ±4KV Perf.Criteria B		
		Surge	IEC/EN61000-4-5	±2KV Perf.Criteria B (see recommended circuit photo)		
		EFT	IEC/EN61000-4-4	±2KV Perf.Criteria B (see recommended circuit photo)		

Packing Dimension

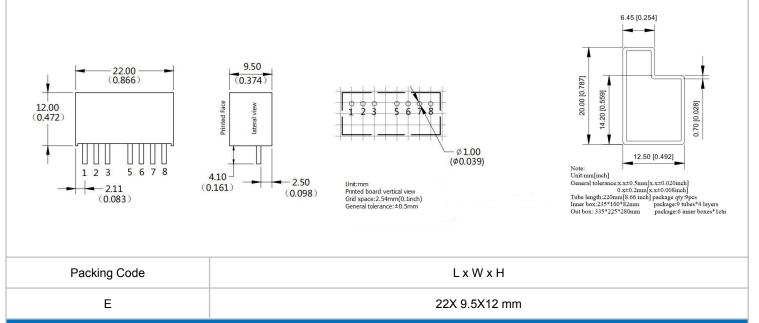

Pin out Specifications

Duel output (C)	1	2	3	5	6	7	8
Dual output (S)	-Vin	+Vin	CTRL	NC	+Vout	0V	-Vout

Guangzhou Aipu Electron Technology Co. , Ltd

Guangzhou Aipu Electron Technology Co., Ltd reserves the copyright and right of final interpretation. Version: A/2 Date: 2023-07-10 Page 3 of 6



DC-DC Converter FK6-XXDXXE2C3 Series



Ripple& Noise Test: (Twisted Pair Test Method 20MHz bandwidth)

- 1.12# twisted pair to connect, Oscilloscope bandwidth set as
- 20MHz, 100M bandwidth probe, terminated with 0.1uF
- polypropylene capacitor and 10uF high frequency low resistance
- electrolytic capacitor in parallel, oscilloscope set as Sample pattern.
- 2. Output Ripple& Noise Test Method:

Input terminal connect to power supply, output terminal connect to electronic load through jig plate, Use 30cm±2 cm sampling line, Power line selected from corresponding diameter wire with


insulation according to the flow of output current.

Application reference:

1. It is recommended to output a minimum of 10% load or connect an electrolytic capacitor with a high-frequency resistance above 470uF, otherwise it will increase the output voltage ripple;

- 2. It is recommended that the load imbalance of dual output products is less than $\pm 5\%$;
- 3. The maximum capacitive load is the result of the pure resistance full load condition test;
- 4. Our company can provide overall power supply solutions, or product customization;

Product characteristic curve

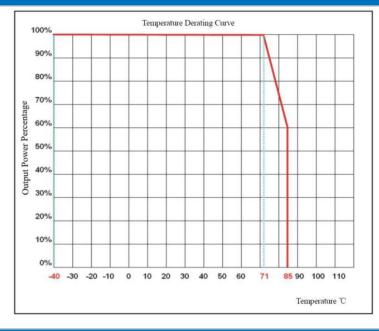


Design reference application

Recommended circuit


1.DC/DC test circuit:

Normal recommended capacitors:C0:47-100uF; C1,C2:22uF.

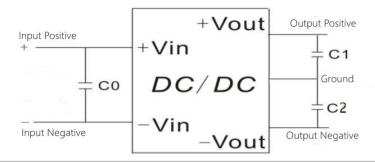

Guangzhou Aipu Electron Technology Co., Ltd


Guangzhou Aipu Electron Technology Co., Ltd reserves the copyright and right of final interpretation. Version: A/2 Date: 2023-07-10 Page 4 of 6

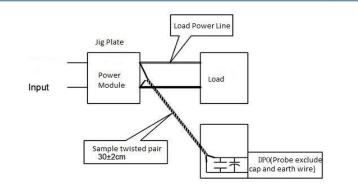




2. Input reflecting ripple current test circuit::

Capacitor C choose low ESR ones, withstand voltage value should be bigger than max input voltage;

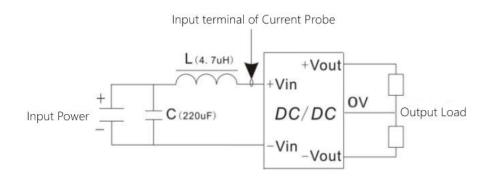

3.EMC external recommended circuit:

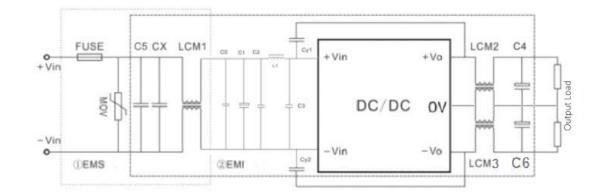

Recommend specs:

Component	FK6-18DXXE2 Input				
FUSE	According to customer's request				
MOV	14D560K				
СХ	0.47uF				
LCM1	20mH				
C5	1000uF/50V				
CO	1uF/100V				
C1	220uF/50V				
C2,C3	1uF/100V				
L1	4.7uH				
LCM2, LCM3	30uH				
C4, C6	22uF/50V				
CY1,CY2	2.2nF/2000V				

Guangzhou Aipu Electron Technology Co., Ltd

Guangzhou Aipu Electron Technology Co., Ltd reserves the copyright and right of final interpretation. Version: A/2 Date: 2023-07-10 Page 5 of 6





Note:

1. The product should be used under the specification range, otherwise it will cause permanent damage to it.

2. If the product worked beyond the load range or below the minimum load, we cannot ensure that the performance of product is in accordance with all the indexes in this manual;

3. Unless otherwise specified, data in this datasheet should be tested under conditions of Ta=25°C, humidity<75% when inputting nominal voltage and outputting rated load(pure resistance load);

4. All index testing methods in this datasheet are based on our Company's corporate standards

5. The performance indexes of the product models listed in this manual are as above, but some indexes of non-standard model

products will exceed the above-mentioned requirements, and please directly contact our technician for specific information;

6. We can provide customized product service;

7. The product specification may be changed at any time without prior notice. Please pay attention to the latest manual published on our official website.

Guangzhou Aipu Electron Technology Co., Ltd

Address: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, China. Tel: 86-20-84206763 Fax: 86-20-84206762 HOTLINE: 400-889-8821 E-mail: sales@aipu-elec.com Website: www.aipupower.com