

Typical Features

- ◆ Wide input voltage range 2.4 : 1
- ◆ Efficiency 92% (Typ.)
- ◆ Low standby power consumption
- ◆ Operating Temperature from -40°C to +105°C
- ◆ High isolation voltage 3000VDC(input-output) & 2100VDC(input-case)
- ◆ Input under voltage protection, output over current, over voltage, over temp. & short circuit protections
- ◆ Standard 1/2 brick size

Conform to CE

ZBD250-110S48 is a high-performance DC-DC converter with rated input voltage 110VDC (full range from 66V to 160VDC), regulated single output 48V/250W without minimum load limit. It has the advantages of high isolation voltage, Max operating temperature up to 105°C, with input under-voltage protection, output over-current, over-voltage, over-temperature and short circuit protections, input remote control, output voltage distal end compensation and Trim, etc.

Typical Product List							
Part No.	Input voltage range (VDC)	Output Power (W)	Output Voltage (VDC)	Output Current (A)	Ripple & Noise (mVp-p)	Full load Efficiency (%) Min/Typ.	Remark
ZBD250-110S48C	66-160	250	48	5.2	480	90/92	Positive logic Standard
ZBD250-110S48N							Negative logic Standard
ZBD250-110S48C-H							Positive logic With heat sink
ZBD250-110S48N-H							Negative logic With heat sink

Input Specifications					
Item	Operating conditions	Min.	Typ.	Max.	Unit
Input current Max	Input 66VAC, 250W output	--	--	5.8	A
No-load current	Rated input voltage	--	--	15	mA
Input inrush voltage (1sec. max.)	Unit could be permanently broken over this voltage	-0.7	--	185	VDC
Start-up voltage		--	--	66	
Under-voltage protection	With No-load (over current protection should start in advance at full load)	--	--	64	
Remote control (CNT)	Positive logic: CNT no connection or connected to 3.5-15V to turn on, connected to 0-1.2V to shut off the converter.			Reference voltage - -Vin	
	Negative logic: CNT no connection or connected to 3.5-15V to shut off, connected to 0-1.2V voltage to turn on the converter.				

Output Specifications

Item	Operating conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	Nominal input voltage, 0%-100% load	--	±0.2	±1.0	%
Line Regulation	Full load, input voltage from low to high	--	±0.1	±0.2	
Load Regulation	Nominal input voltage, 10%-100% load	--	±0.1	±0.2	
Transient recovery time	25% load step change (step rate 1A/50uS)	--	200	250	uS
Transient Response Deviation		-5	--	+5	%
Temperature Drift Coefficient	Full load	-0.02	--	+0.02	%/°C
Ripple & Noise	20M bandwidth, test with ≥220uF capacitor	--	240	480	mVp-p
Output voltage adjustment (TRIM)		-10	--	+10	%
Distal end compensation (Sense)		--	--	+5	%
Over temperature protection	Maximum temperature of the Metal base	105	115	125	°C
Output over voltage protection		125	--	140	%
Output over current protection		5.7	--	7.2	A
Output short circuit protection		Hiccup, continuous, self-recovery			

General Specifications

Item	Operating conditions		Min.	Typ.	Max.	Unit
Isolation voltage	I/P-O/P	Test 1min, leakage current < 3mA	--	--	3000	VDC
	I/P-Case	Test 1min, leakage current < 3mA	--	--	2100	VDC
	O/P-Case	Test 1min, leakage current < 3mA	--	--	500	VDC
Insulation resistance	I/P-O/P	@ 500VDC	100	--	--	MΩ
Switching frequency			--	300	--	KHz
MTBF	MIL-HDBK-217F@25°C		150	--	--	K hours

Environmental characteristics

Item	Operating conditions	Min.	Typ.	Max.	Unit
Operating Temperature	Refer to the temperature derating curve	-40	--	+105	°C
Storage Humidity	No condensing	5	--	95	%RH
Storage Temperature		-40	--	+125	°C
Pin Soldering temperature	1.5mm from the case, < 1.5S	--	--	+350	
Cooling requirement		EN60068-2-1			
Dry and heat requirement		EN60068-2-2			
Moisture and heat requirement		EN60068-2-30			
Shock and vibration		IEC/EN 61373 C1/Body Mounted Class B			



EMC Performances (EN50155)

EMI	CE	EN50121-3-2	150kHz-500kHz 79dBuV	
		EN55016-2-1	500kHz-30MHz 73dBuV	
	RE	EN50121-3-2	30MHz-230MHz 40dBuV/m at 10m	
		EN55016-2-1	230MHz-1GHz 47dBuV/m at 10m	
EMS	ESD	EN50121-3-2	Contact ±6KV/Air ±8KV	perf. Criteria A
	RS	EN50121-3-2	10V/m	perf. Criteria A
	EFT	EN50121-3-2	±2kV 5/50ns 5kHz	perf. Criteria A
	Surge	EN50121-3-2	Line to line ± 1KV (42Ω, 0.5μF)	perf. Criteria A
	CS	EN50121-3-2	0.15MHz-80MHz 10 V r.m.s	perf. Criteria A



Physical Characteristics

Case Materials	Metal bottom shell + Plastic case in black with flame class UL94 V-0
Heat Sink	Dimension 61.0x57.9x15.0mm, weight 65g, Aluminum alloy, anodized black
Cooling Method	Conduction cooling or forced air cooling with fan
Weight	Standard 120g, with heatsink 188g


Mechanical Dimensions and Pin-out function description

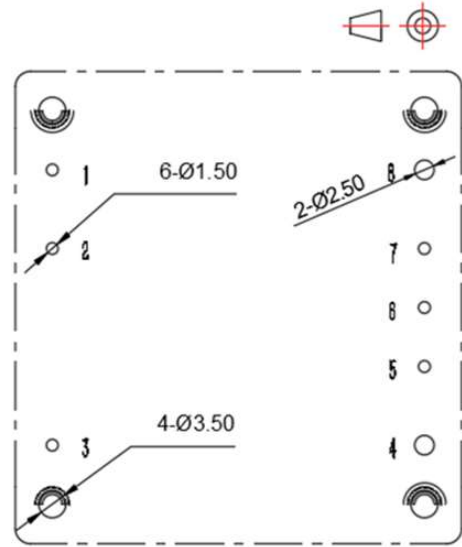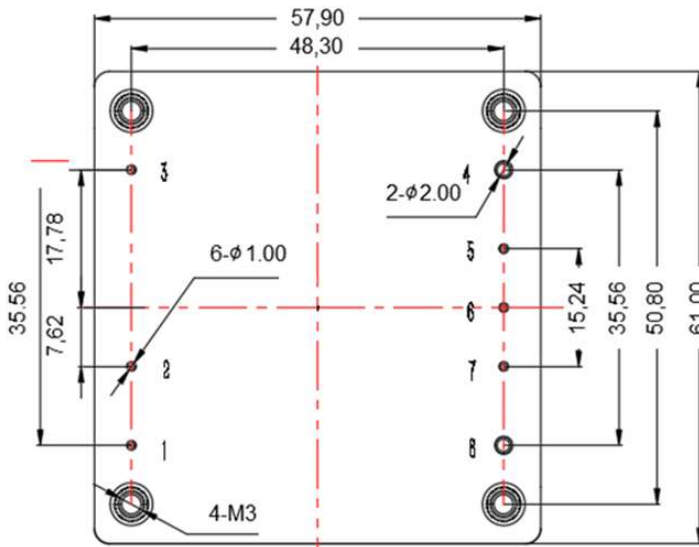

Recommended holes for PCB

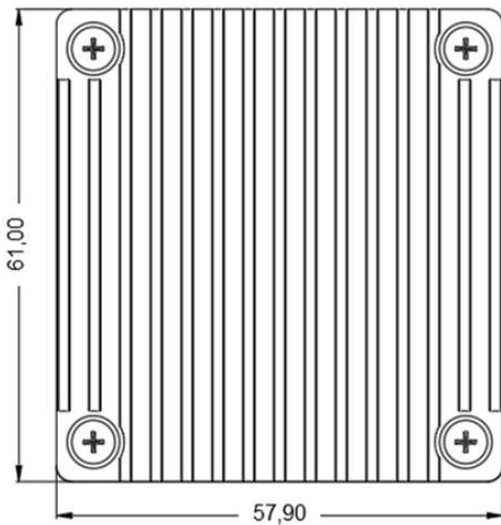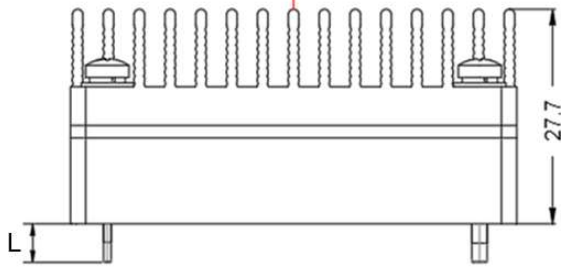


Standard+Heat sink
61.0x57.9x27.7

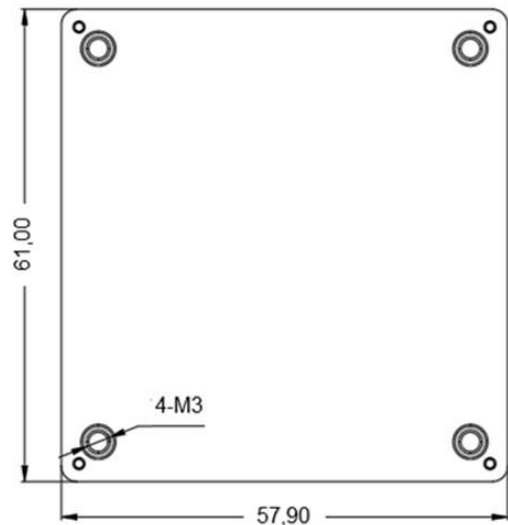

Standard
61.0x57.9x12.7mm



Note:
Unit: mm
Pin 1,2,3,5,6,7 diameter: 1.00mm
Pin 4,8 diameter: 2.00mm
Tolerance: X.X ±0.5mm, X.XX ±0.1mm
Screwing torque: 0.4N.m Max

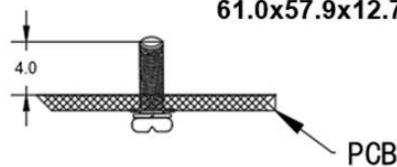

Pins length L=5.4mm

Pin No.	1	2	3	4	5	6	7	8
Function	Vin+	CNT	Vin-	Vout-	-Sense	TRIM	+Sense	Vout+

Product Performance Curves

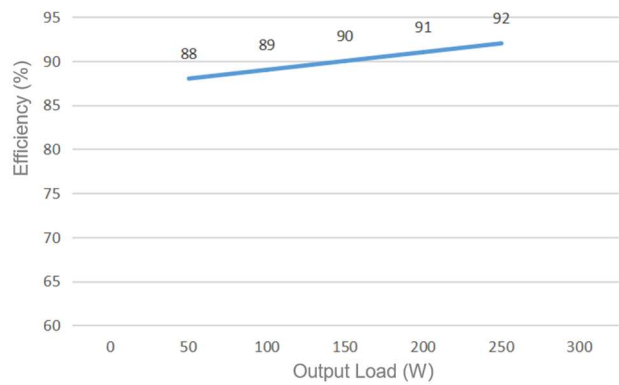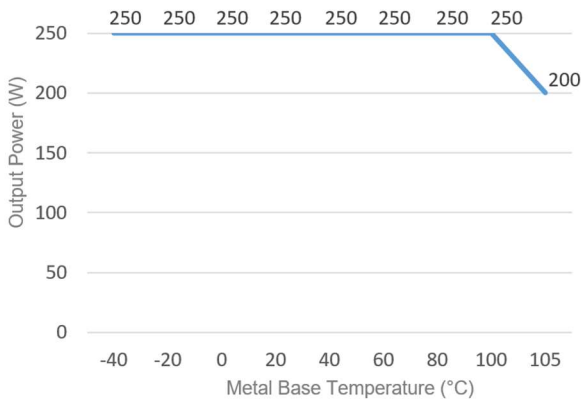


- Note:
- Both the output power and efficiency in the curves had been tested with typical values.
 - The data in temperature derating curve had been tested at Aipu laboratory test conditions. It is recommended to keep the temperature of the Metal base not more than 100 °C when the converter operates at the rated load for the customer application.

Recommended circuits for application

1. Ripple & Noise


All the products will be tested according to this circuit below before shipping.

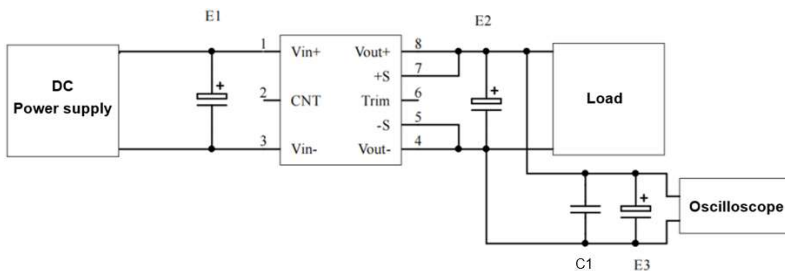

Capacitance	E1 (μF)	E2 (μF)	C1 (μF)	E3 (μF)
3.3VDC	100	1000	1	10
5VDC		680		
12VDC		220		
.....				
48VDC	68	68		
.....				
110VDC				


2. Recommended circuit for application

If this circuit recommended below is not adopted, an electrolytic capacitor $\geq 100 \mu\text{F}$ should be connected at the input to suppress the possible surge voltage.

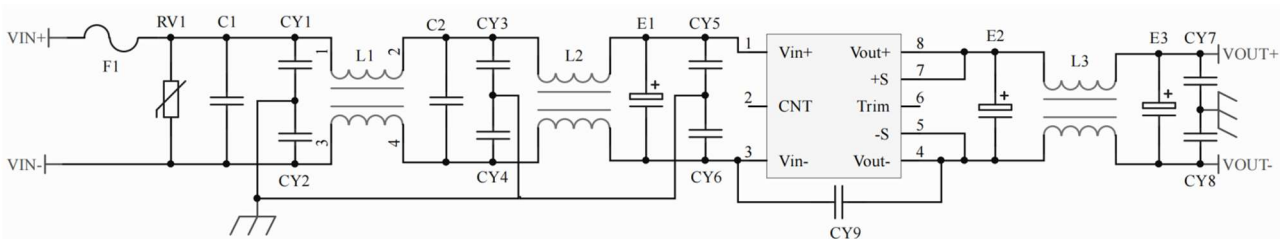


F1	T10A/250V FUSE
RV1	14D 200V Varistor
C1, C2	105/450V Polyester film capacitor
CY1, CY2, CY3, CY4, CY5, CY6	102/250Vac Y2 capacitor
CY7, CY8	103/2KV Ceramic capacitor
CY9	471/250Vac Y1 capacitor
E1	100μF/200V Electrolytic capacitor
E2, E3	220μF/63V Electrolytic capacitor
L1, L2	>5mH, temperature rise less than 25° @5.8A
L3	>220uH, temperature rise less than 25° @5.2A

3. Recommended circuits for the Remote control (CNT)

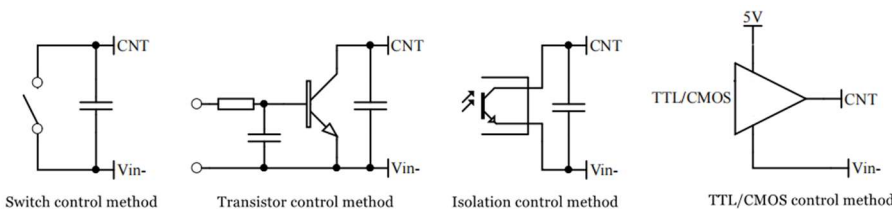

4. Application for Sense


1) With NO distal end compensation

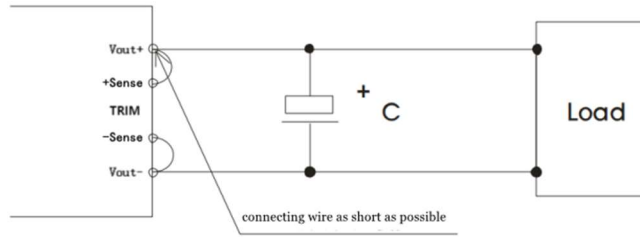

Note:

1. Vout+ & Sense+, Vout- & Sense- should be shorted when distal end compensation is not needed
2. The lead wire between Vout+ and Sense+, Vout- and Sense- should be as short as possible, and close to the pins, or else the output may be unstable.

2) With distal end compensation

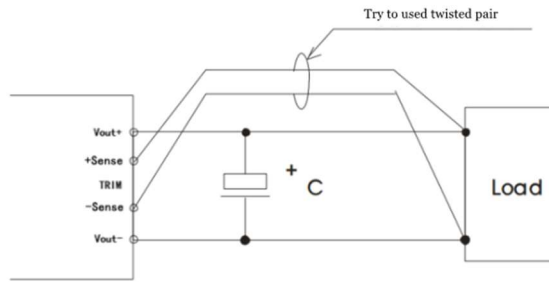

Notes:


1. The output voltage may be unstable if the compensation cables are too long.
2. The twisted pair or shielded cables are recommended, the cable length should be as short as possible.
3. Wide copper path on PCB or thick lead wires between the power supply and the load should be used to achieve the line voltage drop <0.3V. The target is to keep output voltage within the specified range.
4. The leads wire resistance may create the output voltage oscillation or larger ripples. Please verify it before to use.

5. TRIM and calculation of TRIM resistance


The calculation of ΔU and Rup & Rdown:

$$R_{up} = 107.5 / \Delta U - 5.1 \text{ (K}\Omega\text{)}$$

$$R_{down} = 43 * (48 - 2.5 - \Delta U) / \Delta U - 5.1 \text{ (K}\Omega\text{)}$$



Voltage-up: Add Rup between Trim and Vout-



Voltage-down: Add Rdown between Trim and Vout+

6. This product is not available for connection in parallel to increase the output power. Please contact Aipu technician for this kind of requirement.

Others

1. The product warranty period is two years. The failed product can be repaired/replaced free of charge if it operates at normal condition. A paid service shall be also provided if the product failed after operating under wrong or unreasonable conditions.
2. Aipupower can provide customization design and filter modules for matching, please contact our technician for details.

Guangzhou Aipu Electron Technology Co., Ltd

Address: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, China.

Tel: 86-20-84206763 Fax: 86-20-84206762 HOTLINE: 400-889-8821

E-mail: sales@aipu-elec.com Website: <https://www.aipupower.com>