

| Typical Features |   |
|------------------|---|
| ◆                | Wide input voltage range 85-305VAC/120-430VDC                 |
| ◆                | No load power consumption ≤0.3W                               |
| ◆                | Efficiency 83%(TYP.)  |
| ◆                | Operating Temperature from -40℃ to +105℃                      |
| ◆                | Switching Frequency 65KHz                                     |
| ◆                | Short circuit & over current protections                      |
| ◆                | Isolation voltage 4000VAC                                     |
| ◆                | Altitude during operation 4000m Max                           |
| ◆                | Compliant with IEC/EN62368/UL62368, IEC61558-1/ IEC61558-2-16 |
| ◆                | With TUV/CE, CB & UL Certificates                             |
| ◆                | PCB DIP Mounting  |



**Application Field**

**FA10-220SXXG2N4(-T)(-TS) Series** ----- Compact size & high efficiency modular power supplies with global adapted input voltage range (both AC & DC available), low ripple, low temperature rise, low standby power consumption, high efficiency, high reliability, safety isolated and good EMC performance. This series of products can be widely used in the fields of electric power, industrial, instrument, smart home devices, etc. The additional circuit for EMC is recommended in this data sheet for the application with high EMC requirement.

**Typical Product List**

| Certificate | Part No.          | Output Specifications |         |         | Max. Capacitive Load<br>220VAC<br>uF | Ripple & Noise<br>20MHz<br>(Max)<br>mVp-p | Efficiency@ Full Load,<br>220VAC<br>(Typical)<br>% |
|-------------|-------------------|-----------------------|---------|---------|--------------------------------------|---|--|
|             |                   | Power                 | Voltage | Current |                                      |   |  |
|             |                   | (W)                   | Vo(V)   | Io(mA)  |                                      |   |  |
| CE          | FA10-220S3V3G2N4  | 8.6                   | 3.3     | 2600    | 5000                                 | 100                                       | 73   |
| CE/CB/UL    | FA10-220S05G2N4   | 10                    | 5       | 2000    | 5000                                 | 100                                       | 76   |
| CE/CB/UL    | FA10-220S12G2N4   | 10                    | 12      | 833     | 3000                                 | 120                                       | 82   |
| CE/CB/UL    | FA10-220S12V5G2N4 | 10                    | 12.5    | 800     | 3000                                 | 120                                       | 82   |
| CE/CB/UL    | FA10-220S15G2N4   | 10                    | 15      | 667     | 3000                                 | 120                                       | 82   |
| CE/CB/UL    | FA10-220S24G2N4   | 10                    | 24      | 416     | 2000                                 | 150                                       | 83   |

Note 1 - The typical value of efficiency is based on the product tested after half an hour burn-in at full load.  
 Note 2 - The full load efficiency should be in ±2% of the typical value in this table. The efficiency is calculated by the way that the full output power is divided by the input power.  
 Note 3 - Please contact Aipu sales for other output voltages requirement in this series but not listed in this table.  
 Note 4 - The suffix -T is for a kind of chassis packaging with terminals, -TS is for a kind of packaging of DIN Rail.

| Input Specifications      |   |                           |        |      |        |    |
|---------------------------|---|---------------------------|--------|------|--------|----|
| Item                      | Operating Condition   | Min                       | Typ.   | Max  | Unit   |    |
| Input Voltage Range       | AC input  | 85                        | 220    | 305  | VAC    |    |
|                           | DC input  | 120                       | 310    | 430  | VDC    |    |
| Input Frequency range     | -   | 47                        | 50     | 63   | Hz     |    |
| Input Current             | 115VAC  | -                         | -      | 0.25 | A      |    |
|                           | 220VAC  | -                         | -      | 0.15 |        |    |
| Surge Current             | 115VAC  | -                         | -      | 15   |        |    |
|                           | 220VAC  | -                         | -      | 30   |        |    |
| No-load Consumption       | Input 115VAC  | -                         | -      | 0.3  | W      |    |
|                           | Input 220VAC  | -                         | -      |      |        |    |
| Leakage Current           | -   | 0.25mA TYP/230VAC/50Hz    |        |      |        |    |
| Recommended External Fuse | -   | 2A/300VAC Time-delay fuse |        |      |        |    |
| Hot Plug                  | -   | Unavailable               |        |      |        |    |
| Remote Control            | -   | Unavailable               |        |      |        |    |
| Output Specifications     |   |                           |        |      |        |    |
| Item                      | Operating Condition   | Min                       | Typ.   | Max  | Unit   |    |
| Voltage Accuracy          | Full input voltage range, any load  | -                         | ±2.0   | ±3.0 | %      |    |
| Line Regulation           | Rated load  | -                         | ±0.5   | ±1.0 | %      |    |
| Load Regulation           | Nominal input voltage, 20%~100% load  | -                         | ±1.0   | ±2.0 | %      |    |
| Minimum Load              | Single Output   | 0                         | -      | -    | %      |    |
| Turn-on Delay Time        | Input 115VAC (full load)  | -                         | 1000   | -    | mS     |    |
|                           | Input 220VAC (full load)  | -                         |        | -    |        |    |
| Power-off Hold-up Time    | Input 115VAC (full load)  | -                         | 50     | -    | mS     |    |
|                           | Input 220VAC (full load)  | -                         | 80     | -    |        |    |
| Dynamic Response          | Overshoot range   | 25%~50%~25%               | -5.0   | -    | +5.0   | %  |
|                           | Recovery time   | 50%~75%~50%               | -5.0   | -    | +5.0   | mS |
| Output Overshoot          | Full input voltage range  | ≤10%Vo                    |        |      | %      |    |
| Short circuit Protection  |   | Continuous, self-recovery |        |      | Hiccup |    |
| Temperature Drift         | -   | -                         | ±0.03% | -    | %/°C   |    |
| Over Current Protection   | Input 220VAC  | ≥120% Io, self-recovery   |        |      | Hiccup |    |
| Ripple & Noise            | Full input voltage range  | -                         | 80     | 150  | mV     |    |
|                           | The ripple and noise are tested by the twisted pair method. For details understood, please refer to the following Ripple & Noise Test Instructions. |                           |        |      |        |    |



**General Specifications**

| Item                  |              | Operating Condition                     | Min                             | Typ. | Max  | Unit |
|-----------------------|--------------|---|---------------------------------|------|------|------|
| Switching Frequency   |              | -                                       | -                               | 65   | -    | KHz  |
| Operating Temperature |              | Refer to the temperature derating curve | -40                             | -    | +105 | °C   |
| Storage Temperature   |              | -                                       | -40                             | -    | +110 | °C   |
| Soldering Temperature |              | Wave soldering                          | 260±4°C, time 5-10S             |      |      |      |
|                       |              | Manual soldering                        | 360±8°C, time 4-7S              |      |      |      |
| Relative Humidity     |              | -                                       | 10                              | -    | 90   | %RH  |
| Isolation Voltage     | Input-Output | Test 1min, leakage current ≤5mA         | 4000                            | -    | -    | VAC  |
| Insulation Resistance | Input-Output | @ DC500V                                | 100                             | -    | -    | MΩ   |
| Safety Standard       |              | -                                       | EN/IEC62368/UL62368/IEC61558    |      |      |      |
| Vibration             |              | -                                       | 10-55Hz,10G, 30Min, along X,Y,Z |      |      |      |
| Flame Class of Case   |              | -                                       | CLASS II                        |      |      |      |
| MTBF                  |              | -                                       | MIL-HDBK-217F@25°C > 300,000H   |      |      |      |
| Unit Weight           |              | Part No.                                | Weight (Typ.)                   |      |      |      |
|                       |              | FA10-220SXXG2N4                         | 35g                             |      |      |      |
|                       |              | FA10-220SXXG2N4-T                       | 50g                             |      |      |      |
|                       |              | FA10-220SXXG2N4-TS                      | 70g                             |      |      |      |

**EMC Performance**

| Total Item | Sub Item | Test Standard                | Performance/Class   |   |
|------------|----------|------------------------------|---|---|
| EMC        | EMI      | CE                           | CISPR32/EN55032 CLASS B ( with the Recommended Circuit 2) |   |
|            |          | RE                           | CISPR32/EN55032 CLASS B ( with the Recommended Circuit 2) |   |
|            | EMS      | RS                           | IEC/EN61000-4-3   | 10V/m Perf.Criteria B ( with the Recommended Circuit 2)                                   |
|            |          | CS                           | IEC/EN61000-4-6   | 3Vr.m.s Perf.Criteria B ( with the Recommended Circuit 2)                                 |
|            |          | ESD                          | IEC/EN61000-4-2   | Contact ±6KV / Air ±8KV Perf.Criteria B   |
|            |          | Surge                        | IEC/EN61000-4-5   | Line to line ±1KV Perf. Criteria B  |
|            |          |                              |   | Line to line ±2KV / line to ground ±4KV Perf.Criteria A ( with the Recommended Circuit 2) |
|            |          | EFT                          | IEC/EN61000-4-4   | ±2KV Perf.Criteria B<br>±4KV Perf.Criteria A ( with the Recommended Circuit 2)            |
|            |          | Voltage dips & interruptions | IEC/EN61000-4-11  | 0%~70% Perf.Criteria B  |


**Mechanical Dimensions**

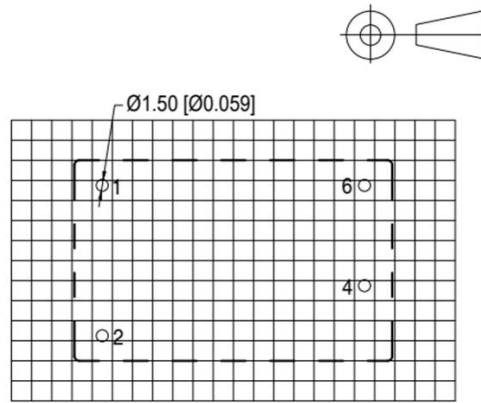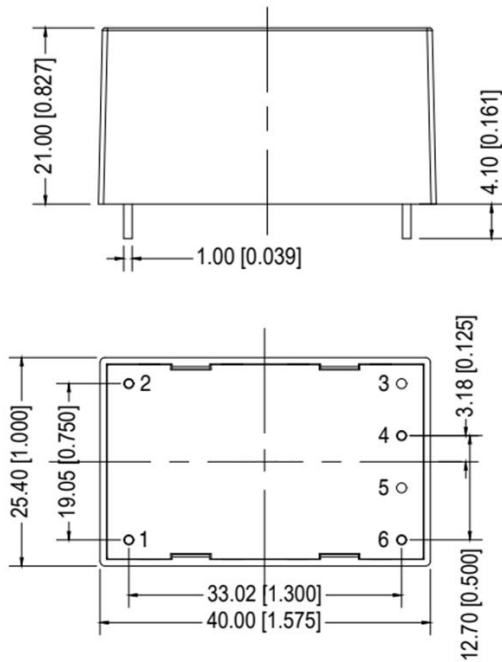

| Pin No. | Description |
|---------|-------------|
| 1       | AC(L)       |
| 2       | AC(N)       |
| 3       | No Pin      |
| 4       | +Vout       |
| 5       | No Pin      |
| 6       | -Vout       |

Note:  
 Unit: mm [inch]  
 Pin diameter tolerance:  $\pm 0.10$  [ $\pm 0.004$ ]  
 General tolerance:  $\pm 0.50$  [ $\pm 0.020$ ]


**-T Mechanical Dimensions**

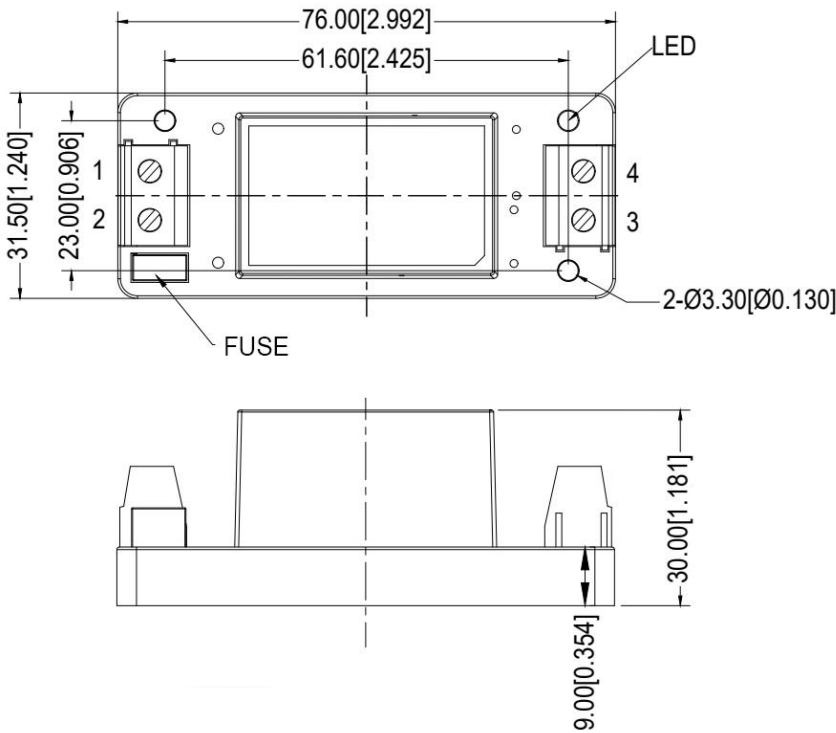

| Terminal No. | Description |
|--------------|-------------|
| 1            | AC(L)       |
| 2            | AC(N)       |
| 3            | -Vout       |
| 4            | +Vout       |

Note:  
 Unit: mm[inch]  
 Lead Wire Size: 24-12AWG  
 Screwing torque: 0.4 N.m Max  
 General tolerance:  $\pm 1.00$  [ $\pm 0.039$ ]

**-TS Mechanical Dimensions**

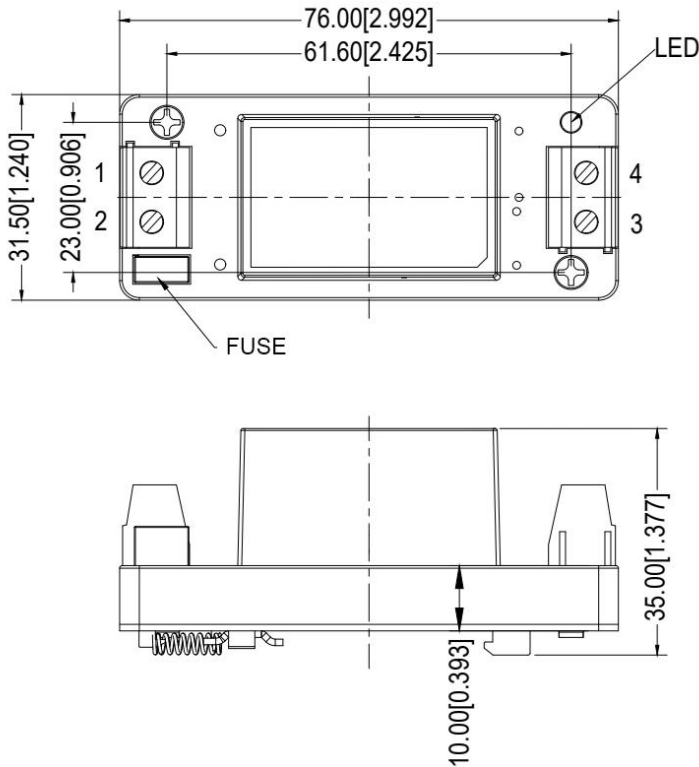

| Terminal No. | Description |
|--------------|-------------|
| 1            | AC(L)       |
| 2            | AC(N)       |
| 3            | -Vout       |
| 4            | +Vout       |

Note:

Unit: mm[inch]

Lead Wire Size: 24-12AWG

Screwing torque: 0.4 N.m Max


General tolerance: ±1.00 [±0.039]

| Packaging Code | Dimensions L x W x H     |                            |
|----------------|--------------------------|----------------------------|
| -              | 40.00 x 25.40 x 21.00 mm | 1.575 × 1.000 × 0.827 inch |
| -T             | 76.00 x 31.50 x 30.00 mm | 2.992 x 1.240 x 1.181 inch |
| -TS            | 76.00 x 31.50 x 35.00 mm | 2.992 x 1.240 x 1.377 inch |




**Ripple & Noise Test Instructions (Twisted Pair Method, 20MHz Bandwidth)**

1) The Ripple & noise test needs 12# twisted pair cables, an oscilloscope which bandwidth should be set to 20MHz, 0.1uF polypropylene capacitor and 10uF high-frequency low-resistance electrolytic capacitor are connected in parallel with the probes (100M bandwidth). The oscilloscope should be set at the Sample Mode.

2) The test diagram is shown on the right. The converter output connects to the electronic load by the jig with cables which size should be defined according to the output current value. The twisted pair (length 30cm ± 2 cm) should be connected in parallel with the load, the location is as close as possible to the output pins or terminals. The test can be started after input power on.

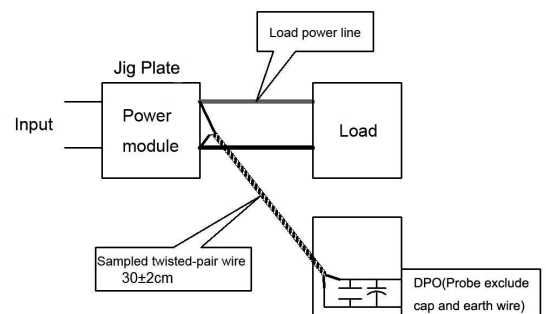

### Product Performance Curves

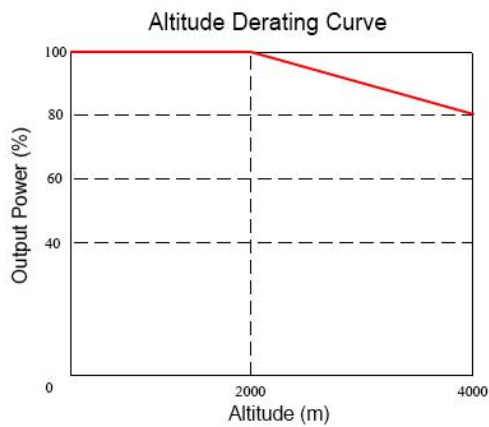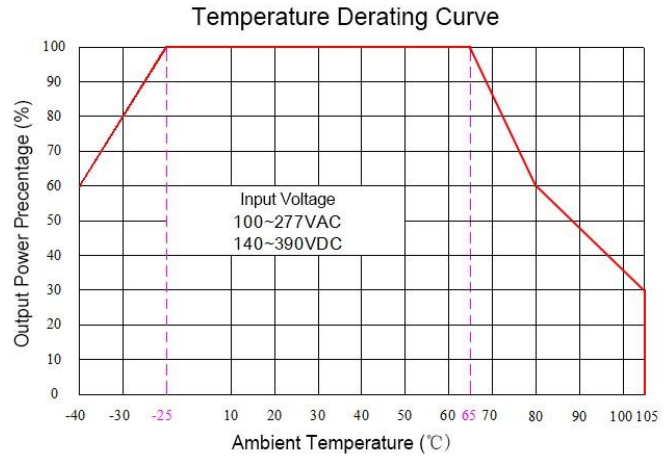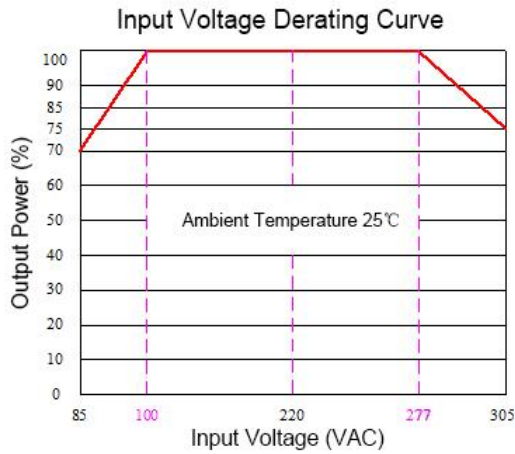


Note 1 - The output power should be derated based on the input voltage derating curve at 85~100VAC/277~305VAC/120~140VDC/390~430VDC.

Note 2 - This product should operate at a natural air condition, please contact us if it need be used at a closed space.

### Recommended Circuits for Application

#### 1. Typical Application Circuit

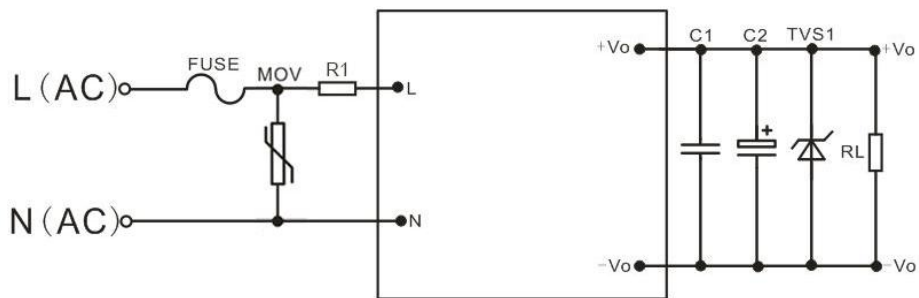


Circuit 1

| Part Number      | FUSE (necessary) | MOV     | R1                                | C1      | C2        | TVS1     |
|------------------|------------------|---------|-----------------------------------|---------|-----------|----------|
| FA10-220S3V3G2N4 | 2.0A/300V        | 14D561K | 6.8 Ω/3W<br>(Wire-wound resistor) | 1uF/50V | 220uF/16V | SMBJ7.0A |
| FA10-220S05G2N4  |                  |         |                                   |         |           | SMBJ20A  |
| FA10-220S12G2N4  |                  |         |                                   |         | 100uF/25V | SMBJ20A  |
| FA10-220S15G2N4  |                  |         |                                   |         | 100uF/35V | SMBJ30A  |
| FA10-220S24G2N4  |                  |         |                                   |         | 100uF/35V | SMBJ30A  |

**Note:**

1. A high-frequency low-resistance electrolytic capacitor is recommended for C2 which capacitance and current should be referred to the manufacturer’s technical specification, the withstand voltage should be derated to at least 80%.
2. Ceramic SMD capacitor is recommended for C1 which can suppress the high-frequency noise.
3. TVS is recommended to protect output circuit while the converter operating at abnormal condition.

**2. EMC recommended circuit (for higher EMC requirement)**

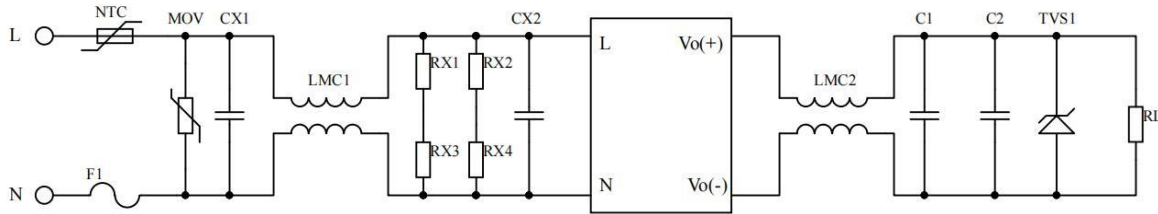

**Circuit 2**

**Note:**

1. 2A/300Vac time-delay fuse is recommended.
2. 14D561K is recommended for MOV.
3. 10D-11 is recommended for NTC to protect the converter against the lightning surge.
4. Both LMC1 & LCM2 are common mode chocks, 30mH recommended for LCM1 and 40uH for LCM2.
5. 0.22uF/275Vac X-capacitor is recommended for CX1, 0.1uF/275Vac X-capacitor is recommended CX2.
6. 1206/1MΩ SMD resistors are recommended for RX1, RX2, RX3, RX4.
7. A high-frequency low-resistance electrolytic capacitor is recommended for C1 which capacitance should be less than the max capacitive load, and the withstand voltage should be more than 1.5X of the output voltage.
8. 0.1uF ceramic SMD capacitor for C2, the withstand voltage should be more than 1.5X of the output voltage.
9. TVS1 - SMBJ7.0A is recommended for 5V output, SMBJ12.0A for 9V output, SMBJ20A for 12V/12.5V/15V outputs, SMBJ30.0A for 24V output and SMBJ64A for 48V output.

**Application Notice**

1. The products should be used according to the specifications in this datasheet, otherwise it could be permanently damaged.
2. A fuse should be connected at input.
3. The product performance in this datasheet cannot be guaranteed if it works at a lower load than the minimum load defined.
4. The product performance in this datasheet cannot be guaranteed if it works at over-load condition.
5. Unless otherwise specified, all values or indicators in this datasheet are tested at Ta=25°C, humidity<75%RH, nominal input voltage and rated load (pure resistance load).
6. All values or indicators in this datasheet had been tested based on Aipupower test specifications.
7. The specifications are specially for the parts listed in this datasheet, any other non-standard model performances could be out of the specifications. Please contact our technician for specific requirements.
8. Aipupower can provide customization service.

**Guangzhou Aipu Electron Technology Co., Ltd**

Address: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, China.

Tel: 86-20-84206763 Fax: 86-20-84206762 HOTLINE: 400-889-8821

E-mail: sales@aipu-elec.com Website: [https:// www.aipupower.com](https://www.aipupower.com)