

Typical Features

- ◆ Fixed input voltage, Isolated & unregulated, Output power 1W
- ◆ Efficiency up to 86% (Typ.)
- ◆ Mini size SIP packaging
- ◆ Isolation Voltage 3000VDC
- ◆ Operating Temperature from -40°C to +105°C
- ◆ Plastic Case, flame class UL94 V-0



Test Condition: Unless otherwise specified, all parameter values had been tested at nominal input voltage, pure resistive rated load, and at room temperature 25°C.

Application Field

This series of products can be widely used in the fields of instrument, communication, pure digital circuit, general low frequency analog circuit, relay drive circuit, data exchange circuit, etc.

Typical Product List

Certificate	Part No.	Input Voltage Range (VDC)		Output Voltage/Current (Vo/Io)		Input Current (mA) Typ. @Nominal Voltage		Max. Capacitive Load uF	Ripple & Noise (20MHz) Max/Typ. mVp-p	Efficiency (%) @full load/nom. voltage	
		Nom.	Range	Vo (VDC)	Io(mA) Max/Min	Full Load	No Load			Min	Typ.
-	FN1-3V3S3V3B3N	3.3	2.97 - 3.63	3.3	303/30	370	8	2400	75/30	74	78
-	FN1-3V3S05B3N			5	200/20	358	8	2400	75/30	79	83
-	FN1-3V3S12B3N			12	84/9	340	10	560	75/30	81	85
-	FN1-3V3S15B3N			15	67/7	345	20	560	75/30	79	83
-	FN1-3V3S24B3N			24	42/4	360	20	220	100/50	79	83
CE	FN1-05S3V3B3N	5	4.5 - 5.5	3.3	303/30	250	8	2400	75/30	76	80
CE/CB/UL	FN1-05S05B3N			5	200/20	225	8	2400	75/30	81	85
CE	FN1-05S09B3N			9	111/12	227	10	1000	75/30	81	85
CE	FN1-05S12B3N			12	84/9	220	10	560	75/30	81	85
CE	FN1-05S15B3N			15	67/7	220	18	560	100/50	81	85
CE	FN1-05S24B3N			24	42/4	266	18	220	75/30	80	84
-	FN1-05D3V3B3N			±3.3	±152/±15	250	8	1200	75/30	74	78
-	FN1-05D05B3N			±5	±100/±10	225	8	1200	75/30	79	83
-	FN1-05D09B3N			±9	±56/±6	227	10	470	75/30	81	85
-	FN1-05D12B3N			±12	±42/±5	220	10	220	75/30	81	85
-	FN1-05D15B3N			±15	±34/±4	220	18	220	75/30	81	85
-	FN1-05D24B3N			±24	±21/±2	266	18	100	100/50	79	83

-	FN1-09S09B3N	9	8.1	9	111/12	128	10	1000	75/30	80	84
-	FN1-09S12B3N		-	12	84/9	120	10	560	75/30	81	85
-	FN1-09S15B3N		9.9	15	67/7	120	10	560	75/30	81	85
-	FN1-12S3V3B3N	12	10.8 - 13.2	3.3	303/30	98	10	2400	75/30	80	82
-	FN1-12S05B3N			5	200/20	96	10	2400	75/30	84	86
-	FN1-12S09B3N			9	111/12	92	10	1000	75/30	84	86
CE/CB/UL	FN1-12S12B3N			12	84/9	90	10	560	75/30	84	86
-	FN1-12S15B3N			15	67/7	90	10	560	75/30	84	86
-	FN1-12S24B3N			24	42/4	92	10	220	100/50	83	85
-	FN1-12D3V3B3N			±3.3	±152/±15	98	10	1200	75/30	79	83
-	FN1-12D05B3N			±5	±100/±10	96	10	1200	75/30	80	82
-	FN1-12D09B3N			±9	±56/±6	92	10	470	75/30	84	86
CE	FN1-12D12B3N			±12	±42/±5	90	10	220	75/30	84	86
-	FN1-12D15B3N			±15	±34/±4	90	10	220	75/30	84	86
-	FN1-12D24B3N			±24	±21/±2	92	10	100	100/50	84	86
-	FN1-15S05B3N	15	13.5 - 16.5	5	200/20	78	10	2400	75/30	79	83
-	FN1-15S12B3N			12	84/9	76	10	1000	75/30	80	82
CE	FN1-15S15B3N			15	67/7	76	10	560	75/30	84	86
-	FN1-15D05B3N			±5	±100/±10	78	10	1200	75/30	84	86
-	FN1-15D09B3N			±9	±56/±6	76	10	1200	75/30	84	86
-	FN1-15D12B3N			±12	±42/±5	76	10	470	75/30	84	86
-	FN1-15D15B3N			±15	±34/±4	78	10	220	75/30	79	83
-	FN1-24S3V3B3N	24	21.6 - 26.4	3.3	303/30	48	8	2400	75/30	79	83
-	FN1-24S05B3N			5	200/20	47	8	2400	75/30	80	82
-	FN1-24S09B3N			9	111/12	48	8	1000	75/30	84	86
-	FN1-24S12B3N			12	84/9	48	8	560	75/30	84	86
-	FN1-24S15B3N			15	67/7	48	8	560	75/30	84	86
-	FN1-24S24B3N			24	42/4	49	8	220	100/50	84	86
-	FN1-24D05B3N			±5	±100/±10	48	8	1200	75/30	79	83
-	FN1-24D09B3N			±9	±56/±6	47	8	470	75/30	80	82
-	FN1-24D12B3N			±12	±42/±5	48	8	220	75/30	84	86
-	FN1-24D15B3N			±15	±34/±4	48	8	220	75/30	84	86
-	FN1-24D24B3N	±24	±21/±2	48	8	100	100/50	84	86		

Note: The ripple & noise are tested by the twisted pair method.

Input Specifications

Item	Operating Condition	Min.	Typ.	Max.	Unit
Input Inrush Voltage (1Sec max.)	3.3Vdc Input	-0.7	-	7	VDC
	5Vdc Input	-0.7	-	9	
	9Vdc Input	-0.7	-	12	
	12Vdc Input	-0.7	-	18	
	15Vdc Input	-0.7	-	21	
	24Vdc Input	-0.7	-	30	
Input Filter	Capacitor Filter				
Hot Plug	Unavailable				

Output Specifications

Item	Operating Condition	Min.	Typ.	Max.	Unit	
Output Power		0.1	--	1	W	
Output Voltage Accuracy	Please refer to the Output Voltage Deviation Graph (Figure 1)					
Load Regulation	10% ~ 100% load	3.3Vdc output	--	15	20	%
		Others	--	10	15	
Line Voltage Regulation	Input Voltage Change $\pm 1\%$	3.3Vdc output	--	--	1.5	--
		Others	--	--	1.2	
Temperature Drift Coefficient	100% Load	--	--	± 0.03	%/°C	
Short Circuit Protection	Continuous, self-recovery					


General Specifications

Item	Operating Condition	Min.	Typ.	Max.	Unit
Switching Frequency	Nominal input voltage, full load	--	260	--	KHz
Operating Temperature	Refer to the Temperature Derating Graph (Figure 2)	-40	--	+105	°C
Storage Temperature		-55	--	+125	
Case temperature rise	Ta=25°C	--	30°	--	
Pin soldering temperature	1.5mm from the case, 10S	--	--	300	
Relative Humidity	No condensing	5	--	95	%RH
Isolation Voltage	I/P-O/P, test 1 minute, leakage current <1mA	3000	--	--	VDC
Insulation Resistance	I/P-O/P, @ 500VDC	1000	--	--	MΩ
Isolation Capacitor	Input/Output, 100KHz/0.1V	--	20	--	pF
Vibration		10-150Hz, 5G, 30 Min. along X, Y and Z			
MTBF	MIL-HDBK-217F@25°C	3500	--	--	K hours
Case Material	Plastic in Black, flame class UL94-V0				
Unit Weight	2.5g (Typ.)				
Cooling Method	Natural air				
Packing	Tube size (525x18x10mm)	25PCS/Tube			
	Carton size (542x110x155mm)	2000PCS/Carton (Total 80 Tubes)			
Unit Dimensions	L x W x H	19.50 × 6.00 × 10.10 mm		0.768 × 0.236 × 0.398 inch	

EMC Performance

EMI	CE	CISPR32/EN55032 CLASS B (with the Recommended EMC circuit)
	RE	CISPR32/EN55032 CLASS B (with the Recommended EMC circuit)
EMS	ESD	IEC/EN61000-4-2 Air±8kV, Contact±6kV perf.Criteria B

Mechanical Dimensions

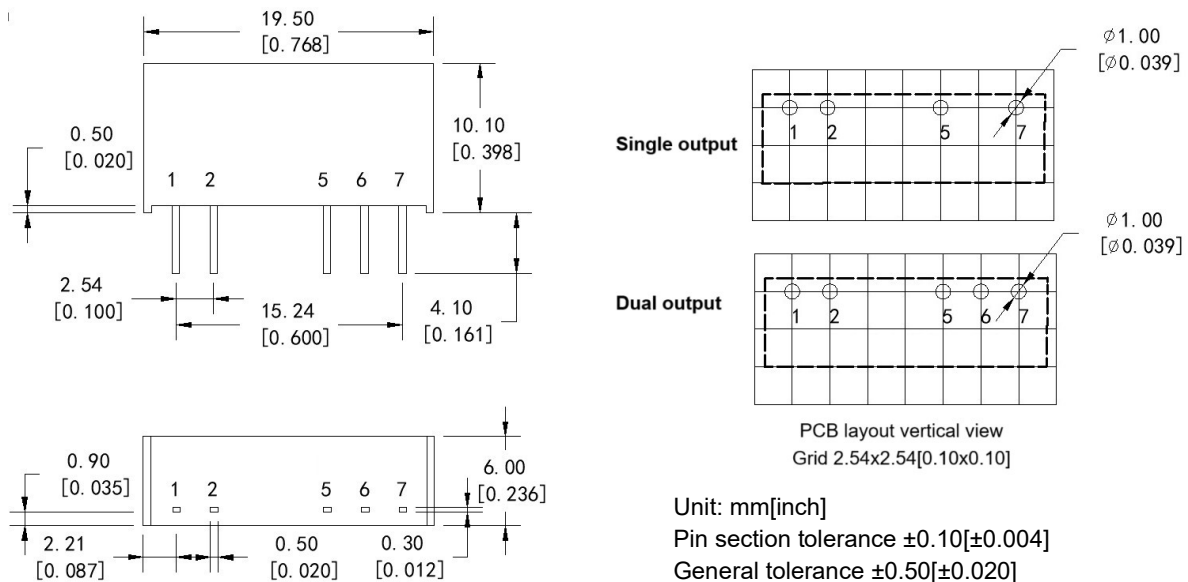

Pin Function Description


Pin No.	1	2	3, 7	4	5	6
Single output	+Vin	GND	No Pin	-Vo	No Pin	+Vo
Dual output	+Vin	GND	No Pin	-Vo	COM	+Vo

Note - Please take the pin definition on the product label as the right one if there is any difference between the data sheet and the one printed on the product label.

Ripple & Noise Test Instruction (Twisted Pair Method, 20MHZ bandwidth)

1) The Ripple & noise test needs 12# twisted pair cables, an oscilloscope which bandwidth should be set to 20MHz, 0.1uF polypropylene capacitor and 10uF high-frequency low-resistance electrolytic capacitor are connected in parallel with the probes (100M bandwidth). The oscilloscope should be set at the Sample Mode.

2) The test diagram is shown on the right. The converter output connects to the electronic load by the jig with cables which size should be defined according to the output current value. The twisted pair (length 30cm±2 cm) should be connected in parallel with the load, the location is as close as possible to the output pins or terminals. The test can be started after input power on.

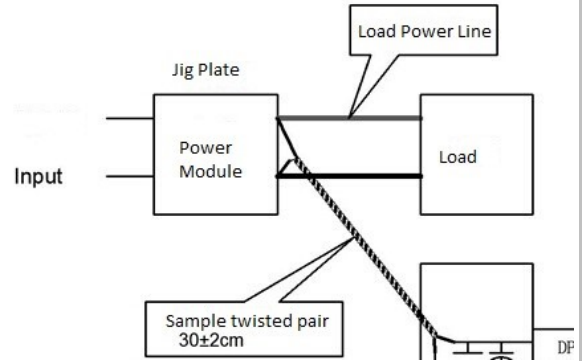

Product Characteristics Graphs

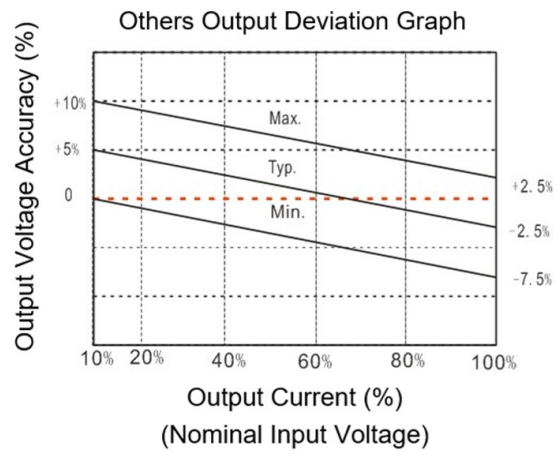
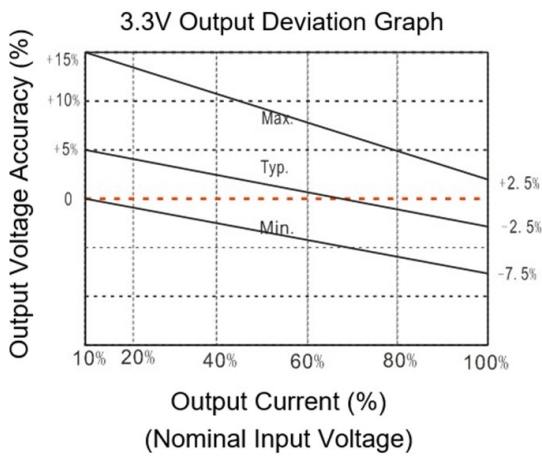


Figure 1

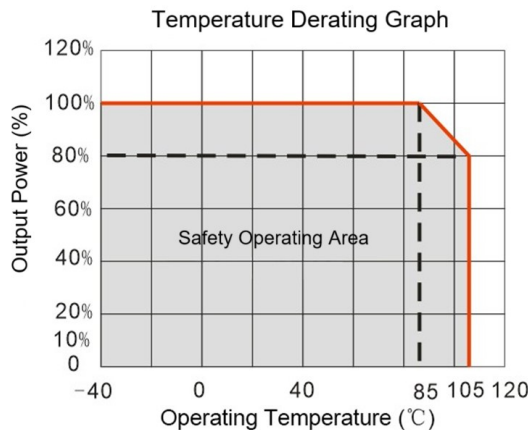


Figure 2

Recommended Circuits for Application


1. Requirement for Output load

The maximum capacitive load was tested at the rated full load. The converter may not start or be damaged if the output capacitors exceed this value.

2. Typical application circuit

To ensure effectively decrease the input and output ripple and noise, a capacitor filter can be connected at the input and output, the application circuit is shown in the figure below. The suitable filter capacitors should be chosen as the recommended capacitive load values in Table 1. The converter could not start if the capacitance is too big.

Single

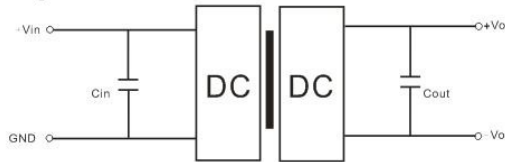


Dual




Recommended capacitive load value (Table 1)

Vin (Vdc)	Cin	Single Vout (Vdc)	Cout (μF)	Dual Vout (Vdc)	Cout (μF)
5	10 μF/16V	3.3	10 μF/16V	±3.3	4.7 μF/16V
12	2.2 μF/25V	5	10 μF/16V	±5	4.7 μF/16V
15	2.2 μF/25V	9	2.2 μF/25V	±9	2.2 μF/25V
24	1 μF/50V	12	2.2 μF/25V	±12	1 μF/25V
--	--	15	1 μF/25V	±15	1 μF/16V
--	--	24	1 μF/50V	±24	0.47 μF/50V

3. Recommended EMC Circuit

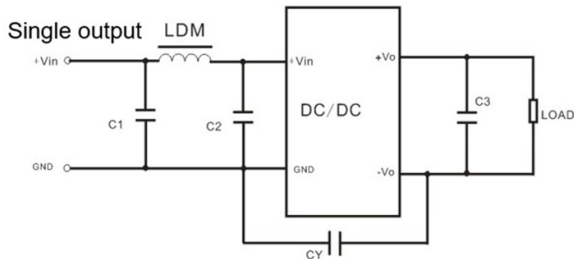


Input voltage		5VDC	12/15/24VDC
EMI	C1/C2	4.7 μF/16V	4.7 μF/50V
	CY	270pF/4KV	270pF/4KV
	C3	Refer to Cout in Table 1	
	LDM	6.8 μH	6.8 μH

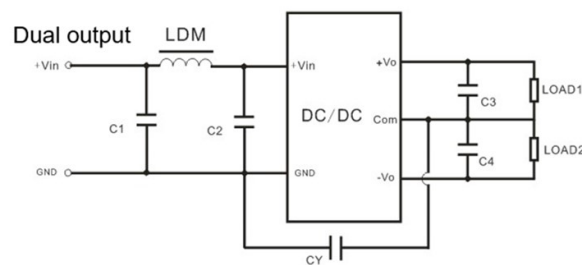


Input voltage		5VDC	12/15/24VDC
EMI	C1/C2	4.7 μF/16V	4.7 μF/50V
	CY	270pF/4KV	270pF/4KV
	C3/C4	Refer to Cout in Table 1	
	LDM	6.8 μH	6.8 μH

4. Output voltage regulation and overvoltage protection

The simple solution to achieve the output regulated voltage, over voltage and over current protections is to connect a linear regulator with overheat protection at input or output, and a capacitor filter connected in parallel as below circuit. Filter capacitive value recommended see table 1, Linear regulator should be chosen according to the actual voltage & current for operating. Or Aipu NW series products are recommended instead.

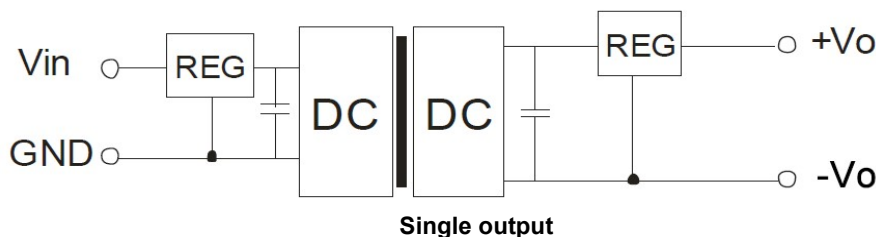

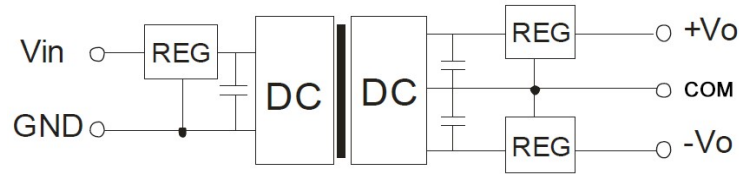

Dual output

Application Notice

1. This series of converters should not be used in parallel, and they do not support hot-plugging.
2. The product performance in this datasheet cannot be guaranteed if it works at a lower load than the minimum load condition.
3. All values or indicators in this datasheet had been tested based on Aipupower test specifications.

Guangzhou Aipu Electron Technology Co., Ltd

Address: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, China.

Tel: 86-20-84206763 Fax: 86-20-84206762 HOTLINE: 400-889-8821

E-mail: sales@aipu-elec.com Website: <https://www.aipupower.com>