

Typical Features

- ◆ Wide input voltage range 85-305VAC/120-430VDC
- ◆ Efficiency up to 90% (Typ.)
- ◆ No load power consumption 0.2W (Typ.) @220VAC
- ◆ Operating Temperature from -40℃ to +85℃
- ◆ Short circuit, over current & over voltage protections
- ◆ Isolation Voltage 4200Vac
- ◆ Altitude during operating 5000m Max
- ◆ Compliant with IEC/EN62368/UL62368
- ◆ PCB DIP Mounting



Application Field

FA30-220SXXG2N5 Series ---- Compact size, high efficiency modular power supplies with global adapted input voltage range (both AC & DC available), low ripple, low temperature rise, low standby power consumption, high efficiency, high reliability, safety isolated and good EMC performance. This series of products can be widely used in the fields of electric power, industrial, instrument, smart home devices, etc. The additional circuit for EMC is recommended in this data sheet for the application with high EMC requirement.

Typical Product List

Certificate	Part No.	Output Specification			Max. Capacitive Load	Ripple & Noise 20MHz (Max)	Efficiency @full load/220Vac (TYP)
		Power	Voltage	Current			
		(W)	Vo (V)	Io (A)	u F	mVp-p	%
-	FA30-220S3V3G2N5	19.8	3.3	6	6600	100	85
	FA30-220S05G2N5	30	5	6	6600	100	86
	FA30-220S09G2N5	30	9	3.33	4400	100	88
	FA30-220S12G2N5	30	12	2.5	4400	100	90
	FA30-220S15G2N5	30	15	2	3300	100	90
	FA30-220S24G2N5	30	24	1.25	1000	150	88
	FA30-220S48G2N5	30	48	0.625	470	150	90

Note 1 - Please contact Aipu sales for other output voltages requirements in this series but not in this table.

Note 2 - The typical value of efficiency is based on the product tested after half an hour burn-in at full load.

Note 3 - The full load efficiency should be in $\pm 2\%$ of the typical value in this table. The efficiency is calculated by the way that the full output power is divided by the input power.

Input Specifications

Items	Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	AC input	85	220	305	VAC
	DC input	120	310	430	VDC
Input Frequency Range	-	47	50	63	Hz
Input Current	115VAC	-	-	0.75	A
	220VAC	-	-	0.5	

Surge Current	115VAC	-	25	-	A
	220VAC	-	50	-	
No Load Power Consumption	Input 115VAC	-	-	0.45	W
	Input 220VAC	-	0.2		
Leakage Current	-	0.5mA TYP/230VAC/50Hz			
Recommended External Fuse	-	2.0A/300VAC, Time-delay fuse (To be used according to the actual situation)			
Hot Plug	-	Unavailable			
Remote Control	-	Unavailable			

Output Specifications

Items		Operating Conditions		Min.	Typ.	Max.	Unit
Voltage Accuracy		Full input voltage range, any load	Vo	-	±2.0	±3.0	%
Line Regulation		Nominal load	Vo	-	-	±1.0	%
Load Regulation		Nominal input voltage, 20%~100% load	Vo	-	-	±1.5	%
Minimum Load		Single Output		0	-	-	%
Turn-on Delay Time		Nominal input voltage (full load)		-	-	1500	mS
Power-off Hold up Time		Input 115VAC (full load)		8	-	-	mS
		Input 220VAC (full load)		65	-	-	
Dynamic Response	Overshoot range	25%~50%~25%		-10.0	-	+10.0	%
	Recovery time	50%~75%~50%		-	5.0	-	mS
Output Overshoot		Full input voltage range		≤10%Vo			%
Short-Circuit Protection				Continuous, Self-recovery			Hiccup
Temperature Drift Coefficient		-		-	±0.03%	-	%/℃
Over-current Protection		Input 220VAC		≥110% Io, self-recovery			Hiccup
Over-voltage Protection		3.3VDC output		≤6.3VDC			Hiccup
		5VDC output		≤16VDC			Hiccup
		9VDC output		≤16VDC			Hiccup
		12VDC output		≤16VDC			Hiccup
		15VDC output		≤25VDC			Hiccup
		24VDC output		≤35VDC			Hiccup
		48VDC output		≤63VDC			Hiccup
Ripple & Noise		Full input voltage range		-	60	150	mV
		Note -The ripple and noise are tested by the twisted pair method. For details understood, please refer to the following Ripple & Noise Test Instructions.					


General Specifications

Items	Operating Conditions	Min.	Typ.	Max.	Unit
Switching Frequency	-	-	75	-	KHz
Operating Temperature	Refer to the Temperature Derating Graph	-40	-	+85	℃
Storage Temperature	-	-40	-	+105	
Soldering Temperature	Wave soldering	260±4℃, timing 5-10S			
	Manual soldering	360±8℃, timing 4-7S			
Relative Humidity	-	10	-	90	%RH
Isolation Voltage	Input-Output, 1min, leakage current ≤5mA	4200	-	-	VAC
Insulation Resistance	Input-Output, @DC500V	100	-	-	MΩ
Safety Standard	-	EN62368, IEC62368			
Vibration	-	10-55Hz,10G,30 Min, along X,Y,Z			
Safety Class	-	CLASS II			
Case Flame Class	-	UL94V-0			
MTBF	MIL-HDBK-217F@25℃	>2,799 KH			
Unit Weight	Part No.	Weight (Typ.)			
	FA30-220SXXG2N5	100g			

EMC Performance

Total Items		Sub Items	Standard	Performance/Class
EMC	EMI	CE	CISPR32/EN55032	CLASS B (with the Recommended Circuit 1)
		RE	CISPR32/EN55032	CLASS B (with the Recommended Circuit 1)
	EMS	RS	IEC/EN61000-4-3	10V/m Perf.Criteria B (with the Recommended Circuit 1)
		CS	IEC/EN61000-4-6	3Vr.m.s Perf.Criteria B (with the Recommended Circuit 1)
		ESD	IEC/EN61000-4-2	Contact ±6KV / Air ±8KV Perf.Criteria B
		Surge	IEC/EN61000-4-5	Line to line ±2KV / line to ground ±4KV Perf.Criteria B (with the Recommended Circuit 1)
		EFT	IEC/EN61000-4-4	±2KV Perf.Criteria B
		Voltage dips & interruptions	IEC/EN61000-4-11	0%~70% Perf.Criteria B


Mechanical Dimensions

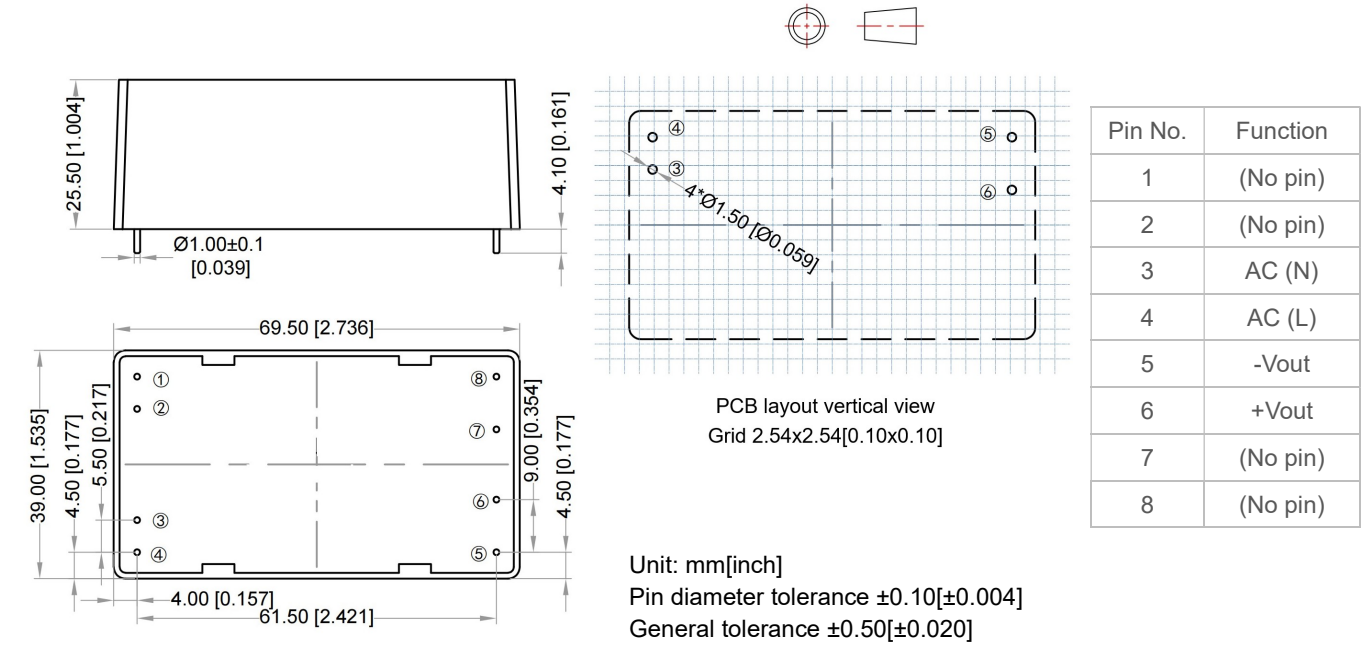


Packaging Code	Dimensions L x W x H	
-	69.50 X 39.00 X 25.50 mm	2.736 X 1.535 X 1.004 inch

Ripple & Noise Test Instruction (Twisted Pair Method, 20MHZ bandwidth)

- 1) The Ripple & noise test needs 12# twisted pair cables, an oscilloscope which bandwidth should be set to 20MHz, 0.1uF polypropylene capacitor and 10uF high-frequency low-resistance electrolytic capacitor are connected in parallel with the probes (100M bandwidth). The oscilloscope should be set at the Sample Mode.
- 2) The test diagram is shown on the right. The converter output connects to the electronic load by the jig with cables which size should be defined according to the output current value. The twisted pair (length 30cm \pm 2 cm) should be connected in parallel with the load, the location is as close as possible to the output pins or terminals. The test can be started after input power on.

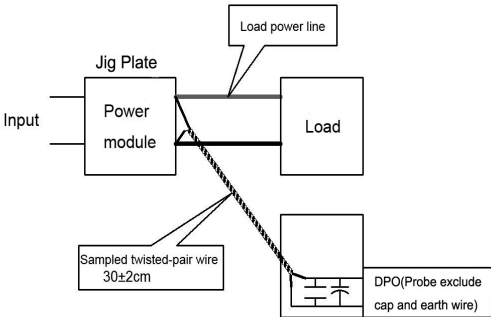


Product Characteristics Graphs

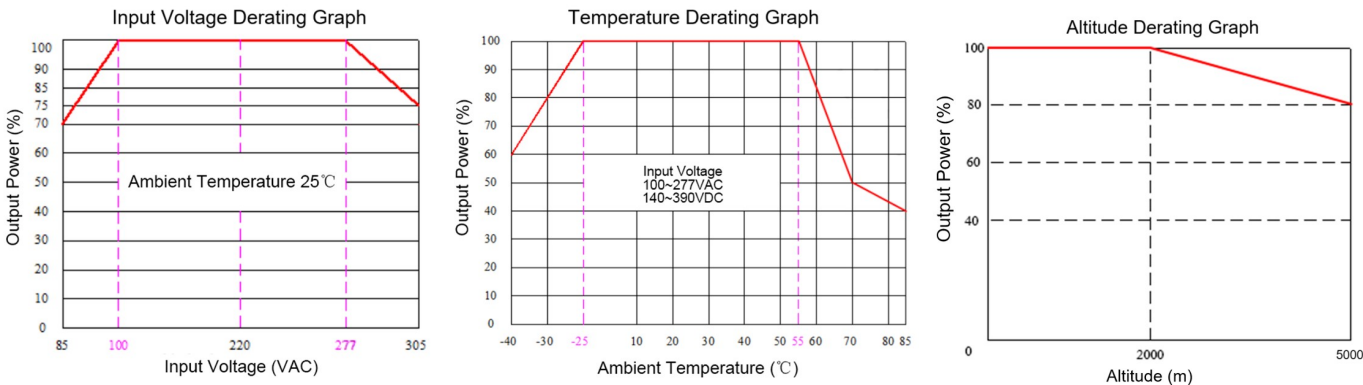

- Note 1 - The output power should be derated based on the input voltage derating curve at 85~100VAC/277~305VAC/120~140VDC/ 390~430VDC.
- Note 2 - This product should operate at a natural air condition, please contact us if it need be used at a closed space.

Recommended Typical EMC Circuit for Application

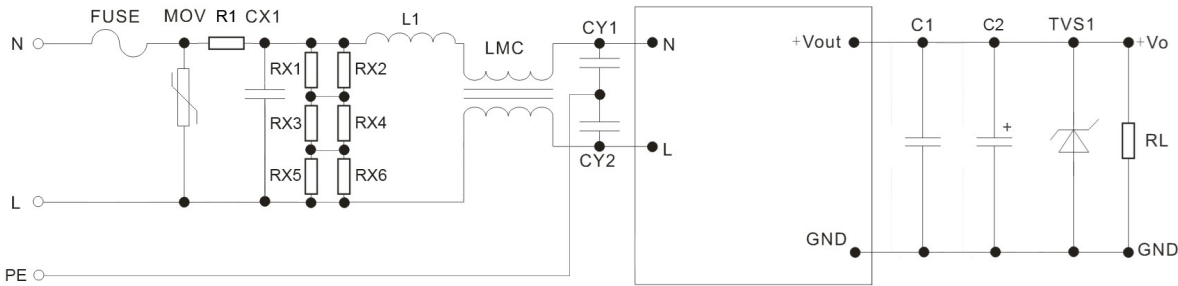

Circuit 1

Part No.	FUSE (*)	MOV	R1 (*)	CX1	RX1,RX2 RX3,RX4 RX5,RX6	L1	LMC	CY1 CY2	C1	C2	TVS1
FA30-220S3V3G2N5	3.15A/ 300V (Time- delay Fuse)	14D561K/ 4500A	6.8Ω /5W (Wire- wound Resistor	X2/ 334K/ 305VAC	1206/ 1.5M	1.2mH/ 0.75A	20mH 0.75A	Y1/ 2.2nF/ 400VAC	1uF /100V	10uF /50V	SMBJ7.0A
FA30-220S05G2N5											SMBJ7.0A
FA30-220S09G2N5											SMBJ12A
FA30-220S12G2N5											SMBJ20A
FA30-220S15G2N5											SMBJ20A
FA30-220S24G2N5											SMBJ30A
FA30-220S48G2N5										10uF /63V	SMBJ64A

Note - both * marked Fuse & R1 are necessary, not optional.

Application Notice

- 1.The products should be used according to the specifications in this datasheet, otherwise it could be permanently damaged.
2. A fuse should be connected at input.
3. The product performance in this datasheet cannot be guaranteed if it works at a lower load than the minimum load defined.
4. The product performance in this datasheet cannot be guaranteed if it works at over-load condition.
5. Unless otherwise specified, all values or indicators in this datasheet are tested at Ta=25°C, humidity<75%RH, nominal input voltage and rated load (pure resistance load).
6. All values or indicators in this datasheet had been tested based on Aipupower test specifications.
- 7.The specifications are specially for the parts listed in this datasheet, any other non-standard model performances could be out of the specifications. Please contact our technician for specific requirements.
8. Aipupower can provide customization service.

Guangzhou Aipu Electron Technology Co., Ltd

Address: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, China.
Tel: 86-20-84206763 Fax: 86-20-84206762 HOTLINE: 400-889-8821
E-mail: sales@aipu-elec.com Website: <https://www.aipupower.com>