

## Typical Features

- ◆ Wide input voltage range 100-1000VDC
- ◆ No-load power consumption  $\leq 0.4\text{W}$
- ◆ Switching frequency 65KHz
- ◆ Operating temperature from  $-30^{\circ}\text{C}$  to  $+70^{\circ}\text{C}$
- ◆ Efficiency 85% (Typ.)
- ◆ Input Anti-reverse, output over-current & short circuit protections
- ◆ Isolation voltage 4000VAC
- ◆ Altitude during operation 3000m Max
- ◆ Compliant with IEC/EN62368
- ◆ Conform to CE
- ◆ Enclosed plastic case, flame class UL94-V0



## Application Field

**BK15-500SXXH2N6 Series** - High efficiency & high reliability DC/DC modular converters with ultra-wide input voltage range from 100 to 1000VDC. This series of products can be widely used for the Solar power generation and High voltage inverter, etc. The multi-protection functions can keep the power supply and load safety while operating at abnormal conditions. The additional circuit diagram for EMC is recommended in this data sheet for the application with higher EMC requirement.

## Typical Product List

Certificate	Part No.	Output Specification			Capacitive Load Max. (200-1000VDC) ( $\mu\text{F}$ )	Ripple & Noise 20MHz (Max) mVp-p	Efficiency @Full load 500VDC (Typ.) %
		Power	Voltage	Current			
		(W)	Vo(V)	Io(mA)			
-	BK15-500S12H2N6	15	12	1250	2000	200	82
-	BK15-500S15H2N6	15	15	1000	2000	200	82
-	BK15-500S24H2N6	15	24	625	800	200	85

Note 1: The typical value of efficiency is based on the product tested after half an hour burn-in at full load.

Note 2: The full load efficiency should be in  $\pm 2\%$  of the typical value in this table. The efficiency is calculated by the way that the full output power is divided by the input power.

Note 3: The ripple and noise are tested by the twisted pair method according to the following test instruction.

Note 4: Please contact Aipu sales for other output voltages requirement in this series but not in this table.

Note 5: The suffix -T is for a kind of chassis package with terminals, -TS is for a kind of package of DIN Rail which width is 35mm.

## Input Specifications

Item	Operating Condition	Min.	Typ.	Max.	Unit
Input Voltage Range	DC Input	100	500	1000	VDC
Input Current	100VDC	-	0.305	-	A
	500VDC	-	0.060	-	

Surge Current	200VDC	-	7	-	
	600VDC	-	20	-	
No-load Power consumption	Input 100VDC	-	-	0.40	W
	Input 500VDC	-	-		
Recommended External Fuse	-	2A/1000V, necessary			
Hot Plug	-	N/A			
Remote Control	-	N/A			

## Output Specifications



Item		Operating Condition	Min.	Typ.	Max.	Unit
Output Voltage Accuracy		Input full voltage range, any load	-	±2.0	±3.0	%
Line Regulation		Rated load	-	±0.5	±1.2	
Load Regulation		Nominal input voltage, 20%~100% load	-	±1.0	±2.0	
Minimum Load		Single Output	10	-	-	
Turn-on delay		Input 100VDC (Full load)	-	5000	-	mS
		Input 1000VDC (Full load)	-	1000	-	
Power off Hold up time		Input 500VDC (Full load)	-	10	-	
Dynamic Response	Overshoot	25%-50%-25%	-6.0	-	+6.0	%
	Recovery	50%-75%-50%	-	500	-	mS
Output Overshoot		Input full voltage range	≤10%Vo			%
Short circuit protection		Input 100-700VDC	Continuous, self-recovery			Hiccup
Drift coefficient		-	-	±0.05%	-	%/°C
Over current protection		Input 200-1000VDC	≥110% Io, self-recovery			Hiccup
Ripple & Noise		-	-	-	200	mV

## General Specifications

Item	Operating Condition	Min.	Typ.	Max.	Unit
Switching Frequency	-	-	65	70	KHz
Operating Temperature	Please refer to the Temperature Derating Graph	-30	-	+70	°C
Storage Temperature	-	-40	-	+85	
Soldering Temperature	Wave-soldering	260±5℃, time: 5-10S			
	Manual-soldering	380±10℃, time: 4-7S			
Relative Humidity	No condensing	-	-	90	%RH
Isolation Voltage	Input-Output, Test 1min, leakage current ≤5mA	4000	-	-	VAC
Insulation Resistance	Input-Output @DC500V	100	-	-	MΩ
Safety Standard	-	IEC/EN62368			

Vibration	-	10-55Hz,10G,30 Min, along X,Y,Z
Safety Class	-	CLASS II
Flame class of case	-	UL94-V0
MTBF	MIL-HDBK-217F@25℃	>300KH
Cooling Method	-	Nature air
Unit Weight	Part No.	Weight (Typ.)
	BK15-500SXXH2N6	115g
	BK15-500SXXH2N6-T	160g
	BK15-500SXXH2N6-TS	195g

## H2N6 Mechanical Dimensions

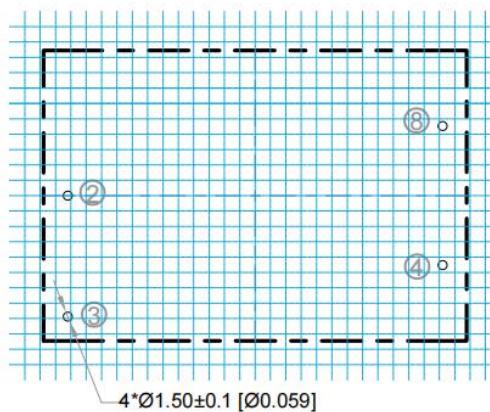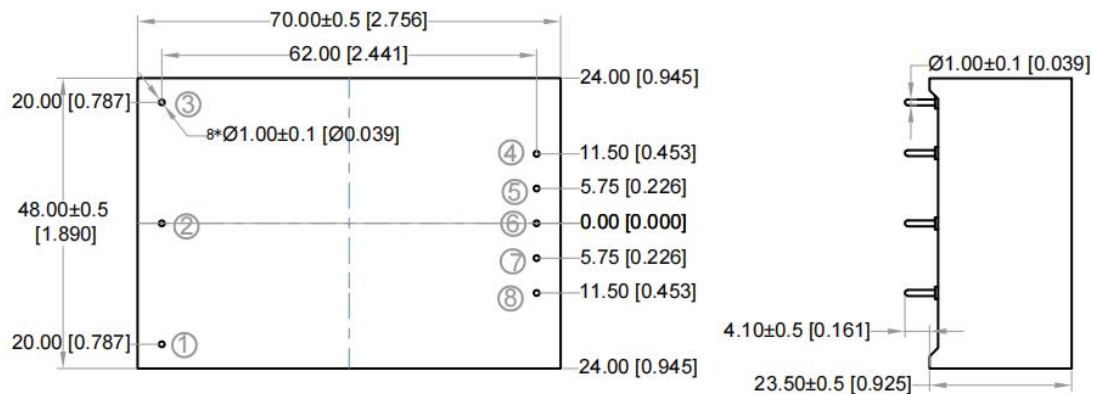


PCB layout vertical view  
Grid 2.54x2.54[0.10x0.10]

Unit: mm[inch]  
Pin diameter tolerance:  $\pm 0.10[\pm 0.004]$   
General tolerance:  $\pm 0.50[\pm 0.020]$

Pin No.	Function
1	No Pin
2	-Vin
3	+Vin
4	+Vout
5	No Pin
6	No Pin
7	No Pin
8	-Vout(GND)

Package Code	Dimensions L x W x H	
H2	70.00 X 48.00 X 23.50 mm	2.756X1.890X0.925 inch

## H2N6-T Mechanical Dimensions

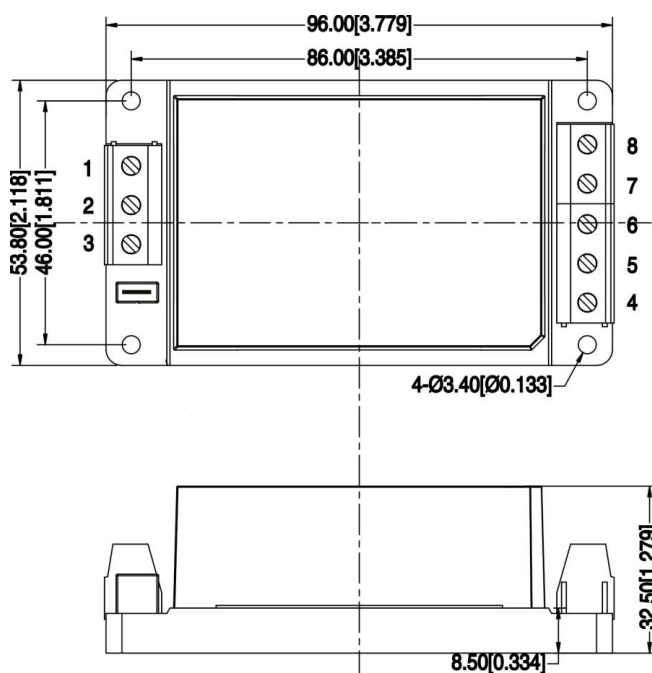


Terminal No.	Function
1	No Connection
2	-Vin
3	+Vin
4	+Vout
5	No Connection
6	No Connection
7	No Connection
8	-Vout(GND)

Note:  
 Unit: mm[inch]  
 Lead wires gauge: 24-12 AWG  
 Screwing torque: 0.4 N.m Max  
 General tolerance: ±1.00[±0.039]

Package Code	Dimensions L x W x H	
H2N6-T	96.00X53.80X32.50 mm	3.779X2.118X1.279 inch

## H2N6-TS Mechanical Dimensions

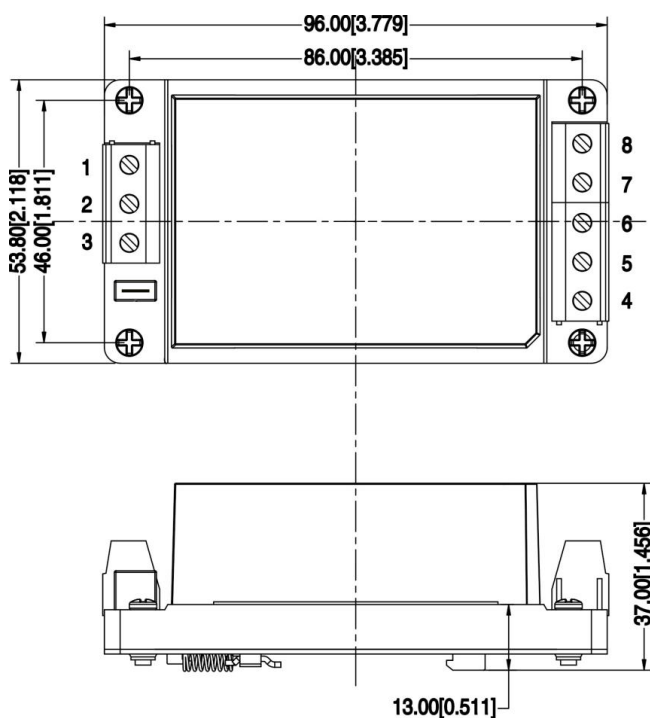

Terminal No.	Function
1	No Connection
2	-Vin
3	+Vin
4	+Vout
5	No Connection
6	No Connection
7	No Connection
8	-Vout(GND)


Note:  
 Unit: mm[inch]  
 Lead wires gauge: 24-12 AWG  
 Screwing torque: 0.4 N.m Max  
 General tolerance: ±1.00[±0.039]

Package Code	Dimensions L x W x H	
H2N6-TS	96.00X53.80X37.00 mm	3.779X2.118X1.456 inch




## Ripple & Noise Test Instruction (Twisted Pair Method, 20MHz Bandwidth)

1) The Ripple & noise test needs AWG12# twisted pair cables, an oscilloscope which bandwidth should be set to 20MHz, 0.1uF polypropylene capacitor and 10uF high-frequency low-resistance electrolytic capacitor are connected in parallel with the probes (100M bandwidth). The oscilloscope should be set at the Sample Mode.

2) The test diagram is shown on the right. The converter output connects to the electronic load by the jig with cables which size should be defined according to the output current value. The twisted pair (length 30cm±2 cm) should be connected in parallel with the load, the location is as close as possible to the output pins or terminals. The test can be start after input power on.

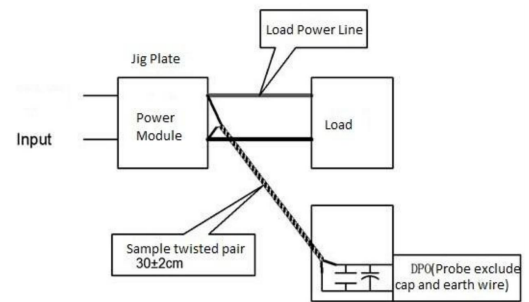


## Product Characteristics Graphs

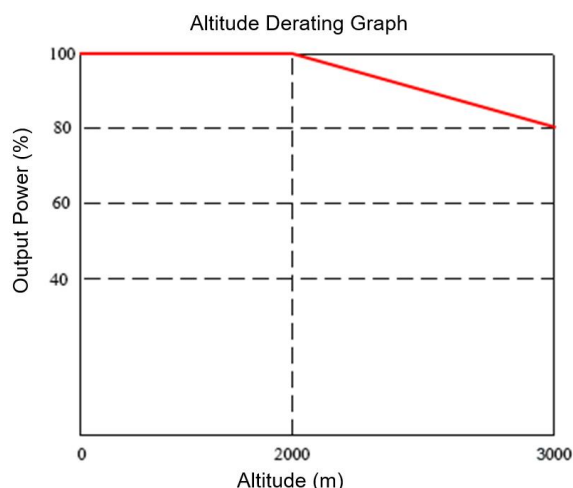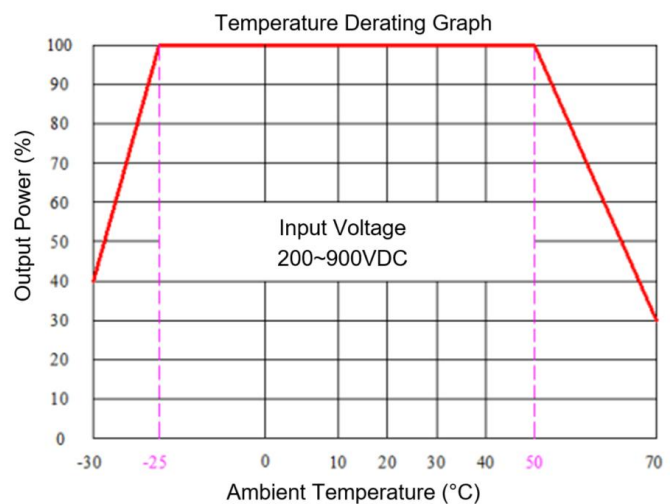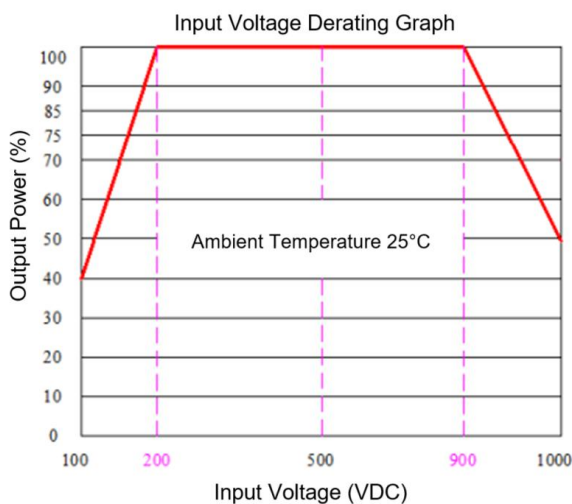

Note 1: The output power should be derated based on the input voltage derating graph at 100~200/900-1000VDC.

Note 2: This product should operate at a natural air condition, please contact us if it need be used at a closed space.


## Typical Application Circuit

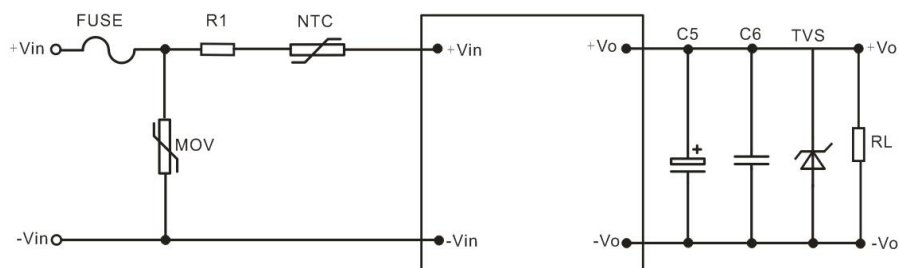

Output Voltage	C5	C6	TVS
12V	330uF/35V	0.2uF/50V/1206	SMBJ18A
15V	330uF/35V	0.2uF/50V/1206	SMBJ18A
24V	220uF/50V	0.1uF/50V/1206	SMBJ28A

Note: A high-frequency low-resistance electrolytic capacitor is recommended for C5 which capacitance and current should refer to the manufacturer's technical specification, its withstand voltage should be derated at least 80% of rated. A ceramic SMD capacitor is recommended for C6 which can suppress the high-frequency noise. TVS is recommended to protect the output circuit while the power supply operating at abnormal condition.

## Recommended EMC Circuit

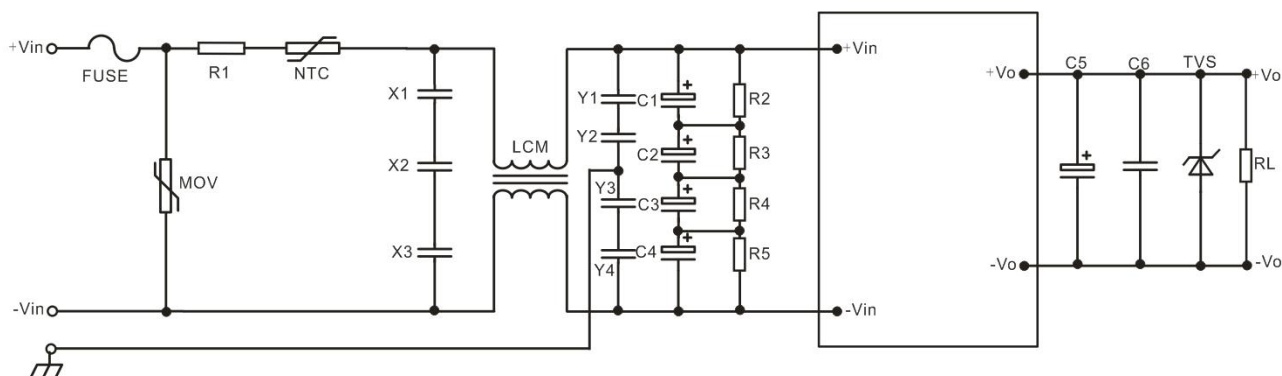

Component	Function Description	Recommended Value	Remarks
FUSE	Shut off the input while the converter operating at abnormal condition	TBD according to the actual input current	Necessary
R1 (Current-Limiting Resistor)	Suppress the start-up transient surge current	300Ω/10W (Cement type resistor)	
NTC	Suppress the surge current	5D-15	
MOV (Metal Oxide Varistor)	Absorb the surges	20D152K/6500A	Optional according to the actual application
X1/X2/X3 (X1 capacitor)	Suppress the differential mode interference	X1/105K/440VAC	
LCM (Common mode Choke)	Suppress the Common mode interference	8mH/0.8A	
Y1/Y2/Y3/Y4 (Y capacitor)		Y1/222M/400VAC	
C1/C2/C3/C4 (E-cap)	Low frequency Filtering	200uF/400V	
R2/R3/R4/R5(SMD resistor)	Voltages balance	1MΩ/2W	



**Application Notice**

1. The products should be used according to the specifications in this datasheet, otherwise it could be permanently damaged.
2. A fuse should be connected at input.
3. The product performance in this datasheet cannot be guaranteed if it works at a lower load than the minimum load defined.
4. The product performance in this datasheet cannot be guaranteed if it works at over-load condition.
5. Unless otherwise specified, all values or indicators in this datasheet are tested at  $T_a=25^{\circ}\text{C}$ , humidity<75%RH, nominal input voltage and rated load (pure resistance load).
6. All values or indicators in this datasheet had been tested based on Aipupower test specifications.
7. The specifications are specially for the parts listed in this datasheet, any other non-standard model performances could be out of the specifications. Please contact our technician for specific requirements.
8. Aipupower can provide customization service.

**Guangzhou Aipu Electron Technology Co., Ltd**

Address: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, China.

Tel: 86-20-84206763 Fax: 86-20-84206762 HOTLINE: 400-889-8821

E-mail: sales@aipu-elec.com Website: [https:// www.aipupower.com](https://www.aipupower.com)