

## Typical Features

- ◆ Wide input voltage range 85-305VAC/100-430VDC
- ◆ Standby power consumption ≤0.25W@220VAC
- ◆ Efficiency up to 76%(Typ.)
- ◆ Operating temperature from -40°C to +85°C
- ◆ Switching frequency 65KHz
- ◆ Short circuit & over current protections
- ◆ Isolation voltage 4000VAC
- ◆ Altitude during operation 4000m Max.
- ◆ Compliant with IEC/EN62368/UL62368
- ◆ PCB DIP mounting



## Application Field

**FA3-220SXXG2D4(-T)(-TS) Series** ----- Compact size & high efficiency modular power supplies with global adapted input voltage range (both AC & DC available), low ripple, low temperature rise, low standby power consumption, high efficiency, high reliability, safety isolated and good EMC performance. This series of products can be widely used in the fields of Electric power, Industrial, Instrument and Smart home devices, etc. Additional circuit diagram for EMC is recommended for the application with high EMC requirement.

## Typical Product List

Certificate	Part No.	Input Voltage Range		Output Specifications			Max Capacitive Load @220VAC	Ripple & Noise 20MHz (Max)	Efficiency @full load 220VAC (Typ.)
		Nominal	Range	Power	Voltage	Current			
		(VAC)	(VAC)	P (W)	Vo(VDC)	Io (mA)			
-	FA3-220S3V3G2D4	220	85-305	3	3.3	900	2000	100	68
-	FA3-220S05G2D4			3	5	600	2000	100	70
-	FA3-220S12G2D4			3	12	250	1000	120	75
-	FA3-220S15G2D4			3	15	200	800	120	75
-	FA3-220S24G2D4			3	24	125	400	150	76

Note 1: Please contact Aipu sales for other output voltages requirements of this series but not listed in this table.

Note 2: The typical value of efficiency is based on the product tested after half an hour burn-in at full load.

Note 3: The full load efficiency should be in ±2% of the typical value in this table. The efficiency is calculated by the way that the full output power is divided by the input power.

Note 4: The suffix -T indicates the chassis package, -TS indicates the package of DIN Rail.

## Input Specifications

Item	Test Condition	Min	Typ.	Max	Unit
Input voltage range	AC input	85	220	305	VAC
	DC input	100	310	430	VDC

Input frequency range	-	47	50	63	Hz		
Input current	Input 115VAC	-	-	0.12	A		
	Input 220VAC	-	-	0.08			
Surge current	Input 115VAC	-	-	15			
	Input 220VAC	-	-	20			
Standby power consumption	Input 115VAC	-	-	0.25	W		
	Input 220VAC	-	-				
Leakage current	-	0.5mA TYP/230VAC/50Hz					
Recommended external fuse	-	2A/300VAC Time-delay fuse					
Hot-plug	-	Unavailable					
ON/OFF Control	-	Unavailable					

## Output Specifications

Item	Test Condition		Min	Typ.	Max	Unit
Output voltage accuracy	Full input voltage range, any load	Vo=3.3V	-	±3.0	±5.0	%
		Others	-	±2.0	±3.0	%
Line regulation	Nominal load		-	-	±0.5	%
Load regulation	Nominal input voltage, 20%~100% load		-	-	±1.0	%
Minimum load	Single Output		0	-	-	%
Temperature drift coefficient	-		-	-	±0.03	%/°C
Turn-on delay time	Input 115VAC (full load)		-	-	50	mS
	Input 220VAC (full load)		-	-		
Power-off hold up time	Input 115VAC (full load)		-	50	-	mS
	Input 220VAC (full load)		-	80	-	
Dynamic response	Overshoot range Recovery time	25%~50%~25% 50%~75%~50%		-5.0	-	+5.0
				-	-	5.0
Output overshoot	Full input voltage range		≤10			%Vo
Short circuit protection			Continuous, self-recovery			Hiccup
Over current protection	Input 220VAC		130%Io	-	200%Io	Hiccup
Ripple & Noise	5%~100% load, 20MHz bandwidth		-	60	150	mV

Note: The Ripple &amp; Noise is tested by the Parallel-line method (refer to the following test instructions).

## General Specifications




Item	Test Condition		Min	Typ.	Max	Unit	
Switching frequency	-		-	65	-	KHz	
Operating temperature	Refer to the Temperature Derating Graph		-40	-	+85	°C	
Storage temperature	-		-40	-	+105		
Soldering temperature	Wave soldering		260±4 °C, time 5-10S				
	Manual soldering		360±8 °C, time 4-7S				
Relative humidity	-		10	-	90	%RH	

Isolation voltage	I/P-O/P	Test 1min, leakage current <5mA	4000	-	-	VAC
Insulation resistance	I/P-O/P	@ DC500V	100	-	-	MΩ
MTBF	MIL-HDBK-217F@25°C			300	-	-
Safety standard	-			EN62368, IEC62368		
Vibration	-			10-55Hz, 10G, 30Min, along X, Y, Z		
Safety standard	-			CLASS II		
Flame class of case	-			UL94 V-0		
Weights & Dimensions	Part No.	Weight (Typ.)	Dimensions L x W x H			
	FA3-220SXXG2D4	20g	25.40X25.40X17.60 mm		1.000X1.000X0.693 inch	
	FA3-220SXXG2D4-T	45g	76.00X31.50X26.70 mm		2.992X1.240X1.051 inch	
	FA3-220SXXG2D4-TS	65g	76.00X31.50X31.50 mm		2.992X1.240X1.240 inch	

## EMC Performance

Items		Test Standard	Performance/Class		
EMC	EMI	CE	CISPR32/EN55032	CLASS B (with the Recommended Circuit 1)	
		RE	CISPR32/EN55032	CLASS B (with the Recommended Circuit 1)	
	EMS	RS	IEC/EN61000-4-3	10V/m	Perf. Criteria B (with the Recommended Circuit 1)
		CS	IEC/EN61000-4-6	3Vr.m.s	Perf. Criteria B (with the Recommended Circuit 1)
		ESD	IEC/EN61000-4-2	Contact ±6KV / Air ±8KV	Perf. Criteria B
		Surge	IEC/EN61000-4-5	Line to line ±2KV / line to ground ±4KV	Perf. Criteria B (with the Recommended Circuit 1)
		EFT	IEC/EN61000-4-4	±2KV	Perf. Criteria B
		Voltage dips and variations	IEC/EN61000-4-11	0%~70%	Perf. Criteria B

## Product Characteristic Graphs

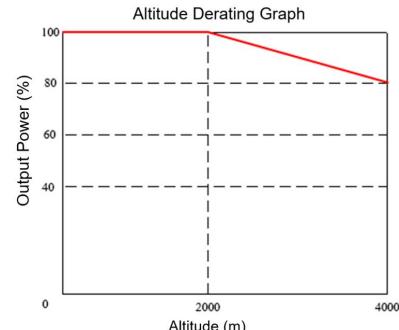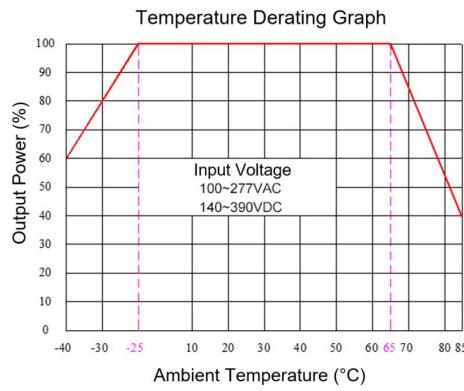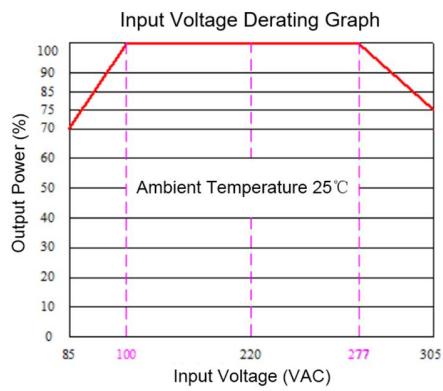

Note 1: The output power should be derated based on the input voltage derating graph at 85~100VAC/120~140VDC & 277~305VAC/390~430VDC.

Note 2: This product should operate under the condition of natural air, please contact us if it could be used at a closed space.

## Recommended Typical EMC Circuit


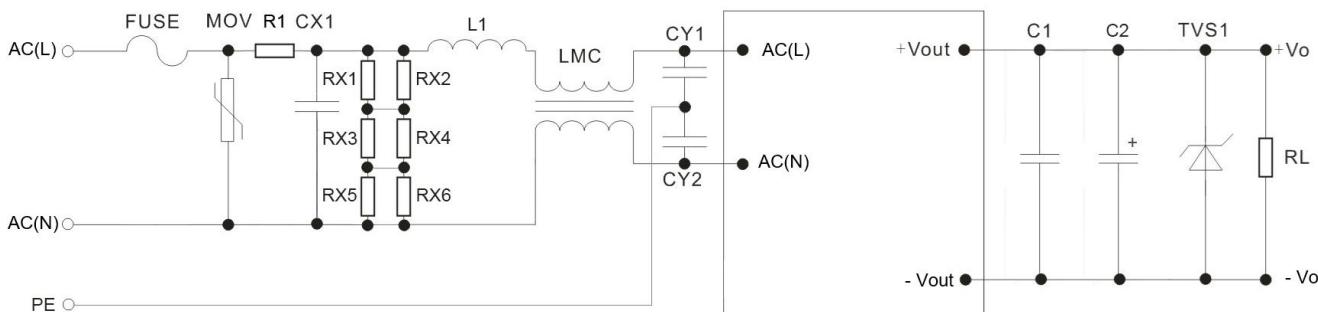


Figure - Circuit 1

Part No.	FUSE (*)	MOV	R1(*)	CX1	RX1,RX2 RX3,RX4 RX5,RX6	L1	LMC	CY1 CY2	C1	C2	TVS1
FA5-220S3V3G2D4	2A/ 300V (Time delay fuse)	14D561 K/ 4500A	33Ω/3W (Wire- wound resistor)	X2/33 4K/ 310 VAC	1206/ 1.5MΩ	1.2mH /0.3A	20mH	Y1/1 02M /400 VAC	100uF/ 16V 68uF/16V 68uF/25V 47uF/35V	SMBJ7.0A SMBJ20A SMBJ30A	
FA5-220S05G2D4											
FA5-220S12G2D4											
FA5-220S15G2D4											
FA5-220S24G2D4											


Note: Both the \* marked FUSE & R1 are required for the application.

## Ripple &amp; Noise Test Instruction (Parallel-line Method, 20MHZ bandwidth)

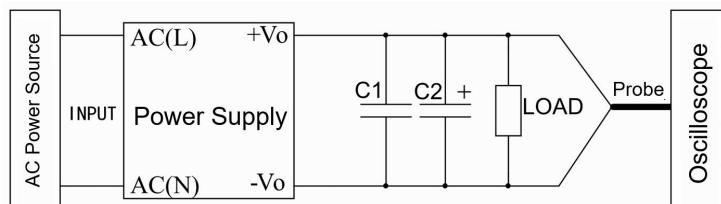

1. The Ripple & Noise test needs the cables in parallel, an oscilloscope that should be set at the Sample Mode, bandwidth 20MHz. 100M bandwidth probe with cap and ground removed. One polypropylene capacitor C1(0.1uF) and one high frequency low impedance electrolytic capacitor C2(10uF) are connected in parallel with the probe.
2. Refer to the test diagram, the converter output connects to the electronic load by the jig with cables which size should be defined according to the output current value. The test can start at the converter output terminals after the input power on.


## Mechanical Dimensions

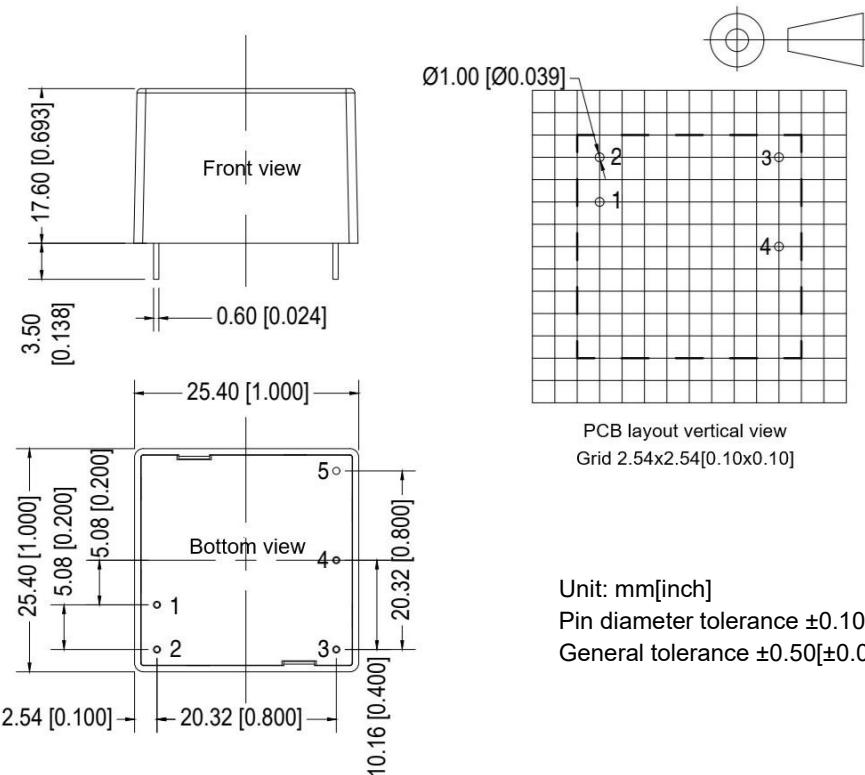

## Pin-out Function Description


Pin No.	1	2	3	4	5
Function	AC(L)	AC(N)	+Vo	-Vo	NP

## -T Mechanical Dimensions

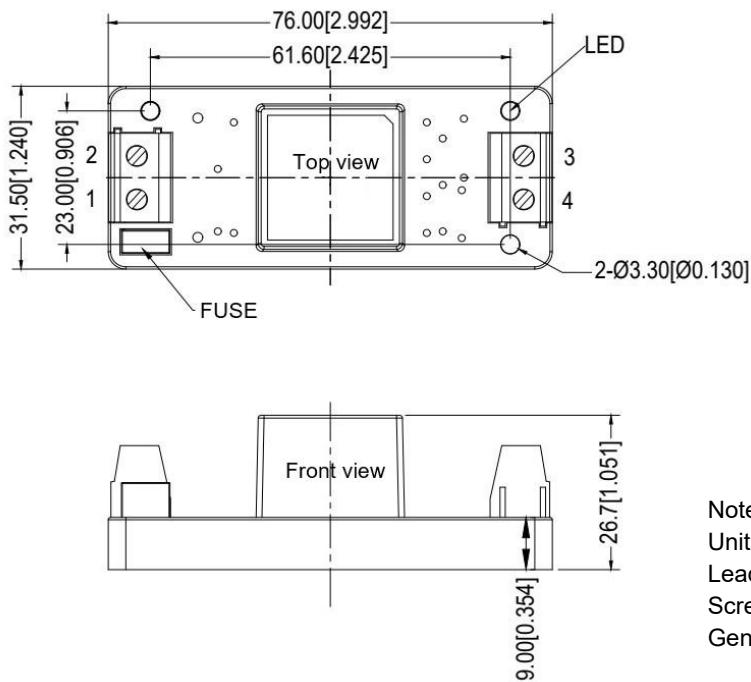

## Terminal Function Description

Terminal No.	1	2	3	4
Function	AC(L)	AC(N)	+Vo	-Vo

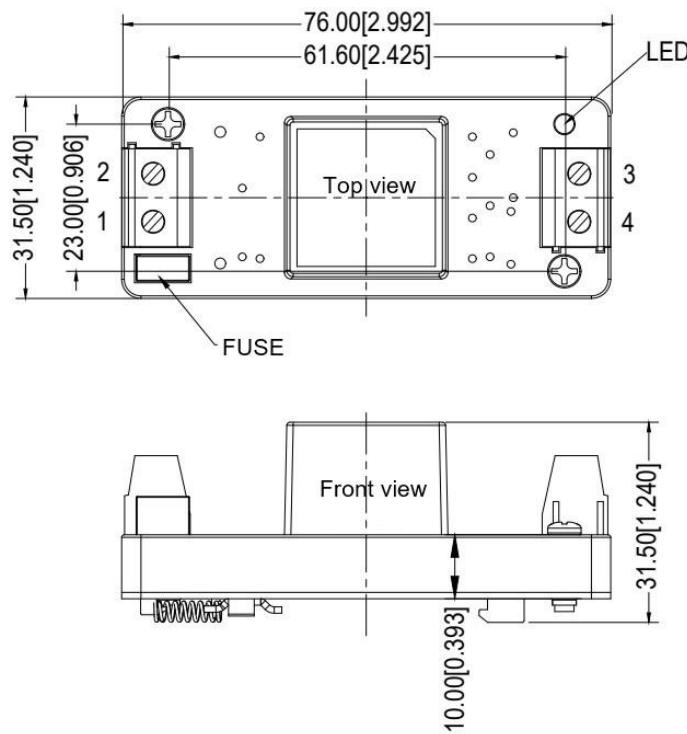**-TS Mechanical Dimensions**

Note:  
 Unit: mm[inch]  
 Lead wires gauge: 24 -12AWG  
 Screwing torque: 0.4N.m Max  
 General tolerance  $\pm 1.00[\pm 0.039]$

**Terminal Function Description**

Terminal No.	1	2	3	4
Function	AC(L)	AC(N)	+Vo	-Vo

**Application Notice**

1. The product should be used according to the specifications, otherwise it could be permanently damaged.
2. The product performance cannot be guaranteed if it works at a lower load than the minimum load defined.
3. The product performance cannot be guaranteed if it works under over-load condition.
4. Unless otherwise specified, all values or indicators on this datasheet are tested at  $T_a=25^\circ\text{C}$ , humidity<75%RH, nominal input voltage and rated load (pure resistance load).
5. All values or indicators on this datasheet have been tested based on Aipupower test specifications.
6. The specifications are specially for the parts listed on this datasheet, any other non-standard model performances could be out of the specifications. Please contact our technician for specific requirements.
7. Aipupower can provide customization service.

**Guangzhou Aipu Electron Technology Co., Ltd**

Address: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, China.

Tel: 86-20-84206763 Fax: 86-20-84206762 HOTLINE: 400-889-8821

E-mail: [sales@aipu-elec.com](mailto:sales@aipu-elec.com) Website: <https://www.aipupower.com>