

## Typical Feature

- ◆ Fixed input voltage, isolated & unregulated, output power 1W
- ◆ Efficiency up to 88%
- ◆ Mini SMD package, international standard pin-out
- ◆ Isolation Voltage 3000VDC
- ◆ Operating Temperature from -40°C to +105°C
- ◆ Continuous short circuit protection
- ◆ No load input current as low as 3mA
- ◆ Plastic case, flame class UL94 V-0



**Test conditions:** Unless otherwise specified, all parameter values had been tested at rated input voltage, pure resistive rated load, and at room temperature 25 °C.

## Application Filed

*This series of converters can be widely used in the fields of instrument, communication, pure digital circuit, general low frequency analog circuit, relay drive circuit, data exchange circuit, etc.*

## Typical Product List

Certificate	Part No.	Input Voltage Range (VDC)		Output Voltage/Current		Input Current (mA)Typ. @Rated Voltage		Max. Capacitive Load	Ripple & Noise 20MHz (mVp-p)	Efficiency (%) @full load/rated input	
		Rated	Range	Voltage (VDC)	Io (mA) Max / Min	Full load	No Load			Max/Typ	Min
-	NN1-3V3S3V3A3NT	3.3	2.97 - 3.63	3.3	303/30	370	5	2400	100/50	74	76
-	NN1-3V3S05A3NT			5	200/20	370	5	2400	100/50	80	82
-	NN1-3V3S09A3NT			9	111/11	357	5	1000	100/50	83	85
-	NN1-3V3S12A3NT			12	83/8	348	10	560	150/100	85	87
-	NN1-3V3S15A3NT			15	67/7	348	10	560	150/100	85	87
-	NN1-3V3S24A3NT			24	42/4	357	20	220	150/100	83	85
-	NN1-05S3V3A3NT	5	4.5 - 5.5	3.3	303/30	244	5	2400	100/50	78	80
CB, UL, RoHS	NN1-05S05A3NT			5	200/20	233	6	2400	100/50	83	85
RoHS	NN1-05S09A3NT			9	111/11	233	6	1000	100/50	84	86
RoHS	NN1-05S12A3NT			12	83/8	225	15	560	150/100	85	87
RoHS	NN1-05S15A3NT			15	67/7	225	15	560	150/100	85	87
RoHS	NN1-05S24A3NT			24	42/4	244	30	220	150/100	86	88
-	NN1-12S3V3A3NT	12	10.8 - 13.2	3.3	303/30	96	6	2400	100/50	80	82
CE, CB, UL, RoHS	NN1-12S05A3NT			5	200/20	96	6	2400	100/50	84	86
-	NN1-12S09A3NT			9	111/11	89	6	1000	100/50	84	86
CE	NN1-12S12A3NT			12	83/8	89	6	560	100/50	84	86
-	NN1-12S15A3NT			15	67/6	93	7	560	100/50	84	86
ETL	NN1-12S24A3NT			24	42/4	93	8	220	100/50	84	86

-	NN1-15S05A3NT	15	13.5 - 16.5	5	200/20	78	5	2400	100/50	83	85
-	NN1-15S12A3NT			12	83/9	76	10	1000	100/50	84	86
-	NN1-15S15A3NT			15	67/6	78	5	560	100/50	84	86
-	NN1-15S24A3NT			24	42/5	75	10	470	150/100	83	85
-	NN1-24S3V3A3NT	24	21.6 - 26.4	3.3	303/30	47	3	2400	100/50	80	82
-	NN1-24S05A3NT			5	200/20	47	3	2400	100/50	84	86
-	NN1-24S09A3NT			9	111/11	48	5	1000	100/50	84	86
-	NN1-24S12A3NT			12	83/8	48	5	560	100/50	84	86
-	NN1-24S15A3NT			15	67/6	48	6	560	100/50	84	86
-	NN1-24S24A3NT			24	42/4	48	8	220	100/50	84	86

Note - The ripple and noise are tested by the twisted pair method.

### Input Specifications

Item	Operating Condition	Min.	Typ.	Max.	Unit	
Input inrush voltage (1Second Max.)	3.3Vdc Input	-0.7	--	7	Vdc	
	5Vdc Input	-0.7	--	9		
	9Vdc Input	-0.7	--	12		
	12Vdc Input	-0.7	--	18		
	15Vdc Input	-0.7	--	21		
	24Vdc Input	-0.7	--	30		
Input Filter Type	Capacitor Filter					
Hot Plug	Unavailable					

### Output Specifications

Item	Operating Condition	Min.	Typ.	Max.	Unit
Output Power		0.1	--	1	W
Output Voltage Accuracy	Please refer to the output voltage deviation curve (Figure 1)				
Load Regulation	10%-100% load	3.3Vdc output	-	15	20
		Other voltage output	-	10	15
Line Regulation	Input voltage change $\pm 1\%$	3.3Vdc output	-	-	1.5
		Other voltage output	-	-	1.2
Temperature Drift Coefficient	Full load	-	-	$\pm 0.03$	$^{\circ}\text{C}$
Short Circuit Protection	Continuous, Self-recovery				

### General Specifications




Item	Operating Condition	Min.	Typ.	Max.	Unit
Switching Frequency	Rated input voltage, full load	--	260	--	KHz
Operating Temperature	Refer to the temperature derating curve (Figure 2)	-40	--	+105	$^{\circ}\text{C}$
Storage Temperature		-55	--	+125	

Case Temperature Rise	Operating at $T_a = 25^\circ\text{C}$		--	30°	--	
Pin Soldering Temperature	1.5mm from the case, 10S		--	--	300	
Reflow Temperature	Peak temperature $T_c \leq 250^\circ\text{C}$ , the maximum time above $217^\circ\text{C}$ is 60S					
Relative Humidity	No condensing		5	--	95	%RH
Isolation Voltage	Input-Output, test 1min, leakage current < 1mA	3000	--	--	VDC	
Insulation Resistance	Input-Output, @ 500Vdc	1000	--	--	$\text{M } \Omega$	
Isolation Capacitor	Input/Output, 100KHz/0.1V	--	20	--	pF	
MTBF	MIL-HDBK-217F@ $25^\circ\text{C}$	3500	--	--	K hours	
Case Material	Plastic in Black, flame class UL94 V-0					
Product Weight	1.4 g (Typ.)					
Cooling Method	Natural air					
Unit dimensions	L x W x H	12.70X11.00X7.13 mm	0.500 × 0.433 × 0.281 inch			



### EMC Characteristic

EMI	CE	CISPR32/EN55032 CLASS B (with EMC Recommended Circuit)
	RE	CISPR32/EN55032 CLASS B (with EMC Recommended Circuit)
EMS	ESD	IEC/EN61000-4-2 Air $\pm 8\text{kV}$ , Contact $\pm 6\text{kV}$ perf. Criteria B

### Mechanical Dimensions

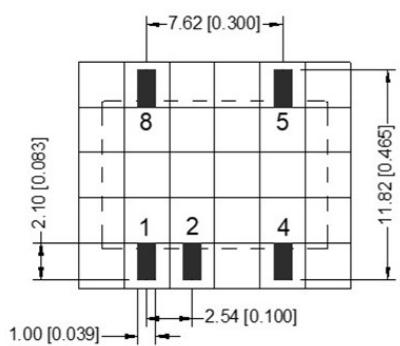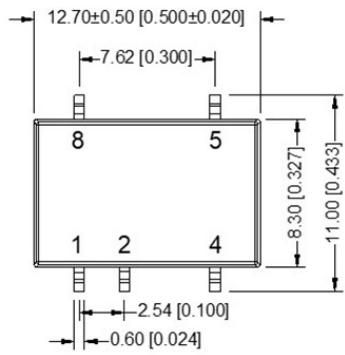

PCB layout vertical view  
(Grid 2.54x2.54mm)

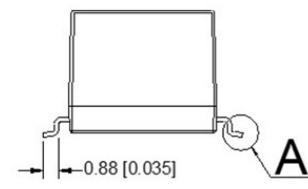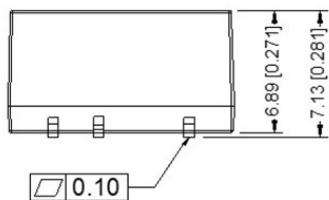

Note:

Unit: mm[inch]

Pin section tolerance:  $\pm 0.10 [0.004]$

General tolerance:  $\pm 0.25 [0.010]$

Pin No.	Function
1	GND
2	+Vin
4	-Vo
5	+Vo
8	NC


NC should not connect to any circuit

Note - Please take the pin definition on the product label marking as the right one if it is different than the one defined in this data sheet.

## Ripple & Noise Test Instructions (Twisted Pair Method, 20MHz Bandwidth)

### Test Method:

1. The Ripple & noise test need 12# twisted pair cables, an oscilloscope which bandwidth should be set to 20MHz, 0.1uF polypropylene capacitor and 10uF high-frequency low-resistance electrolytic capacitor are connected in parallel with the probes (100M bandwidth). The oscilloscope should be set at the Sample Mode.
2. The test diagram is shown on the right. The converter output connects to the electronic load by the jig with cables which size should be defined according to the output current value. The twisted pair (length 30cm±2 cm) should be connected in parallel with the load, the location is as close as possible to the output pins or terminals. The test can be started after input power on.

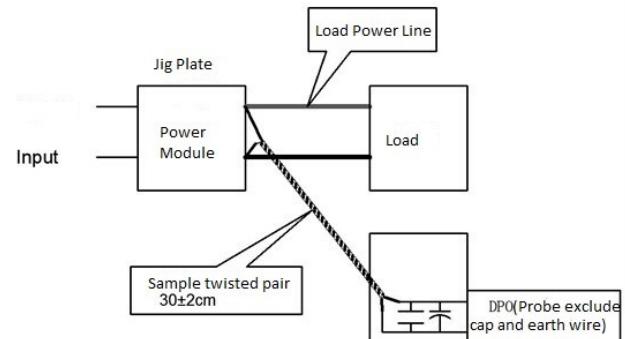

## Product Performance Curves

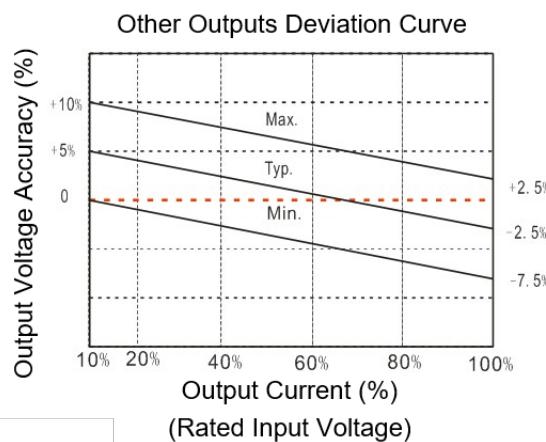
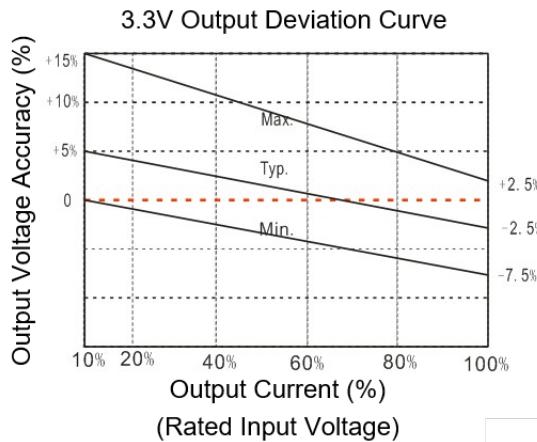


Figure 1  
Temperature Derating Curve

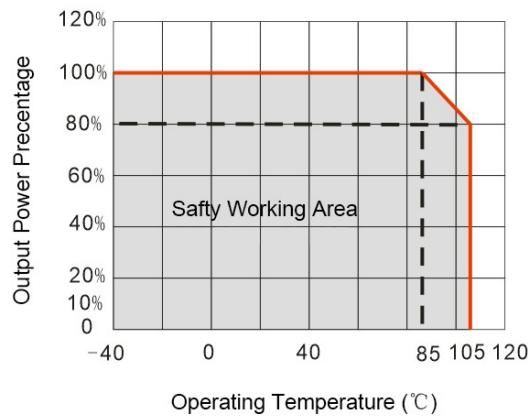


Figure 2


## Recommended Circuits for Application

### ① Output load requirements

The maximum capacitive load of the product was tested at the Rated full load. The converter may not start or be damaged if the output capacitor exceeds this value.

### ② Recommended circuits for application


To effectively decrease the input and output ripple and noise, a capacitor filter should be connected at the input and output, the application circuit is shown in the figure below. The suitable filter capacitors should be chosen as the recommended capacitive load values in Table 1. The converter could not start if the capacitance is too big.

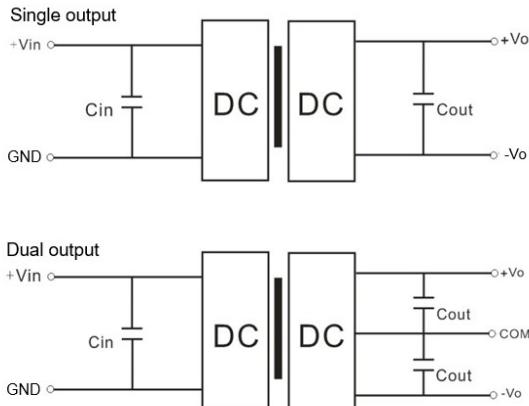

Recommended Capacitive Load Value Table (Table 1)

Vin (Vdc)	Cin	SingleVout (Vdc)	Cout (μF)	Dual Vout (Vdc)	Cout (μF)
5	10 μF/16V	3. 3	10 μF/16V	±3. 3	4. 7 μF/16V
12	2. 2 μF/25V	5	10 μF/16V	±5	4. 7 μF/16V
15	2. 2 μF/25V	9	2. 2 μF/25V	±9	2. 2 μF/25V
24	1 μF/50V	12	2. 2 μF/25V	±12	1 μF/25V
--	--	15	1 μF/25V	±15	1 μF/16V
--	--	24	1 μF/50V	±24	0. 47 μF/50V


### ③ Recommended EMC Circuit

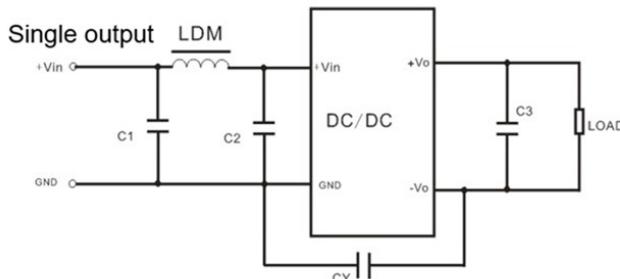






Input voltage		5VDC	12/15/24VDC
EMI	C1/C2	4. 7μF/16V	4. 7μF/50V
	CY	270pF/4KV	270pF/4KV
	C3	Refer to Cout in Table 1	
	LDM	6. 8 μH	6. 8 μH

### ④ Output voltage regulation and over voltage protection

The simple solution to achieve the output voltage regulated, over voltage and over current protections is to connect a linear regulator with overheat protection at input or output, and a capacitor filter connected in parallel as below circuit. Filter capacitive value recommended see table 1, Linear regulator should be chosen according to the actual voltage & current for operating. Or Aipu NW series products are recommended instead.

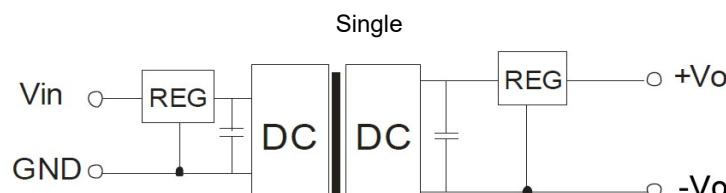

## Packing information

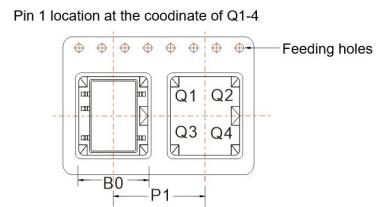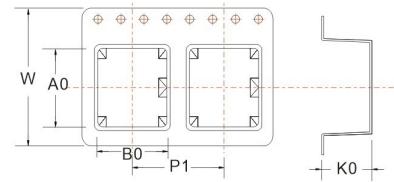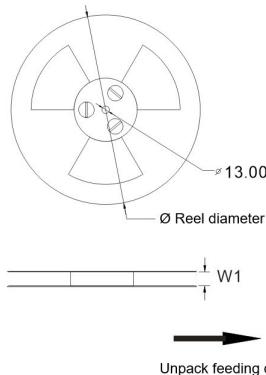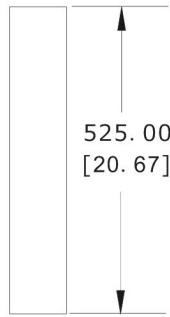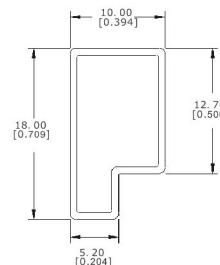

Note:  
Unit: mm[inch]  
General tolerance:  $\pm 1.50[\pm 0.059]$   
Packing QTY: 39pcs/Tube  
Packing QTY: 3120pcs/Carton  
Tube size: 525x18x10mm  
Carton size: 542x110x155mm

Part No.	Packaging Type	Pin	SPQ	Reel Diameter (mm)	Reel Width (mm)	W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W1 (mm)	Pin1 Location
NNX...SXXA(3)NT	SMD	5	500	330.0	24.5	13.65	12.40	7.7	16.0	24.0	Q1	

Tube packing

Reel packing (500pcs per Reel)

## Application Notice

1. This product cannot be used in parallel, and it does not support hot-plugging.
2. The product performance in this manual cannot be guaranteed if it works at a lower load than the minimum load condition.
3. All values or indicators in this manual had been tested based on Aipupower test specifications.

## Guangzhou Aipu Electron Technology Co., Ltd

Address: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, China.

Tel: 86-20-84206763 Fax: 86-20-84206762 HOTLINE: 400-889-8821

E-mail: sales@aipu-elec.com Website: <https://www.aipupower.com>