

Typical Features

- ◆ Wide input voltage range 90-265VAC/127-375VDC
- ◆ No load power consumption $\leq 0.3W$ @220VAC
- ◆ Efficiency up to 79% (Typ.)
- ◆ Operating temperature from -40°C to $+75^{\circ}\text{C}$
- ◆ Switching frequency 65KHz
- ◆ Short circuit, over current & over temp. protections
- ◆ Isolation voltage 4000VAC
- ◆ Altitude during operation 2000m Max
- ◆ Compliant with IEC/EN62368/UL62368
- ◆ With CE certificate
- ◆ Enclosed plastic case, flame class UL94-V0
- ◆ PCB DIP Mounting



CE

EN62368-1

Application Field

FA5-220SXXY2D4 Series ----- Compact size, high efficiency modular power supplies with global adapted input voltage range (both AC & DC available), low ripple, low temperature rise, low standby power consumption, high efficiency, high reliability, safety isolated and good EMC performance. This series of products can be widely used in the fields of Electric power, Industrial, Instrument, Smart home devices, etc. Additional circuit diagram for EMC is recommended for the application with high EMC requirement.

Typical Product List

Certificate	Part No.	Input Voltage Range		Output Specification			Max. Capacitive Load @220VAC	Ripple & Noise 20MHz (Max)	Efficiency @full load, 220VAC (Typ.)
		Nominal	Range	Power	Voltage	Current			
		(VAC)	(VAC)	P (W)	Vo(VDC)	Io (mA)			
CE	FA5-220S3V3Y2D4	220	90-265	4.1	3.3	1250	2000	80	69
	FA5-220S05Y2D4			5	5	1000	1000	80	71
	FA5-220S09Y2D4			9	556	470	120	74	
	FA5-220S12Y2D4			12	416	100	120	78	
	FA5-220S15Y2D4			15	333	100	120	78	
	FA5-220S24Y2D4			24	208	100	120	79	

Note 1: The typical value of efficiency is based on the product tested after half an hour burn-in at full load.

Note 2: The full load efficiency should be in $\pm 2\%$ of the typical value in this table. The efficiency is calculated by the way that the full output power is divided by the input power.

Note 3: The suffix -T indicates the chassis package, -TS indicates the package of DIN Rail which width is 35mm.

Note 4: Please contact Aipu sales for other output voltages requirements of this series but not listed in this table.

Input Specifications

Item	Test Condition	Min.	Typ.	Max.	Unit		
Input voltage range	AC Input	90	220	265	VAC		
	DC Input	127	310	375	VDC		
Input frequency	-	47	50	63	Hz		
Input current	Input 115VAC	-	-	0.10	A		
	Input 220VAC	-	-	0.06			
Surge current	Input 115VAC	-	-	10	A		
	Input 220VAC	-	-	20			
Standby power consumption	Input 115VAC	-	-	0.3	W		
	Input 220VAC	-	-				
Leakage current	-	0.5mA TYP/230VAC/50Hz					
External fuse Recommended	-	2A/300VAC Time-delay fuse					
Hot-plug	-	Unavailable					
ON/OFF Control	-	Unavailable					

Output Specifications

Item	Test Condition	Min.	Typ.	Max.	Unit
Output voltage accuracy	Full input voltage range, any load	-	±2.0	±5.0	%
Line regulation	Rated Load	-	±1.0	±3.0	%
Load regulation	Nominal input voltage, 20%~100% load	-	±1.0	±3.0	%
Minimum load	Single Output	10	-	-	%
Temperature drift coefficient	-	-	-	±0.03	%/°C
Turn-on delay time	Input 115VAC (full load)	-	-	2000	mS
	Input 220VAC (full load)	-	-		
Power-off hold up time	Input 115VAC (full load)	-	10	-	mS
	Input 220VAC (full load)	-	50	-	
Dynamic response	25%~50%~25%	-5.0	-	+5.0	%
	50%~75%~50%	-	-	5.0	mS
Output start-up overshoot	Full input voltage range	≤10			%Vo
Short circuit protection		Continuous, Self-recovery			Hiccup
Over current protection	Input 220VAC	120%Io	-	200%Io	mA
Ripple & Noise	5%-100% load, 20MHz bandwidth	-	60	120	mVp-p

Note: The Ripple& Noise is tested by the Parallel-line method, please refer to the following test instruction.

General Specifications


Items	Test Conditions	Min.	Typ.	Max.	Unit
Switching frequency	-	-	65	-	KHz
Operating temperature	Refer to the temperature derating graph	-40	-	+75	°C
Storage temperature	-	-40	-	+85	

Soldering temperature		Wave-soldering		260±4°C, timing 5-10S			
		Manual-soldering		360±8°C, timing 4-7S			
Relative humidity	-		10	-	90	%RH	
Isolation voltage	I/P-O/P	Test 1min, leakage current <5mA		4000	-	-	VAC
Insulation resistance	I/P-O/P	@DC500V		100	-	-	MΩ
MTBF	MIL-HDBK-217F@25°C			300	-	-	K hours
Safety standard	-		IEC/EN62368				
Vibration	-		10-55Hz, 10G, 30Min, along X, Y, Z				
Safety class	-		CLASS II				
Case flame class	-		UL94-V0				
Weights & Dimensions		Part No.	Weight (Typ.)	Dimensions L x W x H			
		FA5-220SXXY2D4	35g	50.80X25.40X15.60 mm		2.000X1.000X0.614 inch	
		FA5-220SXXY2D4-T	55g	76.00X31.50X24.50 mm		2.992X1.240X0.965 inch	
		FA5-220SXXY2D4-TS	75g	76.00X31.50X29.00 mm		2.992X1.240X1.142 inch	

EMC Performance

Items		Test Standards	Performance/Class
EMC	EMI	CE	CISPR32/EN55032 CLASS B
		RE	CISPR32/EN55032 CLASS B
	EMS	RS	IEC/EN61000-4-3 10V/m Perf. Criteria B (with the Recommended EMC Circuit)
		CS	3Vr.m.s Perf. Criteria B (with the Recommended EMC Circuit)
		ESD	Contact ±6KV, Air ±8KV Perf. Criteria B
		Surge	Line to line ±2KV, line to ground ±4KV Perf. Criteria B (with the Recommended EMC Circuit)
		EFT	±2KV Perf. Criteria B
		Voltage dips & interruptions	0%~70% Perf. Criteria B


Product Characteristic Graphs

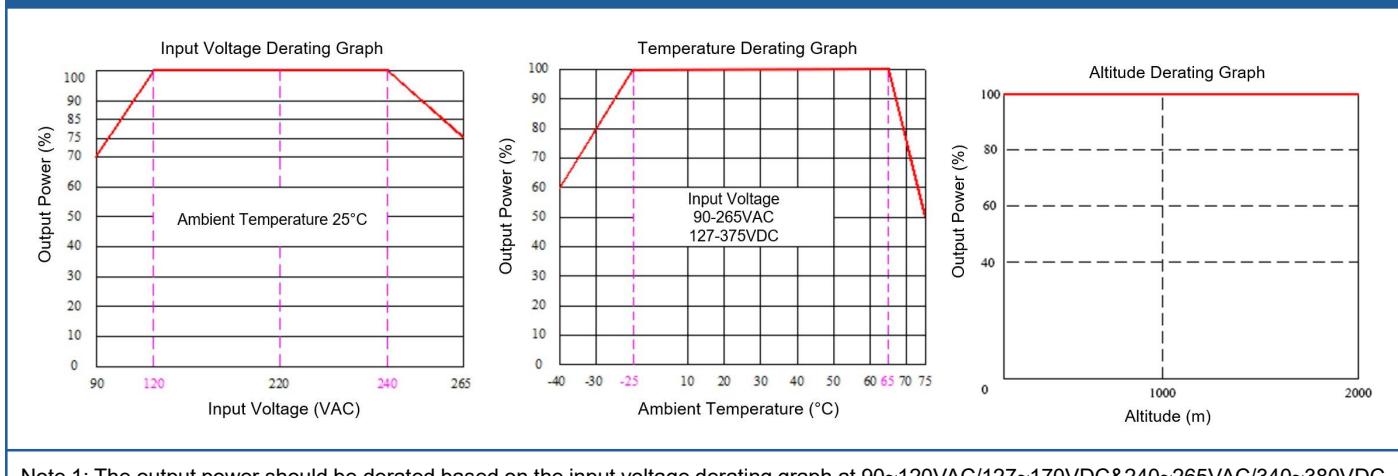

Note 1: The output power should be derated based on the input voltage derating graph at 90~120VAC/127~170VDC&240~265VAC/340~380VDC.

Note 2: This product should operate under the condition of natural air, please contact us if it could be used at a closed space.

Recommended EMC Circuit for Application

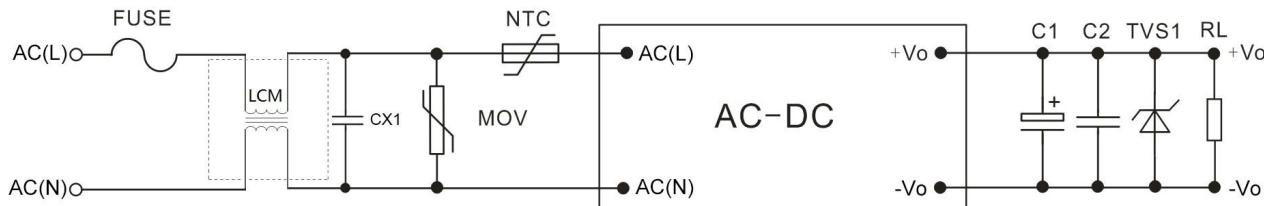


FUSE	2.0A/300VAC time-delay fuse (required)	NTC	5D-11
MOV	10D561K/3500A	LCM	30mH/0.5A
CX1	X2/224K/310VAC	TVS1	See note below

Note:


- 1) A high frequency low impedance electrolytic capacitor is recommended for C1 which capacitance should be less than the Max capacitive load and withstanding voltage more than 1.5x of the output voltage.
- 2) 0.1uF ceramic capacitor is recommended for C2 which withstanding voltage should be more than 1.5x of the output voltage.
- 3) TVS1: SMBJ7.0A for 3.3V & 5V outputs; SMBJ12.0A for 9V output; SMBJ20A for 12V & 15V outputs; SMBJ30.0A for 24V output; SMBJ64A for 48V output.

Ripple & Noise Test Instruction (Parallel-line Method, 20MHZ bandwidth)

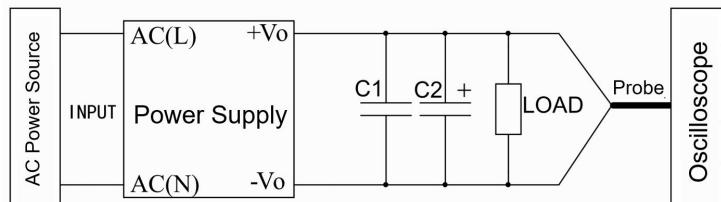

1. The Ripple & Noise test needs the cables in parallel, an oscilloscope that should be set at the Sample Mode, bandwidth 20MHz. 100M bandwidth probe with cap and ground removed. One polypropylene capacitor C1(0.1uF) and one high frequency low impedance electrolytic capacitor C2(10uF) are connected in parallel with the probe.
2. Refer to the test diagram, the converter output connects to the electronic load by the jig with cables which size should be defined according to the output current value. The test can start at the converter output terminals after the input power on.

Mechanical Dimensions

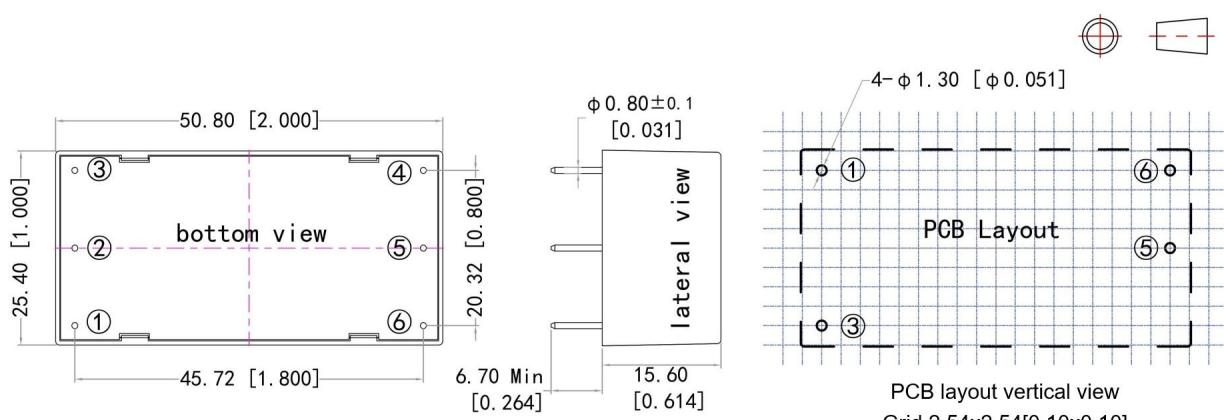


Unit: mm[inch]
General tolerance: ±0.50[±0.020]
Pin diameter tolerance: ±0.10[±0.004]

Pin-out Function Description

Pin No.	1	2	3	4	5	6
Function	AC(N)	No Pin	AC(L)	No Pin	-Vo	+Vo

(-T) Mechanical Dimensions

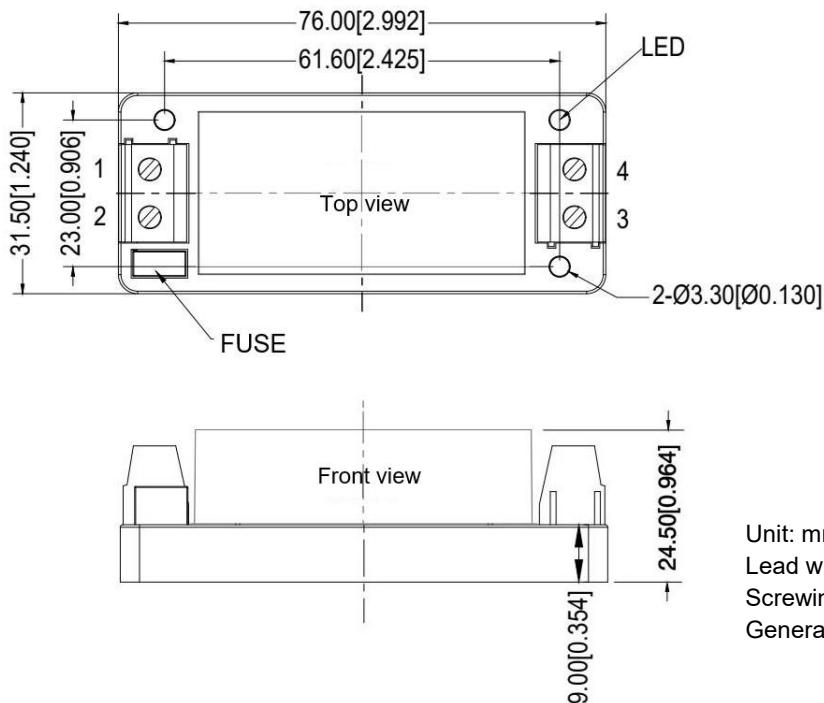


Unit: mm[inch]
Lead wires gauge: 24-12AWG
Screwing torque: 0.4N.m Max
General tolerance: ±1.00[±0.039]

Terminal Function Description

Terminal No.	1	2	3	4
Function	AC(L)	AC(N)	+Vo	-Vo

(-TS) Mechanical Dimensions

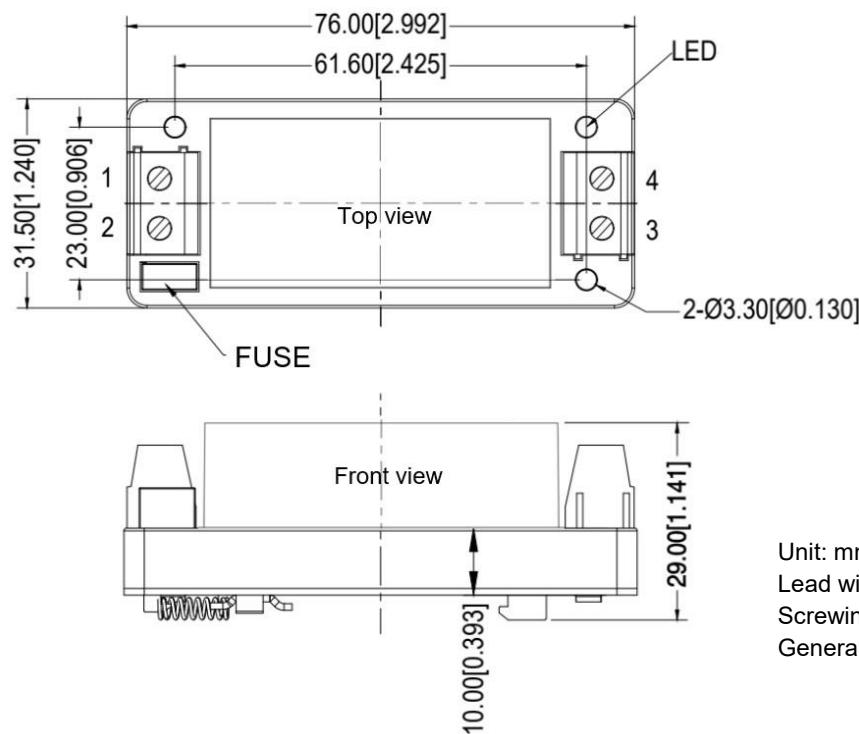

Terminal Function Description

Terminal No.	1	2	3	4
Function	AC(L)	AC(N)	+Vo	-Vo

Application Notice

1. The product should be used according to the specifications, otherwise it could be permanently damaged.
2. The product performance cannot be guaranteed if it works at a lower load than the minimum load defined.
3. The product performance cannot be guaranteed if it works under over-load condition.
4. Unless otherwise specified, all values or indicators on this datasheet are tested at $T_a=25^{\circ}\text{C}$, humidity<75%RH, nominal input voltage and rated load (pure resistance load).
5. All values or indicators on this datasheet have been tested based on Aipupower test specifications.
6. The specifications are specially for the parts listed on this datasheet, any other non-standard model performances could be out of the specifications. Please contact our technician for specific requirements.
7. Aipupower can provide customization service.

Guangzhou Aipu Electron Technology Co., Ltd

Address: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, China

Tel: 86-20-84206763 Fax: 86-20-84206762 HOTLINE: 400-889-8821

E-mail: sales@aipu-elec.com Website: <https://www.aipupower.com>