


Typical Features

- ◆ Wide input voltage range 90-528VAC/127-746VDC
- ◆ No load power consumption $\leq 0.3W$ @230VAC
- ◆ Efficiency up to 84% (Typ.)
- ◆ Operating temperature from -40°C to $+85^{\circ}\text{C}$
- ◆ Switching Frequency 65KHz
- ◆ Short circuit & over current protections
- ◆ Isolation voltage 4000VAC between input & output
- ◆ PCB SIP mounting

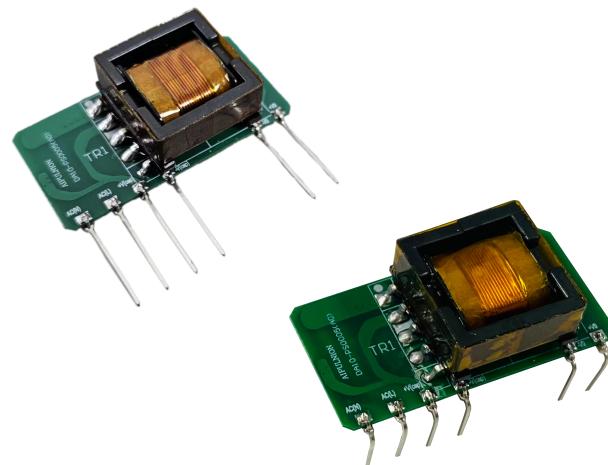

Application Field

DA10-300SXXG9N4 Series ---- Compact size, high efficiency open-frame power supplies with wide input voltage range (both AC and DC available), low ripple, low temperature rise, low standby power consumption, high efficiency, high reliability, safety isolated and compliance with IEC/EN62368/UL62368. This series of products can be widely used in the fields of Industry, Office devices, Electric power and Household devices, etc. The additional circuit for EMC is recommended for the application with high EMC requirement.

Typical Product List

Certificate	Part No.	Input Voltage Range		Output Specifications			Max Capacitive Load @230VAC	Ripple & Noise 20MHz (Max)	Efficiency @full Load 230VAC (Typ.)
		Nominal	Range	Power	Voltage	Current			
		(VAC)	(VAC)	P(W)	Vo (VDC)	Io (mA)			
-	DA10-300S05G9N4(-1)	230	90-528	10	5	2000	4000	80	77
-	DA10-300S12G9N4(-1)				12	833	2000	100	81
-	DA10-300S24G9N4(-1)				24	417	300	150	84

Note 1: The Ripple & Noise should be tested with the external circuit.

Note 2: The typical value of efficiency is based on the product tested after half an hour burn-in at full load.

Note 3: The minimum efficiency could be -2% of the typical value in this table.

Note 4: The Ripple and Noise is tested by the Parallel-line method (please refer to the following test instruction).

Note 5: Please contact Aipu sales for other output voltages requirement of this series but not listed in this table.

Note 6: The suffix -1 indicates the parts with pins 90°bent.

Input Specifications

Item	Test Condition	Min	Typ.	Max	Unit
Input voltage range	AC input	90	230	528	VAC
	DC input	127	325	746	VDC
Input frequency range	-	47	50	63	Hz
Input current	Input 115VAC	-	-	0.30	A
	Input 230VAC	-	-	0.20	

Surge current	Input 115VAC	-	-	10	A	
	Input 230VAC	-	-	17		
No-load power consumption	Input 230VAC	-	-	0.3	W	
	Input 480VAC	-	-	0.5		
Leakage current	-	0.25mA TYP/ 230VAC/ 50Hz				
Recommended external fuse	-	2.0A/500VAC, time-delay fuse (required)				
Hot-plug	-	NA				
ON/OFF Control	-	NA				

Output Specifications

Item	Test Condition		Min.	Typ.	Max.	Unit
Output voltage accuracy	Full input voltage range, any load		-	±2.0	±3.0	%
Line regulation	Rated Load		-	-	±0.5	%
Load regulation	Nominal input voltage, 20%~100% load		-	-	±1.0	%
Minimum load	Single Output		0	-	-	%
Temperature drift coefficient	-		-	±0.03	-	%/°C
Turn-on delay time	Input 230VAC (full load)		-	500	-	ms
Power-off hold up time	Input 400VAC (full load)		-	100	-	ms
Dynamic response	Overshoot range	25%~50%~25%		-5.0	-	+5.0
		50%~75%~50%		-	-	5.0
Output overshoot	Full input voltage range		≤10			%Vo
Short circuit protection			Continuous, self-recovery			Hiccup
Over current protection	Input 230VAC		≥130%Io, self-recovery			Hiccup



General Specifications

Item	Test Condition		Min.	Typ.	Max.	Unit	
Switching frequency	-		60	65	70	KHz	
Operating temperature	Refer to the Temperature Derating Graph		-40	-	+85	°C	
Storage temperature	-		-40	-	+105		
Soldering temperature	Wave-soldering		260±4°C, Time 5-10S				
	Manual-soldering		360±8°C, Time 4-7S				
Relative humidity	-		10	-	90	%RH	
Isolation voltage	I/P-O/P	Test 1min, leakage current ≤5mA		4000	-	VAC	
Insulation resistance	I/P-O/P	@DC500V		100	-	MΩ	
MTBF	MIL-HDBK-217F 25°C		300	-	-	K Hours	
Safety standard			IEC/EN62368/UL62368				
Vibration	-		10-55Hz,10G, 30Min, along X, Y, Z				
Weights & Dimensions	Part No.		Weight (Typ.)		Dimensions L x W x H		
	DA10-300SXXG9N4(-1)		-		45.0x26.0x15.0 mm	1.771x1.023x0.590 inch	

EMC Performance

Items		Test standards	Performance/Class	
EMI	CE	CISPR32/EN55032	CLASS B	(with the Recommend Circuit 2)
	RE	CISPR32/EN55032	CLASS B	(with the Recommend Circuit 2)
EMC	RS	IEC/EN 61000-4-3	10V/m	perf. Criteria B (with the Recommend Circuit 2)
	CS	IEC/EN61000-4-6	10 Vr.m.s	perf. Criteria B (with the Recommend Circuit 2)
	ESD	IEC/EN 61000-4-2	Contact $\pm 4\text{KV}$ /Air $\pm 8\text{KV}$	perf. Criteria B (with the Recommend Circuit 1)
	Surge	IEC/EN 61000-4-5	$\pm 1\text{KV}$	perf. Criteria B (with the Recommend Circuit 1)
			$\pm 2\text{KV}/\pm 4\text{KV}$	perf. Criteria B (with the Recommend Circuit 2)
	EFT	IEC/EN 61000-4-4	$\pm 2\text{KV}$	perf. Criteria B (with the Recommend Circuit 1)
			$\pm 4\text{KV}$	perf. Criteria B (with the Recommend Circuit 2)

Product Characteristics Graphs

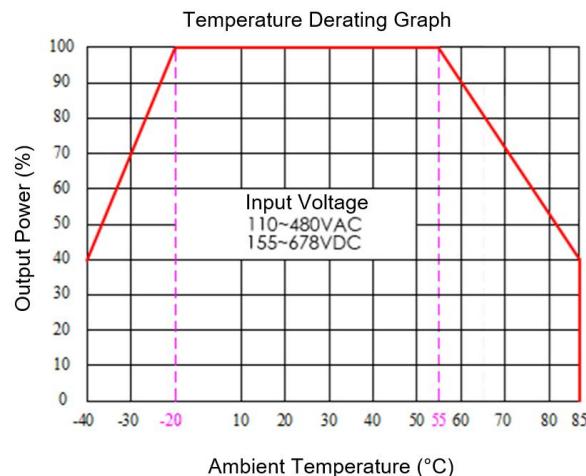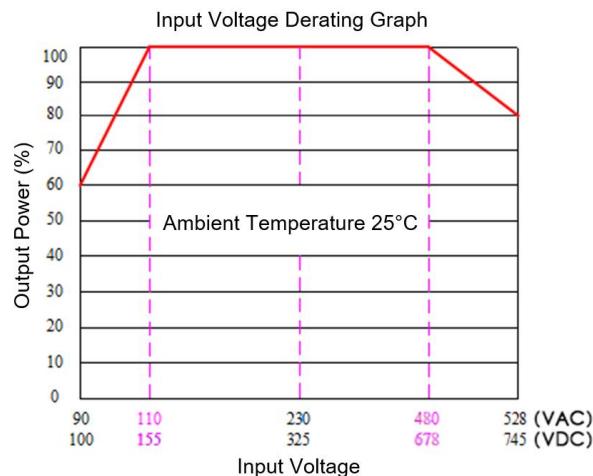

Note 1: The output power should be derated based on the input voltage derating Graph at 90~110VAC/127V~155VDC & 480~528VAC/675~746VDC.

Note 2: This product should operate under the condition of nature air, please contact us if it could be used at a closed space.

Recommended Circuits for Application

1. Typical application circuit diagram

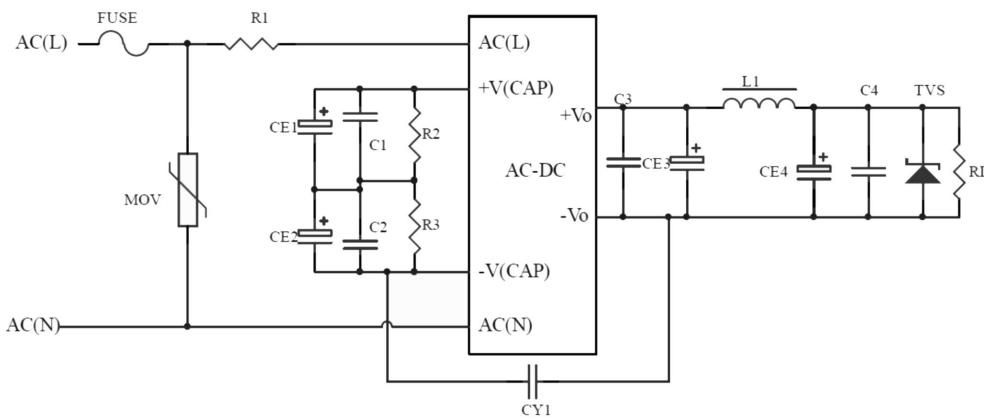


Figure - Circuit 1

Part No.	CE3 (required)	L1 (required)	CE4 (required)	C1, C2	C3, C4	TVS
DA10-300S05G9N4	1000uF/10V	2.2uH/5A	1000uF/10V	0.1uF/630V	0.1uF/50V	SMBJ7.0A
DA10-300S12G9N4	470uF/16V	5.6uH/3A	470uF/16V			SMBJ20A
DA10-300S24G9N4	330uF/35V	5.6uH/3A	100uF/35V			SMBJ30A

Note (All below mentioned components are required for the application):

- 1) 2A/500Vac time-delay fuse is recommended.
- 2) 14D102K Varistor is recommended for MOV.
- 3) 20Ω/1W wire-wound resistor is recommended for R1.
- 4) 47uF/450V electrolytic capacitors are recommended for CE1 & CE2.
- 5) 3M/1206 is recommended for R2 & R3 as the discharge-resistors.
- 6) Y capacitor 470pF/500V is recommended for CY1.

2. Recommended EMC Circuit (for high EMC requirement)

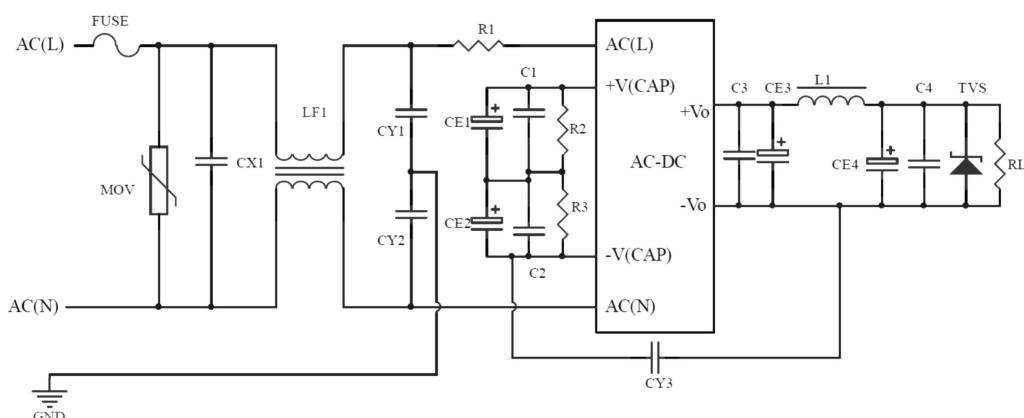



Figure - Circuit 2

Note (All below mentioned components are required for the application):

- 1) 2A/500Vac time-delay fuse is recommended.
- 2) 14D102K Varistor is recommended for MOV.
- 3) 20Ω/1W wire-wound resistor is recommended for R1.
- 4) 470pF/500Vac Y capacitors are recommended for CY1, CY2 & CY3.
- 5) X capacitor (0.33uF/530Vac) is recommended for CX1.
- 6) Common-mode Choke (15mH/0.5A) is recommended for LF1.


Note: The other components can be same recommended as those of typical application circuit 1.

Ripple & Noise Test Instructions (Parallel-line method, 20MHz Bandwidth)

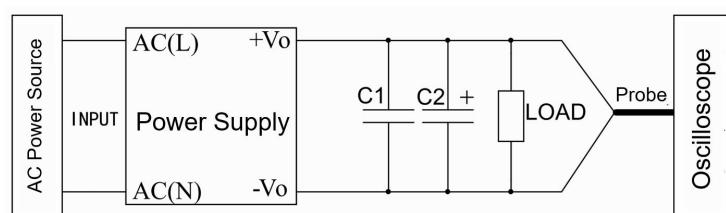

1. The Ripple & Noise test needs the cables in parallel, an oscilloscope that should be set at the Sample Mode, bandwidth 20MHz. 100M bandwidth probe with cap and ground removed. One polypropylene capacitor C1(0.1uF) and one high-frequency low-resistance electrolytic capacitor C2(10uF) are connected in parallel with the probe.
2. Refer to the test diagram, the converter output connects to the electronic load by the jig with cables which size should be defined according to the output current value. The test can start at the converter output terminals after input power on.

DA10-300SXXG9N4 Mechanical Dimensions

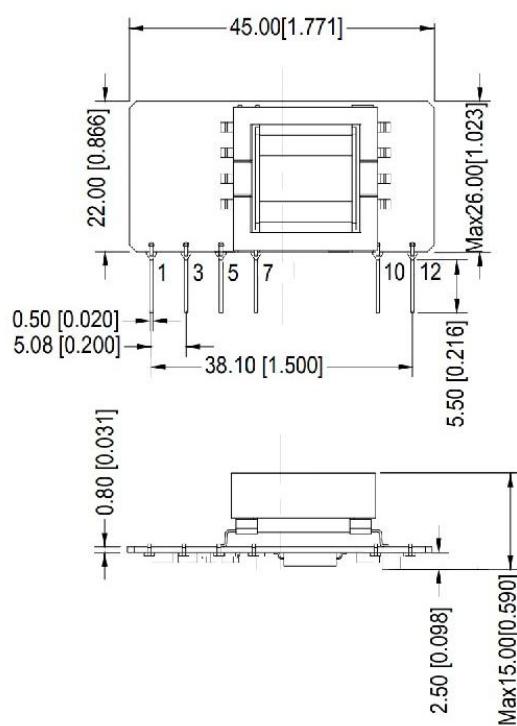


PCB layout vertical view
Grid 2.54x2.54[0.10x0.10]

Unit: mm[inch]
General tolerance: $\pm 1.00[\pm 0.039]$
Pin diameter tolerance: $\pm 0.10[\pm 0.004]$
The components layout is only for reference,
any deviation from the actual unit should be
accepted.

Pin-out Function Description

Pin No.	1	3	5	7	10	12
Function	AC(N)	AC(L)	+V(cap)	-V(cap)	-Vo	+Vo

DA10-300SXXG9N4-1 Mechanical Dimensions

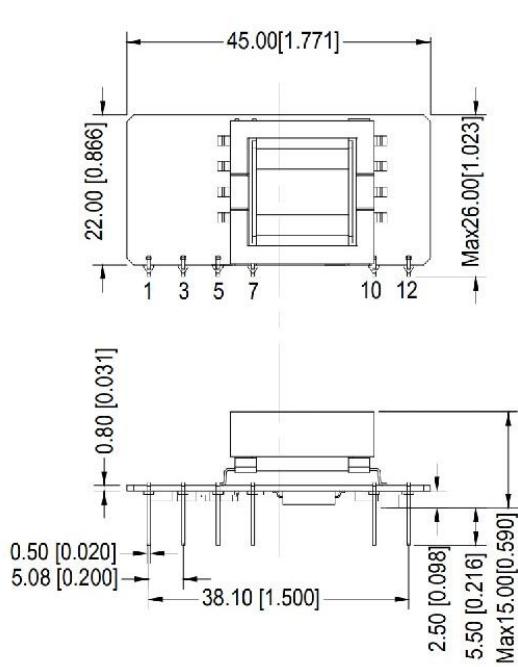

PCB layout vertical view
Grid 2.54x2.54[0.10x0.10]

Unit: mm[inch]
General tolerance: $\pm 1.00[\pm 0.039]$
Pin diameter tolerance: $\pm 0.10[\pm 0.004]$
The components layout is only for reference,
any deviation from the actual unit should be
accepted.

Pin-out Function Description

Pin No.	1	3	5	7	10	12
Function	AC(N)	AC(L)	+V(cap)	-V(cap)	-Vo	+Vo

Application Notice

1. The product should be used according to the specifications, otherwise it could be permanently damaged.
2. A fuse should be used at the input.
3. The product performance cannot be guaranteed if it works at a lower load than the minimum load defined.
4. The product performance cannot be guaranteed if it works under over-load condition.
5. Unless otherwise specified, all values or indicators on this datasheet are tested at $T_a=25^{\circ}\text{C}$, humidity<75%RH, nominal input voltage and rated load (pure resistance load).
6. All values or indicators on this datasheet have been tested based on Aipupower test specifications.
7. The specifications are specially for the parts listed on this datasheet, any other non-standard model performances could be out of the specifications. Please contact our technician for specific requirements.
8. Aipupower can provide customization service.

Guangzhou Aipu Electron Technology Co., Ltd

Address: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, China.

Tel: 86-20-84206763 Fax: 86-20-84206762 HOTLINE: 400-889-8821

E-mail: sales@aipu-elec.com Website: <https://www.aipupower.com>