

Typical Features

- ◆ Wide input voltage range 176-528VAC/248-745VDC
- ◆ No-load power consumption ≤0.55W@230VAC
- ◆ Efficiency 82% (Typ.)
- ◆ Operating temperature from -40°C to +85°C
- ◆ Switching frequency 65KHz
- ◆ Short circuit, over current, over voltage protections
- ◆ Isolation voltage 4000VAC
- ◆ Altitude during operation 4000m Max
- ◆ Compliant with IEC/EN62368/UL62368
- ◆ Conform to CE
- ◆ Enclosed plastic case, flame class UL94-V0
- ◆ PCB DIP mounting



Application Field

FA30-380SXXH2N4(-T) (-TS) Series ----- Compact size, high efficiency modular power supplies with global adapted input voltage range (both AC & DC available), low ripple, low temperature raise, low standby power consumption, high efficiency, high reliability, safety isolated and good EMC performance. This series of products can be widely used in the fields of Electric power, Industrial, Instrument, Smart home devices, etc. The additional circuit diagram for EMC is recommended in this data sheet for the application with high EMC requirement.

Typical Product List

| Certificate | Part No. | Output Specification | | | Capacitive Load @230VAC | Ripple & Noise (Max) 20MHz | Efficiency @Full load 230VAC |
|-------------|-----------------|----------------------|---------|---------|-------------------------|----------------------------|------------------------------|
| | | Power | Voltage | Current | | | |
| | | (W) | (V) | (mA) | uF(Max) | mVp-p | %(Typ.) |
| - | FA30-380S05H2N4 | 30 | 5 | 6000 | 7000 | 100 | 78 |
| | FA30-380S12H2N4 | 30 | 12 | 2500 | 5000 | 120 | 82 |
| | FA30-380S15H2N4 | 30 | 15 | 2000 | 5000 | 120 | 82 |
| | FA30-380S24H2N4 | 30 | 24 | 1250 | 800 | 150 | 85 |

Note 1: The typical value of efficiency is based on the product tested after half an hour burn-in at full load.

Note 2: The full load efficiency should be in ±2% of the typical value in this table. The efficiency is calculated by the way that the full output power is divided by the input power.

Note 3: The Ripple and Noise are tested by the twisted pair method according to the test instruction in the datasheet.

Note 4: The suffix -T indicates a kind of chassis package, -TS indicates a kind of package with DIN Rail.

Note 5: Please contact Aipu sales for other output voltages requirement in this series but not in this table.

Input Specifications

| Item | Operating Condition | Min. | Typ. | Max. | Unit |
|---------------------|---------------------|------|------|------|------|
| Input Voltage Range | AC Input | 176 | 230 | 528 | VAC |
| | DC Input | 248 | 325 | 745 | VDC |

| | | | | | | | |
|---------------------------|--------------|---|----|------|----|--|--|
| Input Frequency Range | - | 47 | 50 | 63 | Hz | | |
| Input Current | 176VAC | - | - | 0.40 | A | | |
| | 230VAC | - | - | 0.32 | | | |
| Surge Current | 176VAC | - | 35 | - | | | |
| | 230VAC | - | 60 | - | | | |
| No Load Power Consumption | Input 176VAC | - | - | 0.55 | W | | |
| | Input 230VAC | - | - | | | | |
| Leakage Current | 230VAC/50Hz | 0.5mA RMS TYP | | | | | |
| Recommended External fuse | - | 2.0-3.15A/600VAC Time-delay fuse, necessary | | | | | |
| Hot plug | - | Unavailable | | | | | |
| Remote control | - | Unavailable | | | | | |

Output Specifications

| Item | | Operating Condition | Min. | Typ. | Max. | Unit | |
|--------------------------|-----------------|--------------------------------------|---------------------------|--------|------|--------|--|
| Voltage Accuracy | | Full input voltage Range, Any load | - | ±2.0 | ±3.0 | % | |
| Line Regulation | | Rated Load | - | - | ±0.5 | % | |
| Load Regulation | | Nominal input voltage, 20%~100% load | - | - | ±1.0 | % | |
| Minimum load | | Single output | 0 | - | - | % | |
| Turn-on Delay Time | | Input 230Vac | - | 2000 | - | mS | |
| | | Input 400Vac | - | | - | | |
| Power-off Hold up Time | | Input 230VAC | - | 35 | - | mS | |
| | | Input 400VAC | - | 100 | - | | |
| Dynamic Response | Overshoot range | 25%~50%~25% 50%~75%~50% | -10 | - | +10 | % | |
| | Recovery time | | -5 | - | +5 | mS | |
| Output Overshooting | | Full input voltage range | ≤10%Vo | | | % | |
| Short Circuit Protection | | | Continuous, Self-recovery | | | Hiccup | |
| Drift Coefficient | | - | - | ±0.02% | - | %/°C | |
| Over Current Protection | | Input 230VAC | ≥120% Io, Self-recovery | | | Hiccup | |
| Over Voltage Protection | | 5VDC Output | ≤7.5 | | | VDC | |
| | | 12VDC Output | ≤20 | | | | |
| | | 15VDC Output | ≤20 | | | | |
| | | 24VDC Output | ≤30 | | | | |
| Ripple & Noise | | - | - | - | 150 | mV | |


General Specifications

| Item | Operating Condition | Min. | Typ. | Max. | Unit |
|-----------------------|--|-----------------------------------|------|------|------|
| Switching Frequency | - | - | 65 | - | KHz |
| Operating Temperature | Refer to the temperature derating graph | -40 | - | +85 | °C |
| Storage Temperature | - | -40 | - | +110 | |
| Soldering Temperature | Wave-soldering | 260±4 °C, timing 5-10S | | | |
| | Manual-soldering | 360±8 °C, timing 4-7S | | | |
| Relative Humidity | - | 10 | - | 90 | %RH |
| Isolation Voltage | I/P-O/P, test 1min, leakage current ≤5mA | 4000 | - | - | VAC |
| | I/P-O/P @DC500V | 100 | - | - | MΩ |
| Safety Standard | - | IEC/EN62368/UL62368 | | | |
| Vibration | - | 10-55Hz, 10G, 30 Min, along X,Y,Z | | | |
| Safety Class | - | CLASS I | | | |
| Flame Class of Case | - | UL94-V0 | | | |
| MTBF | MIL-HDBK-217F@25 °C | >300,000H | | | |
| Unit Weight | Part No. | Weight (Typ.) | | | |
| | FA30-380SXXH2N4 | 122g | | | |
| | FA30-380SXXH2N4-T | 165g | | | |
| | FA30-380SXXH2N4-TS | 205g | | | |

EMC Performance

| Total Item | | Sub Item | Standard | Performance/Class |
|------------|----------------------------|------------------|-----------------|--|
| EMC | EMI | CE | CISPR22/EN55032 | CLASS B |
| | | RE | CISPR22/EN55032 | CLASS B |
| | EMS | RS | IEC/EN61000-4-3 | 10V/m Perf.Criteria A |
| | | CS | IEC/EN61000-4-6 | 3Vr.m.s Perf.Criteria A |
| | | ESD | IEC/EN61000-4-2 | Contact ±6KV / Air ±8KV Perf.Criteria B |
| | | Surge | IEC/EN61000-4-5 | Line to line ±2KV Perf.Criteria B |
| | | | | Line to line ±4KV Perf.Criteria B (with the Recommended Circuit 2, 3) |
| | | EFT | IEC/EN61000-4-4 | ±2KV Perf.Criteria B |
| | | | | ±4KV Perf.Criteria B (with the Recommended Circuit 2, 3) |
| | Voltage dip & interruption | IEC/EN61000-4-11 | 0%~70% | Perf.Criteria B |

H2 Package Mechanical Dimensions

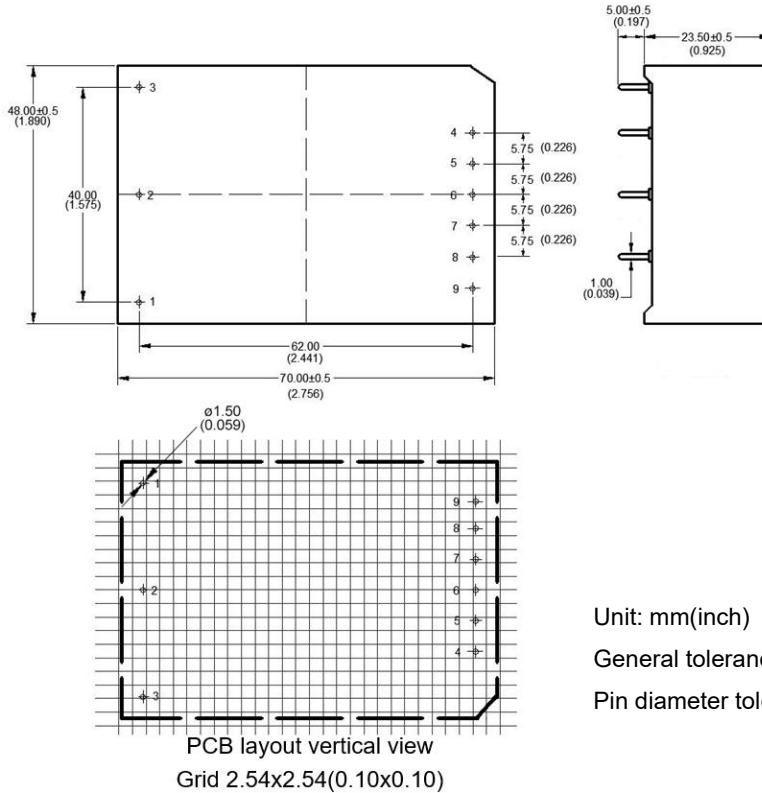


| Pin No. | Function |
|---------|----------|
| 1 | No Pin |
| 2 | AC(N) |
| 3 | AC(L) |
| 4 | +Vout |
| 5 | No Pin |
| 6 | No Pin |
| 7 | No Pin |
| 8 | -Vout |
| 9 | No Pin |

Unit: mm(inch)

General tolerance: ±0.25(0.010)

Pin diameter tolerance: ±0.10(0.004)

H2-T Package Mechanical Dimensions

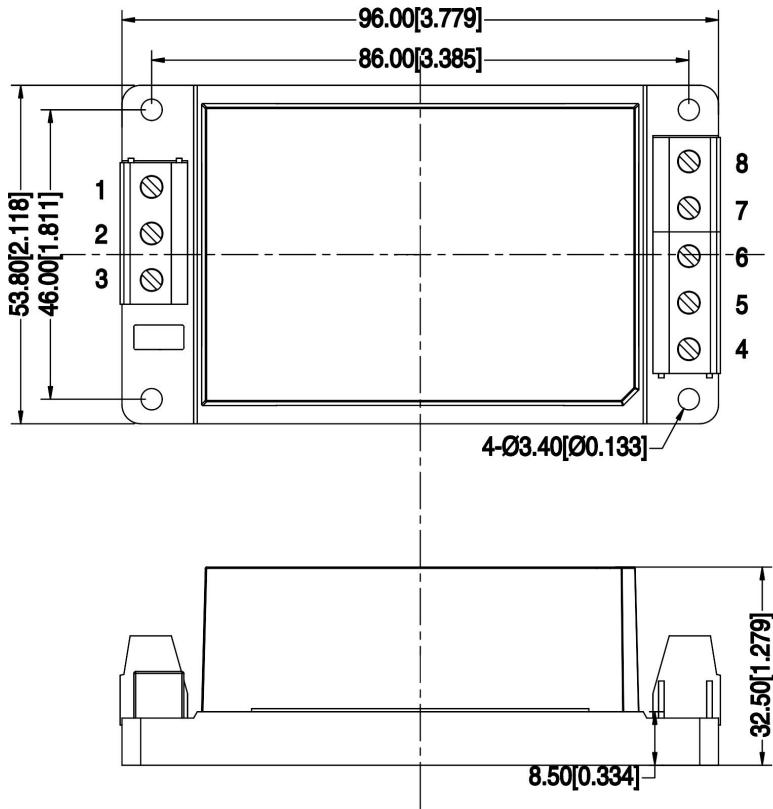

| Terminal No. | Function |
|--------------|---------------|
| 1 | No Connection |
| 2 | AC(N) |
| 3 | AC(L) |
| 4 | +Vout |
| 5 | No Connection |
| 6 | No Connection |
| 7 | No Connection |
| 8 | -Vout |

Note:


Unit: mm[inch]

Lead Wires size: 24-12AWG


Screwing torque: Max 0.4N.m

General tolerance: ±1.00 [±0.039]

H2-TS Package Mechanical Dimensions

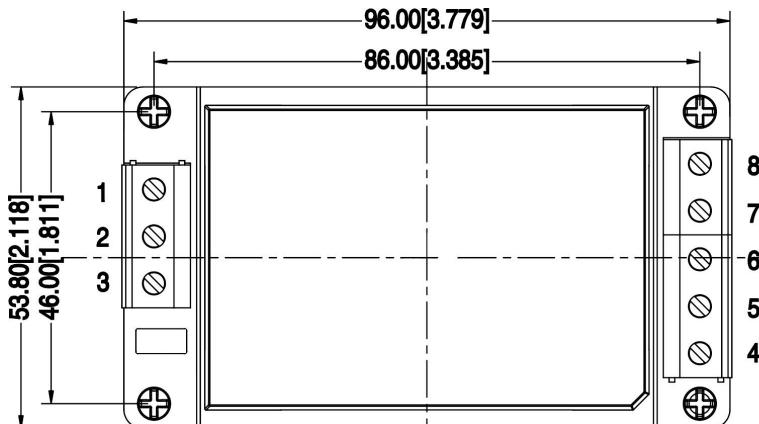

| Terminal No. | Function |
|--------------|---------------|
| 1 | No Connection |
| 2 | AC(N) |
| 3 | AC(L) |
| 4 | +Vout |
| 5 | No Connection |
| 6 | No Connection |
| 7 | No Connection |
| 8 | -Vout |

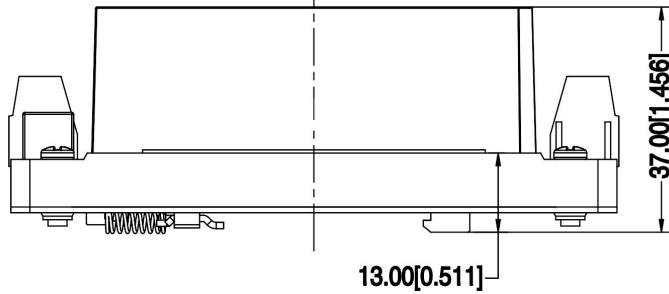

Note:

Unit: mm[inch]

Lead Wires size: 24-12AWG

Screwing torque: Max 0.4 N.m


General tolerance: ±1.00[±0.039]

| Package Code | Dimensions L x W x H | |
|--------------|----------------------|------------------------|
| H2 | 70.00X48.00X23.50 mm | 2.756X1.890X0.925 inch |
| H2-T | 96.00X53.80X32.50 mm | 3.779X2.118X1.279 inch |
| H2-TS | 96.00X53.80X37.00 mm | 3.779X2.118X1.456 inch |




Ripple & Noise Test Instruction (Twisted Pair Method, 20MHz Bandwidth)

1) The Ripple & noise test need 12# twisted pair cables, an oscilloscope which bandwidth should be set to 20MHz, 0.1uF polypropylene capacitor and 10uF high-frequency low-resistance electrolytic capacitor are connected in parallel with the probes (100M bandwidth). The oscilloscope should be set at the Sample Mode.

2) The test diagram is shown on the right. The converter output connects to the electronic load by the jig with cables which size should be defined according to the output current value. The twisted pair (length 30cm±2 cm) should be connected in parallel with the load, the location is as close as possible to the output pins or terminals. The test can be start after input power on.

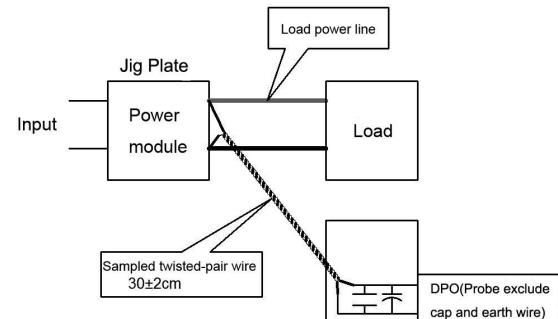

Product Characteristics Graphs

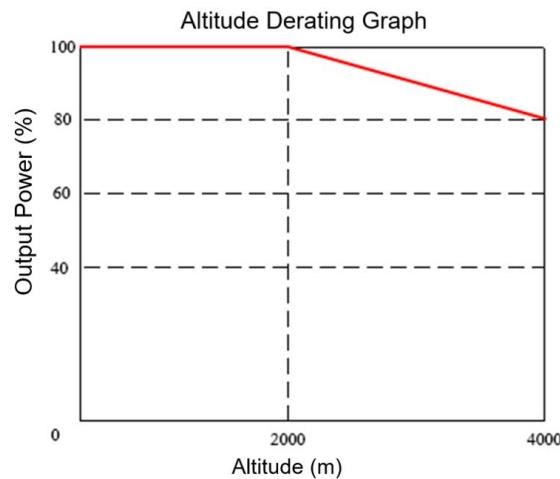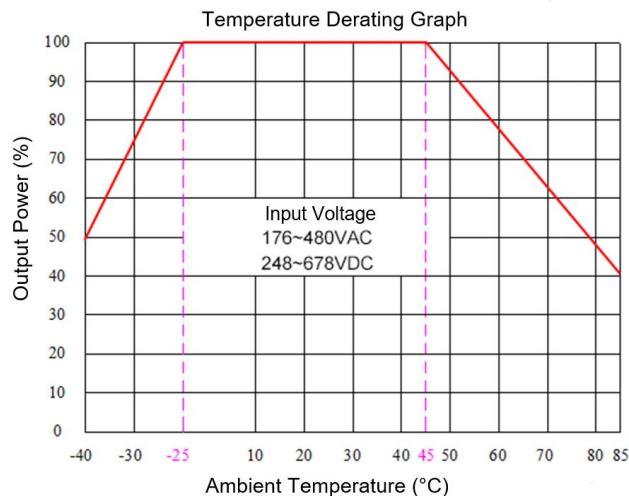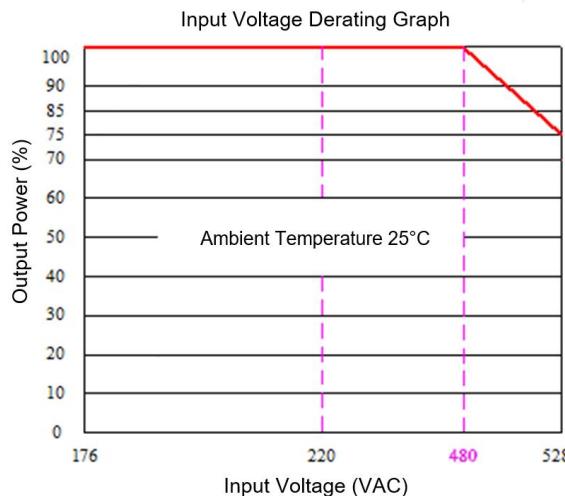

Note 1: The output power should be derated based on the input voltage derating graph at 480~528VAC/678~745VDC.

Note 2: This product should operate at natural air condition, please contact us if it need be used at a closed space.

Recommended Circuits Diagrams for Application

1. Typical Application Circuit

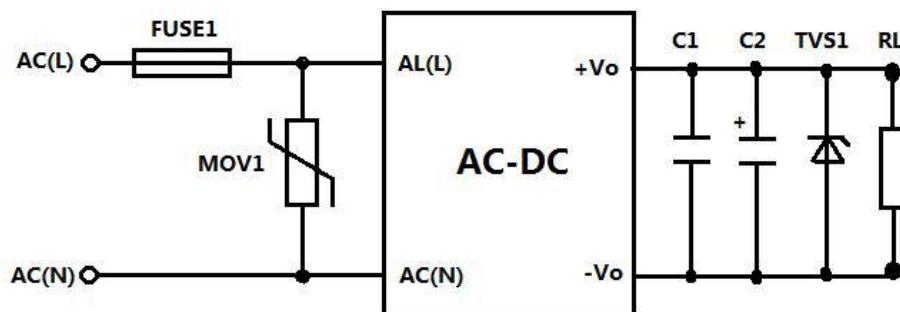


Figure - Circuit 1

2. Recommended EMC Circuit Diagram

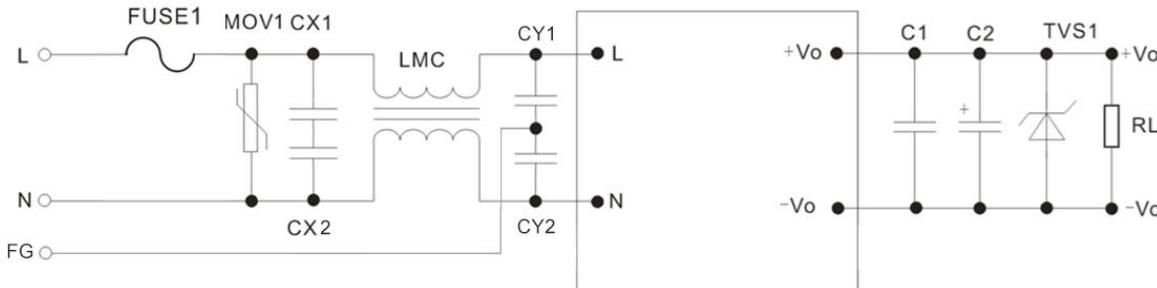


Figure - Circuit 2

| Part No. | FUSE1 | MOV1 | C1 | C2 | TVS1 |
|-----------------|-------------------------------|----------|-----------|-----------|---------|
| FA30-380S05H2N4 | 2.5A/600VAC | 14D911K/ | 330uF/10V | SMBJ7.0A | |
| FA30-380S12H2N4 | Time-delay fuse, necessary | 4500A | 1uF/50V | 220uF/16V | SMBJ20A |
| FA30-380S15H2N4 | | | | 220uF/25V | SMBJ20A |
| FA30-380S24H2N4 | | | | 220uF/35V | SMBJ30A |

Note:

- 1) X capacitors (X2/334K/300VAC) are recommended for CX1 & CX2.
- 2) LMC is a common mode choke, 25mH/0.6A is recommended.
- 3) High-frequency low-resistance electrolytic capacitor is recommended for C2 as the output filter capacitor, please refer to the technical specification provided by its manufacturer for the capacitance and current values. Its withstand voltage should be decreased at least 80% of rated. C1 is a ceramic SMD capacitor to suppress high-frequency noise.
- 4) Y capacitors (Y1/102M/400VAC) are recommended for CY1 & CY2.
- 5) TVS1 is recommended to protect the output circuit when the converter operates at abnormal condition.

3. Recommended circuit diagrams for strong Lightning surge situation

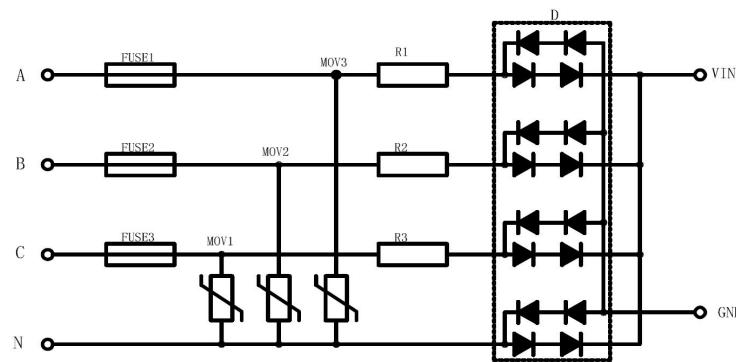


Figure - Circuit 3 (4KV Differential mode surge – Full-wave rectification circuit)

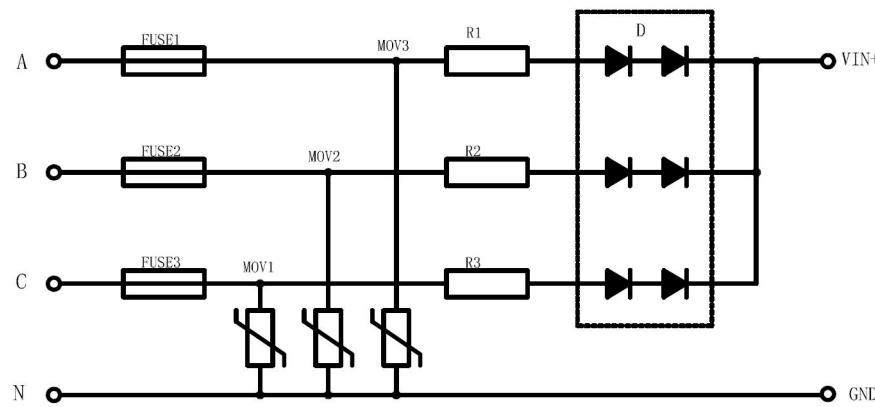


Figure - Circuit 4 (4kV Differential mode surge – Half-wave rectification circuit)

| Component No. | Recommended Parameters |
|---------------------|--|
| MOV1, MOV2, MOV3 | 20D911K/4500A |
| D | 2A/1000V (Rectifier diode) |
| R1, R2, R3 | 10Ω/5W (Wire-wound resistors) |
| FUSE1, FUSE2, FUSE3 | 2.5A/600VAC Time-delay fuse, necessary |

Application Notice

1. The products should be used according to the specifications in this datasheet, otherwise it could be permanently damaged.
2. A fuse should be connected at input.
3. The product performance in this datasheet cannot be guaranteed if it works at a lower load than the minimum load defined.
4. The product performance in this datasheet cannot be guaranteed if it works at over-load condition.
5. Unless otherwise specified, all values or indicators in this datasheet are tested at $T_a=25^{\circ}\text{C}$, humidity<75%RH, nominal input voltage and rated load (pure resistance load).
6. All values or indicators in this datasheet had been tested based on Aipupower test specifications.
7. The specifications are specially for the parts listed in this datasheet, any other non-standard model performances could be out of the specifications. Please contact our technician for specific requirements.
8. Aipupower can provide customization service.

Guangzhou Aipu Electron Technology Co., Ltd

Address: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, China.

Tel: 86-20-84206763 Fax: 86-20-84206762 HOTLINE: 400-889-8821

E-mail: sales@aipu-elec.com Website: <https://www.aipupower.com>